


### FEATURES

- High Output Power:  $P_{1dB} = 20.5dBm(Typ.)$
- High Gain:  $G_{1dB} = 7.5dB(Typ.)$
- High PAE:  $\eta_{add} = 26\%(Typ.)$
- Proven Reliability
- Hermetic Metal/Ceramic Package

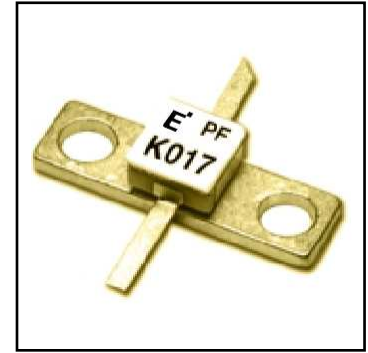

### DESCRIPTION

The FLK017WF is a power GaAs FET that is designed for general purpose applications in the Ku-Band frequency range as it provides superior power, gain, and efficiency.

Eudyna stringent Quality Assurance Program assures the highest reliability and consistent performance.

### ABSOLUTE MAXIMUM RATING (Ambient Temperature $T_a=25^\circ C$ )

| Item                    | Symbol    | Condition          | Rating      | Unit       |
|-------------------------|-----------|--------------------|-------------|------------|
| Drain-Source Voltage    | $V_{DS}$  |                    | 15          | V          |
| Gate-Source Voltage     | $V_{GS}$  |                    | -5          | V          |
| Total Power Dissipation | $P_T$     | $T_C = 25^\circ C$ | 1.15        | W          |
| Storage Temperature     | $T_{stg}$ |                    | -65 to +175 | $^\circ C$ |
| Channel Temperature     | $T_{ch}$  |                    | 175         | $^\circ C$ |

Eudyna recommends the following conditions for the reliable operation of GaAs FETs:

1. The drain-source operating voltage ( $V_{DS}$ ) should not exceed 10 volts.
2. The forward and reverse gate currents should not exceed 1.34 and -0.05 mA respectively with gate resistance of 3000 $\Omega$ .
3. The operating channel temperature ( $T_{ch}$ ) should not exceed 145 $^\circ C$ .

### ELECTRICAL CHARACTERISTICS (Ambient Temperature $T_a=25^\circ C$ )

| Item                          | Symbol       | Test Conditions   | Limit |      |      | Unit         |
|-------------------------------|--------------|---|-------|------|------|--------------|
|                               |              |   | Min.  | Typ. | Max. |              |
| Saturated Drain Current       | $I_{DSS}$    | $V_{DS} = 5V, V_{GS} = 0V$  | -     | 60   | 90   | mA           |
| Transconductance              | $g_m$        | $V_{DS} = 5V, I_{DS} = 40mA$  | -     | 30   | -    | mS           |
| Pinch-off Voltage             | $V_p$        | $V_{DS} = 5V, I_{DS} = 3mA$   | -1.0  | -2.0 | -3.5 | V            |
| Gate Source Breakdown Voltage | $V_{GSO}$    | $I_{GS} = -3\mu A$  | -5    | -    | -    | V            |
| Output Power at 1dB G.C.P.    | $P_{1dB}$    | $V_{DS} = 10V,$<br>$I_{DS} = 0.6 I_{DSS} (Typ.),$<br>$f = 14.5 GHz$ | 19.5  | 20.5 | -    | dBm          |
| Power Gain at 1dB G.C.P.      | $G_{1dB}$    |   | 6.0   | 7.5  | -    | dB           |
| Power-added Efficiency        | $\eta_{add}$ |   | -     | 26   | -    | %            |
| Noise Figure                  | NF           | $V_{DS} = 3V,$<br>$I_{DS} = 20mA (Typ.),$<br>$f = 12 GHz$           | -     | 2.5  | -    | dB           |
| Associated Gain               | $G_{as}$     |   | -     | 7    | -    | dB           |
| Thermal Resistance            | $R_{th}$     | Channel to Case   | -     | 65   | 130  | $^\circ C/W$ |


CASE STYLE: WF

G.C.P.: Gain Compression Point


# FLK017WF

X, Ku Band Power GaAs FET


### POWER DERATING CURVE

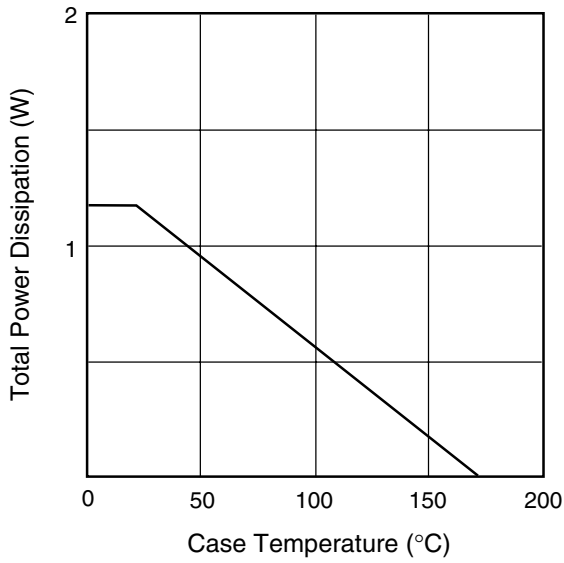

### DRAIN CURRENT vs. DRAIN-SOURCE VOLTAGE

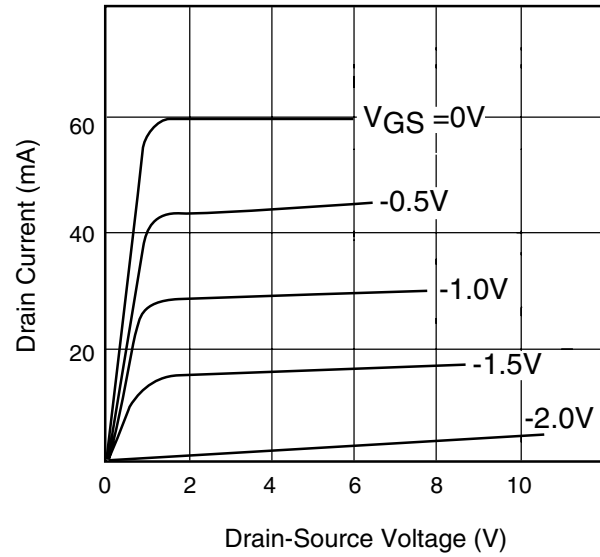


### OUTPUT POWER vs. INPUT POWER

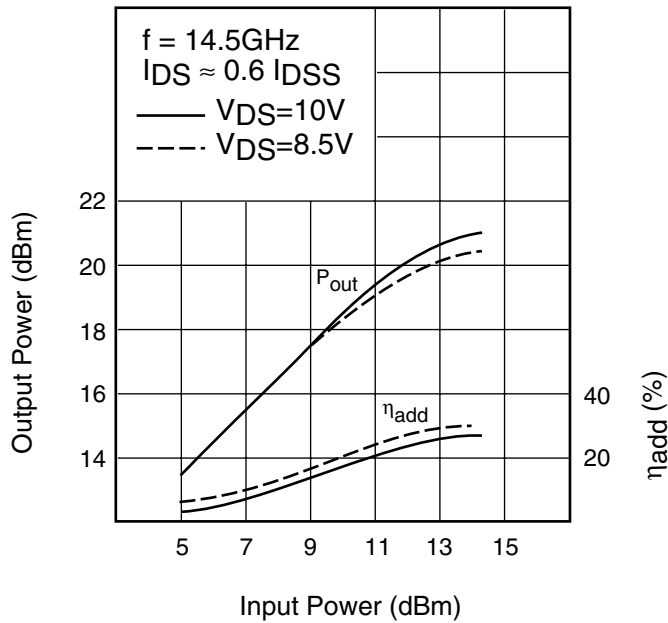

# FLK017WF

## X, Ku Band Power GaAs FET

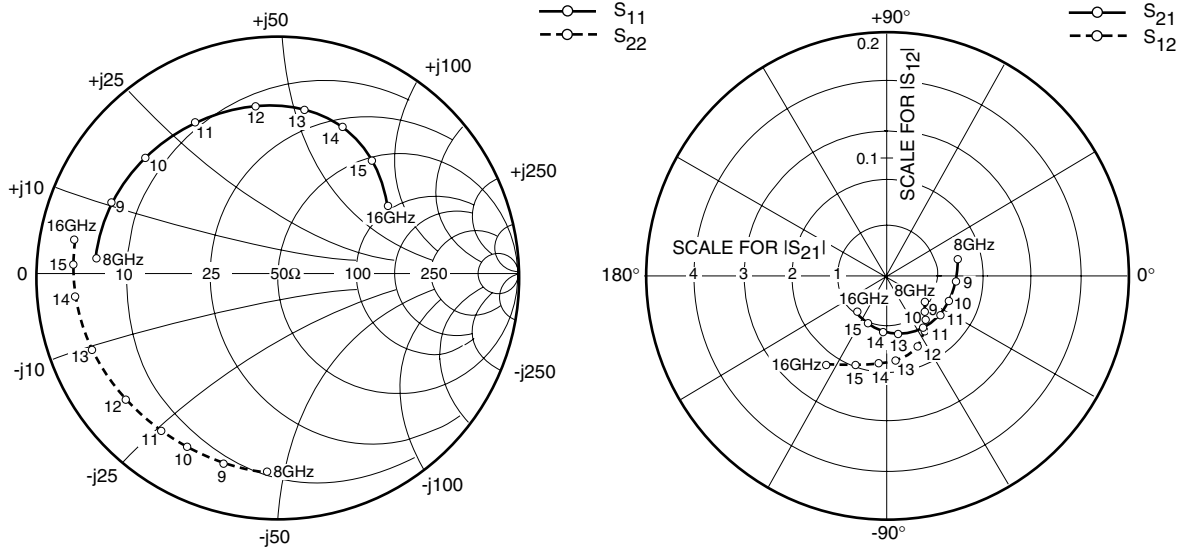

### S-PARAMETERS

$V_{DS} = 10V, I_{DS} = 40mA$

| FREQUENCY<br>(MHZ) | S11  |       | S21   |        | S12  |        | S22  |        |
|--------------------|------|-------|-------|--------|------|--------|------|--------|
|                    | MAG  | ANG   | MAG   | ANG    | MAG  | ANG    | MAG  | ANG    |
| 500                | .990 | -15.9 | 2.892 | 166.0  | .006 | 77.2   | .852 | -7.9   |
| 1000               | .978 | -31.4 | 2.836 | 152.3  | .011 | 65.7   | .850 | -16.3  |
| 8000               | .750 | 175.7 | 1.539 | 14.1   | .038 | -35.2  | .818 | -93.7  |
| 9000               | .737 | 157.2 | 1.436 | -3.8   | .041 | -39.2  | .816 | -106.0 |
| 10000              | .727 | 139.7 | 1.367 | -20.1  | .047 | -44.7  | .812 | -116.2 |
| 11000              | .708 | 119.9 | 1.345 | -37.4  | .055 | -53.8  | .812 | -126.5 |
| 12000              | .689 | 98.4  | 1.307 | -57.1  | .064 | -66.4  | .817 | -140.3 |
| 13000              | .679 | 80.5  | 1.208 | -76.9  | .069 | -82.5  | .823 | -157.4 |
| 14000              | .656 | 66.3  | 1.088 | -95.4  | .071 | -96.0  | .840 | -173.1 |
| 15000              | .606 | 50.8  | 1.003 | -112.1 | .076 | -109.7 | .852 | 177.7  |
| 16000              | .526 | 32.0  | .976  | -129.4 | .088 | -126.8 | .848 | 170.7  |

