

Photocells B 1060, V 1060

Metal housing TO types





Street Light control

Combustion control

This range of Photocells includes metal housings in 2 different sizes, TO-8 and TO-5.

Operating Temperature Range: -20...+70 °C (non continuous)



Storage Temperature Range: -20...+80 °C (non continuous)



Type	R ₁₀	R ₁₀₀	R ₀₁	R ₀₅	V _{max}	P _{max}	γ _{10/100}	λ _{peak}
units	KΩ	KΩ typ.	MΩ min	MΩ min	V	mW	typ.	nm
B 1060 23	4...15	1,6	0,1	0,3	300	90	0,8	600
V 1060 21	2,9...5,5	1,0	0,02	0,06	150	90	0,8	600
V 1060 21	5...9	1,6	0,06	0,18	150	90	1,30,9	600
V 1060 31	40...120	25	0,5	1,5	300	90	0,6	600
V 1060 32	100...220	35	1,0	3,0	300	90	0,65	600

B 10...

V 10...

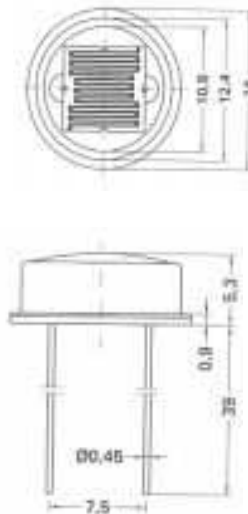

all
Dimensions
in mm.



Europe:
PerkinElmer Optoelectronics
GmbH & CoKG
Wenzel Jaksch Str 31
65199 Wiesbaden / Germany
Phone +49(0)611 492 0
Fax +49(0)611 492 170

USA:
PerkinElmer Optoelectronics
44370 Christy Street
Freemont, CA 94538-3180
Phone +510 979 6500
+800 775 6786
Fax +510 687 1140

Asia:
PerkinElmer Optoelectronics
47, Ayer Rajah Crescent #06-12
Singapore 139947
Phone +65 775 2022
Fax +65 775 1008

EXCELITAS
TECHNOLOGIES

www.excelitas.com

©2011 Excelitas Technologies Corp. All rights reserved. Excelitas® is a registered trademark of Excelitas Technologies Corp. All other trademarks are the property of their respective owners.

