

Photocells D 1160, D 1172, W 5560

Glass encapsulated housing



Combustion Control Applications

This Data show two different glass encapsulated photocells in various selections.

Operating Temperature Range: -20...+70 °C (non continuous)

Storage Temperature Range: -20...+80 °C (non continuous)



*)Operating Temperature Range: -20...+60 °C (non continuous)



Type	R ₁₀	R ₁₀₀	R ₀₁	R ₀₅	V _{max}	P _{max}	γ _{10/100}	λ _{peak}
units	KΩ	KΩ typ.	MΩ min	MΩ min	V	mW	typ.	nm
D1160 12	1,3...2,5	0,5	0,01	0,03	100	150	0,6	600
D1160 13	2...6	0,8	0,02	0,09	100	150	0,7	600
D1172 12, *)	8...60	2,0	0,5	1,5	50	100	1,1	720
W5560 11	0,7...1,5	0,25	0,01	0,03	250	250	0,6	600
W5560 12	1,0...2,0	0,35	0,02	0,06	250	250	0,65	600
W5560 13	1,5...6,0	0,6	0,05	0,15	250	250	0,75	600
W5560 14	5...30	1,5	0,5	1,5	250	250	0,85	600

W 55...

D 11...

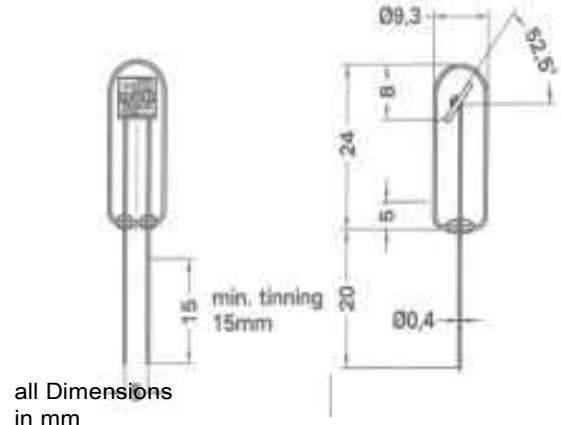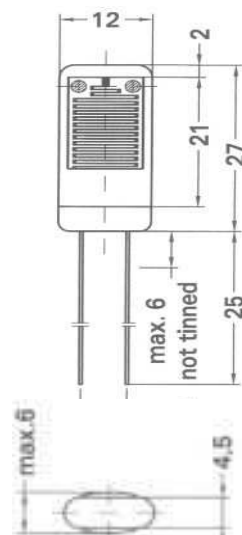

all Dimensions
in mm

Europe:
Excelitas Technologies
Wenzel Jaksch Str 31
65199 Wiesbaden / Germany
Phone +49(0)611 492 0
Fax +49(0)611 492 170

USA:
Excelitas Technologies
44370 Christy Street
Freemont, CA 94538-3180
Phone +510 979 6500
+800 775 6786
Fax +510 687 1140

Asia:
Excelitas Technologies
47, Ayer Rajah Crescent #06-12
Singapore 139947
Phone +65 775 2022
Fax +65 775 1008

EXCELITAS
TECHNOLOGIES

www.excelitas.com

©2011 Excelitas Technologies Corp. All rights reserved. Excelitas® is a registered trademark of Excelitas Technologies Corp. All other tradem