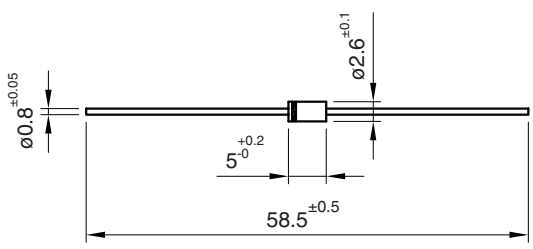



## 1 Amp. Glass Passivated Fast Recovery Rectifier

<p><b>Dimensions in mm.</b></p> <p style="text-align: right;"><b>DO-41 (Plastic)</b></p>  <p><b>Mounting instructions</b></p> <ol style="list-style-type: none"> <li>1. Min. distance from body to soldering point, 4 mm.</li> <li>2. Max. solder temperature, 350 °C.</li> <li>3. Max. soldering time, 3.5 sec.</li> <li>4. Do not bend lead at a point closer than 2 mm. to the body.</li> </ol>	<p><b>Voltage</b> 50 to 600 V</p> <p><b>Current</b> 1.0 A at 75 °C</p> 	<ul style="list-style-type: none"> <li>• <b>Glass passivated junction</b></li> <li>• High current capability</li> <li>• The plastic material carries U/L recognition 94 V-0</li> <li>• Terminals: Axial Leads</li> <li>• Polarity: Color band denotes cathode</li> </ul>
---	---	--

### Maximum Ratings, according to IEC publication No. 134


		1N 4933GP	1N 4934GP	1N 4935GP	1N 4936GP	1N 4937GP
$V_{RRM}$	Peak Recurrent Reverse Voltage (V)	50	100	200	400	600
$I_{F(AV)}$	Forward Current at $T_{amb} = 75\text{ °C}$	1.0 A				
$I_{FRM}$	Recurrent Peak Forward Current	10 A				
$I_{FSM}$	8.3 ms. Peak Forward Surge Current (Jedec Method)	30 A				
$t_{rr}$	Maximum reverse recovery time from $I_F = 0.5\text{ A}; I_R = 1\text{ A}; I_{RR} = 0.25\text{ A}$	150 ns				
$T_j$	Operating Temperature Range	-65 to +175°C				
$T_{stg}$	Storage Temperature Range	-65 to +175°C				
$E_{RSM}$	Maximum non Repetitive Peak Reverse Avalanche energy. $I_R = 0.5\text{ A}; T_j = 25\text{ °C}$	20 mJ				

### Electrical Characteristics at $T_{amb} = 25\text{ °C}$


$V_F$	Maximum Forward Voltage Drop at $I_F = 1\text{ A}$	1.2 V
$I_R$	Maximum Reverse Current at $V_{RRM}$	5 $\mu\text{A}$
	at 25 °C	100 $\mu\text{A}$
	at 125 °C	
$R_{th(j-a)}$	Thermal Resistance ( $l = 10\text{mm.}$ )	Max. 60 °C/W
	Typ.	45 °C/W

**Rating And Characteristic Curves**


TYPICAL FORWARD CHARACTERISTIC

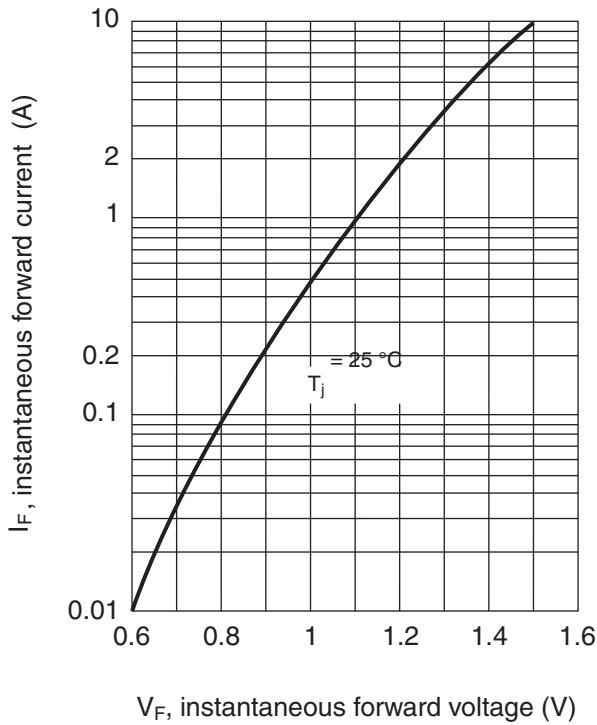

FORWARD CURRENT DERATING CURVE

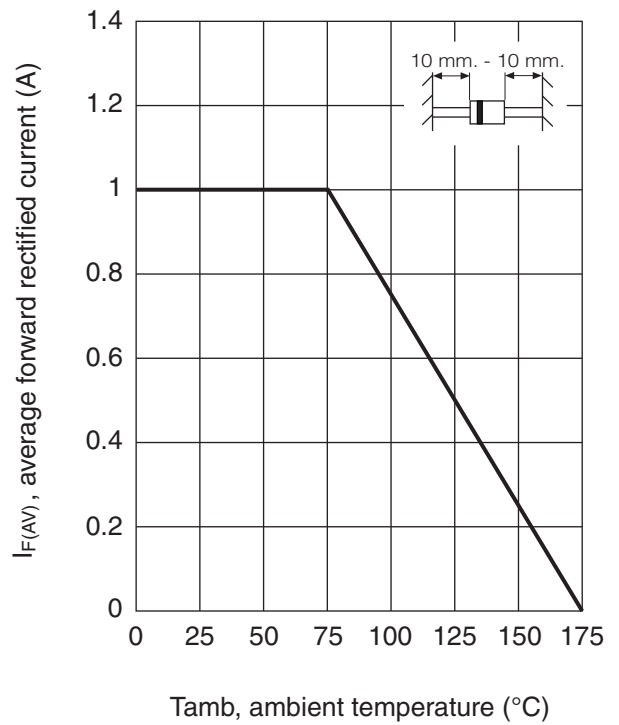

MAXIMUM NON REPETITIVE PEAK FORWARD SURGE CURRENT

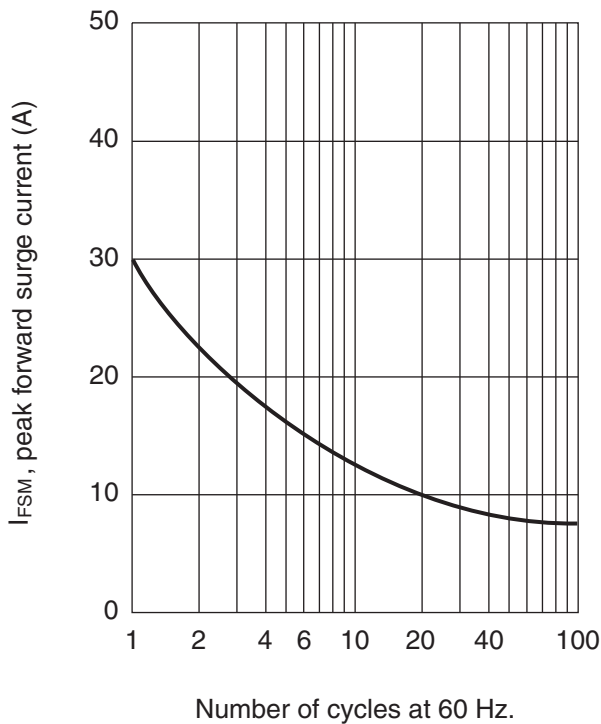

TYPICAL JUNCTION CAPACITANCE

