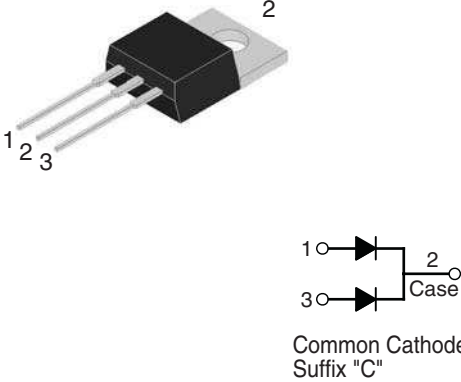


16 Amp. Glass Passivated Fast Recovery Rectifier

<p>TO-220AB</p>  <p style="text-align: center;">Common Cathode Suffix "C"</p>	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center; width: 50%;">Voltage 400 to 1000 V</td> <td style="text-align: center; width: 50%;">Current 16 A</td> </tr> </table> <ul style="list-style-type: none"> Glass Passivated Junction High current capability The plastic material U/L recognition 94 V-0 Terminals: Leads solderable per MIL-STD202 Low forward Voltage drop 	Voltage 400 to 1000 V	Current 16 A
Voltage 400 to 1000 V	Current 16 A		

Absolute Maximum Ratings, according to IEC publication No. 134


		FR1604G	FR1605G	FR1607G
V_{RRM}	Peak recurrent reverse voltage (V)	400	600	1000
V_{RMS}	Maximum RMS voltage (V)	280	420	700
V_{DC}	Maximum DC blocking voltage (V)	400	600	1000
$I_{F(AV)}$	Maximum Average Forward current at $T_C = 105\text{ }^\circ\text{C}$ (both diodes conducting)	16 A		
I_{FSM}	8.3 ms. peak forward surge current (Jedec Method)	150 A		
t_{RR}	Max. reverse recovery time from $I_F = 0.5\text{ A}$; $I_R = 1\text{ A}$; $I_{RR} = 0.25\text{ A}$	150 ns	250 ns	500 ns
C_j	Typical Junction Capacitance at 1 MHz and reverse voltage of $4V_{DC}$	60 pF		
T_j	Operating temperature range	- 65 to + 150 $^\circ\text{C}$		
T_{stg}	Storage temperature range	- 65 to + 150 $^\circ\text{C}$		

Electrical Characteristics


		FR1604G	FR1605G	FR1607G
V_F	Max. forward voltage drop at $I_F = 8\text{ A}$ $T_j = 25\text{ }^\circ\text{C}$	1.3 V		
I_R	Max. Instantaneous reverse current at $V_R = V_{RRMax}$ $T_j = 25\text{ }^\circ\text{C}$	5 μA		
		$T_j = 125\text{ }^\circ\text{C}$ 100 μA		
R_{thj-C}	Typical Thermal Resistance	3.0 $^\circ\text{C/W}$		

16 Amp. Glass Passivated Fast Recovery Rectifier


TYPICAL FORWARD CHARACTERISTIC

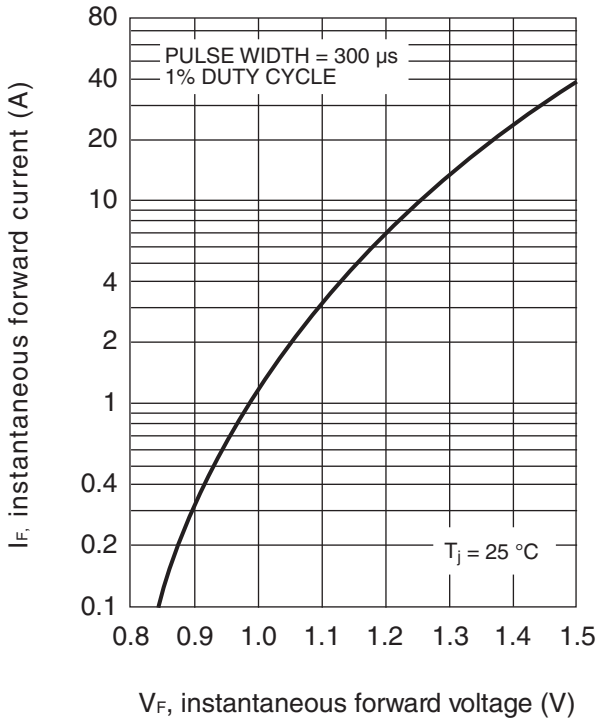


FORWARD CURRENT DERATING CURVE

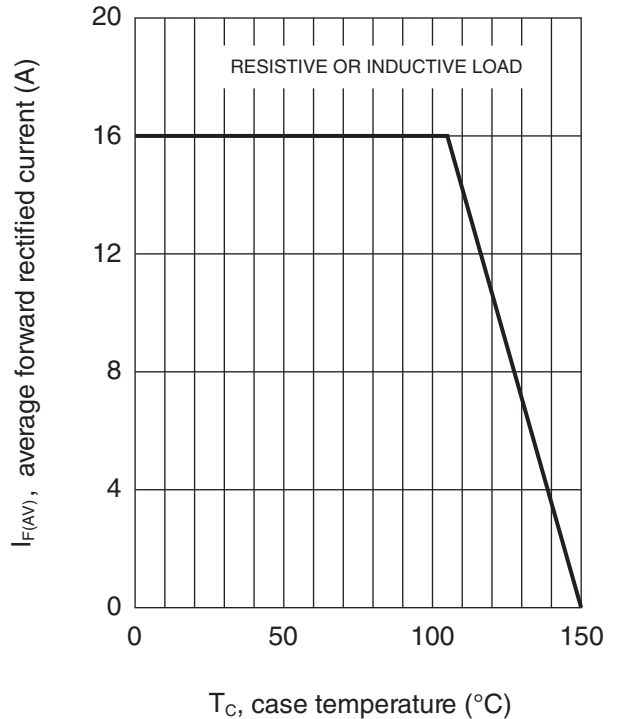

MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

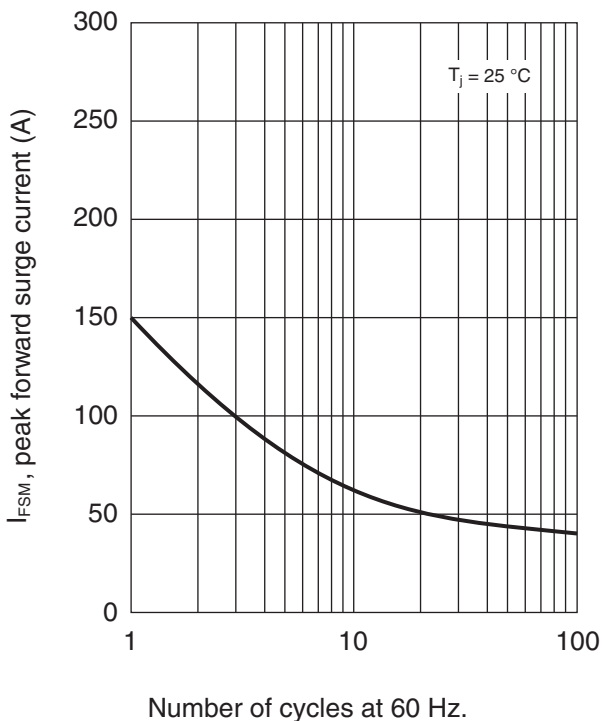


TYPICAL JUNCTION CAPACITANCE

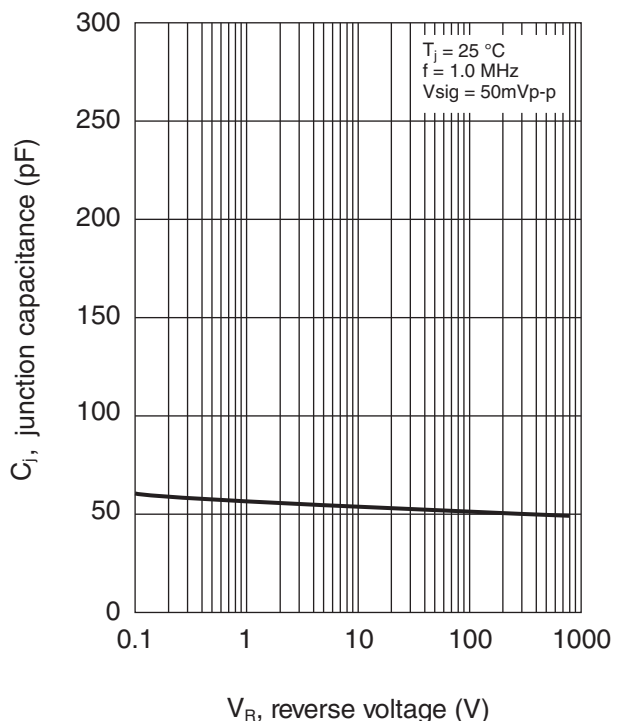

16 Amp. Glass Passivated Fast Recovery Rectifier

PACKAGE MECHANICAL DATA

TO-220AB

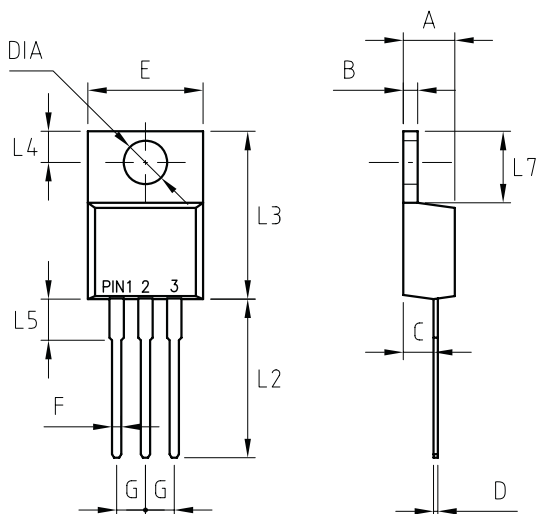

REF.	DIMENSIONS	
	Milimeters	
	Min.	Max.
A	4.44	4.70
B	1.14	1.40
C	2.54	2.79
D	0.35	0.64
E	--	10.5
F	0.68	0.94
G	2.41	2.67
L2	13.46	14.22
L3	14.90	15.10
L4	2.62	2.87
L5	3.56	4.06
L7	5.84	6.86
DIA	3.74	3.91