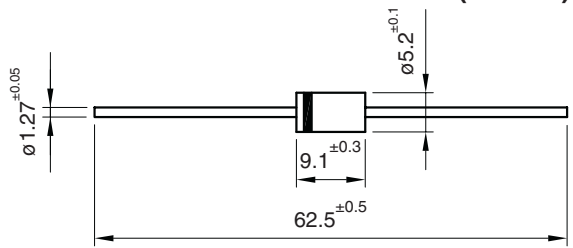



2.3 Amp. Very Fast Recovery Glass Passivated Avalanche Diode

<p>Dimensions in mm.</p> <p style="text-align: right;">DO-201AD (Plastic)</p>  <p>Mounting instructions</p> <ol style="list-style-type: none"> 1. Min. distance from body to soldering point, 4 mm. 2. Max. solder temperature, 350 °C. 3. Max. soldering time, 3.5 sec. 4. Do not bend lead at a point closer than 3 mm. to the body. 	<p>Voltage 200 to 1000 V</p> <p>Current 2.3 A at 55 °C</p>  <ul style="list-style-type: none"> • Glass Passivated Junction • High current capability • The plastic material carries U/L recognition 94 V-0 • Terminals: Axial Leads • Polarity: Color band denotes cathode
--	---

Maximum Ratings, according to IEC publication No. 134


		BYM26A	BYM26B	BYM26C	BYM26D	BYM26E
V_{RRM}	Peak Recurrent Reverse Voltage (V)	200	400	600	800	1000
V_{RMS}	Maximum RMS Voltage (V)	140	280	420	560	700
V_{DC}	Maximum DC Blocking Voltage (V)	200	400	600	800	1000
$I_{F(AV)}$	Forward Current at $T_{amb} = 55\text{ °C}$	2.3 A				
I_{FRM}	Recurrent Peak Forward Current	19 A				
I_{FSM}	10 ms. Peak Forward Surge Current	45 A				
t_{rr}	Max. Reverse Recovery Time From $I_F = 0.5\text{ A}$; $I_R = 1\text{ A}$; $I_{rr} = 0.25\text{ A}$	30 ns		75 ns		
V_{BR}	Avalanche breakdown voltage at 100 μA (V)	>300	>500	>700	>900	>1100
T_j	Operating Temperature Range	-65 to +175 °C				
T_{stg}	Storage Temperature Range	-65 to +175 °C				
E_{RSM}	Maximum non Repetitive Peak Reverse Avalanche Energy. $I_R = 1\text{ A}$; $T_j = 25\text{ °C}$	20 mJ				

Electrical Characteristics at $T_{amb} = 25\text{ °C}$


V_F	Max. Forward Voltage Drop at $I_F = 2\text{ A}$	at 25 °C 2.65 V	at 175 °C 1.34 V
I_R	Max. Reverse Current at V_{RRM}	at 25°C 5 μA	at 165 °C 150 μA
$R_{th(j-a)}$	Max. Thermal Resistance ($l = 10\text{ mm}$)	30 °C/W	

Rating And Characteristic Curves


FORWARD CURRENT DERATING CURVE

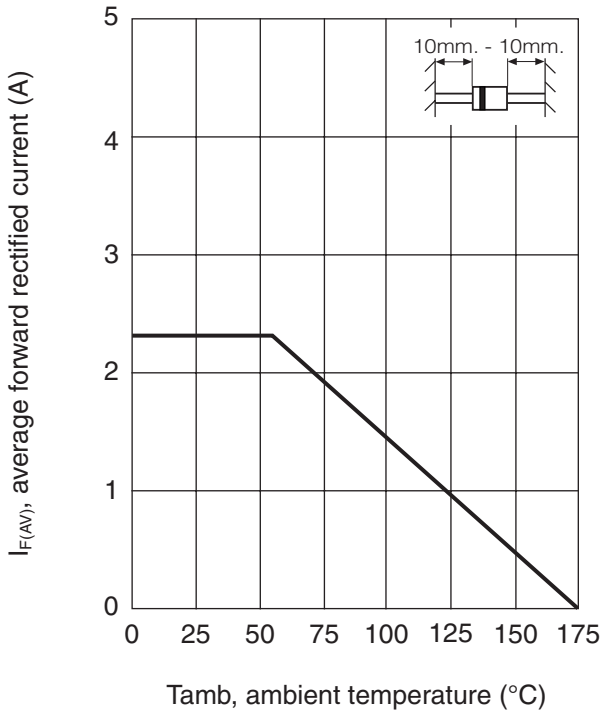

MAXIMUM FORWARD CHARACTERISTIC

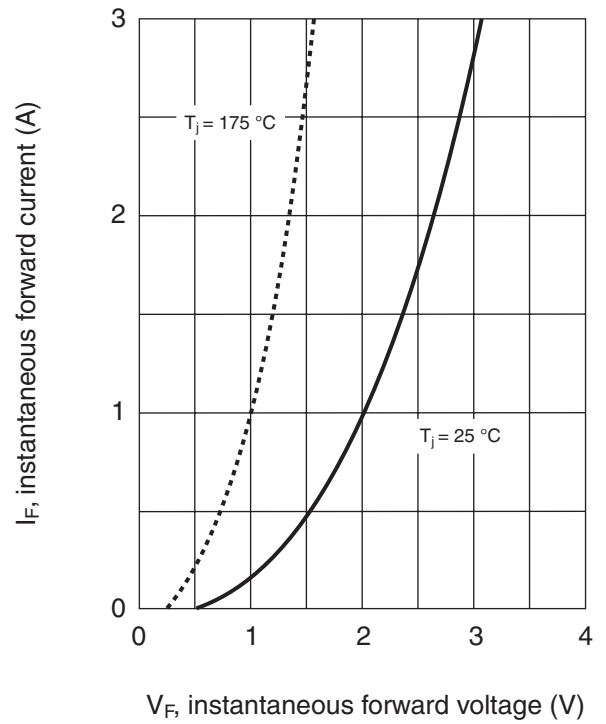

MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

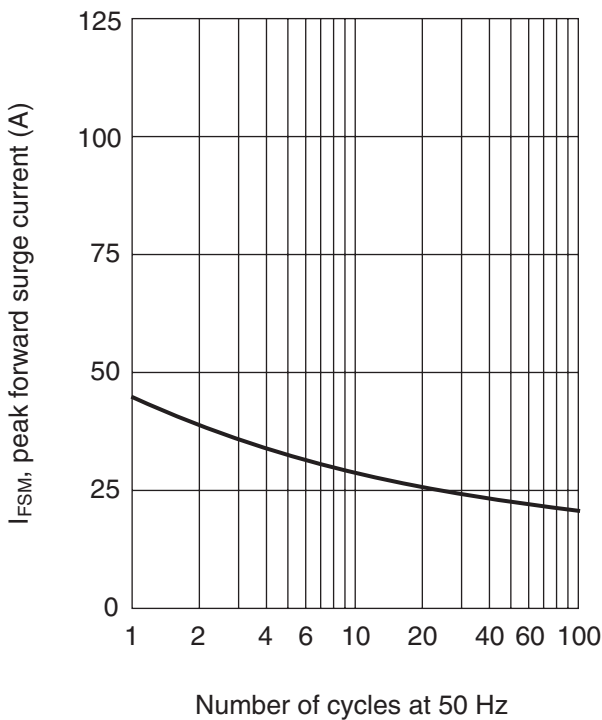

TYPICAL JUNCTION CAPACITANCE

