



SEMITRANS® 4

Trench IGBT Modules

SKM 800GA126D

Features

- Trench = Trenchgate technology
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_C$

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

Remarks

- $I_{DC} \leq 500A$ limited by terminals




GA

Absolute Maximum Ratings			T _c = 25 °C, unless otherwise specified	
Symbol	Conditions		Values	Units
IGBT				
V _{CES}	T _j = 25 °C		1200	V
I _C	T _j = 150 °C	T _{case} = 25 °C	960	A
		T _{case} = 80 °C	620	A
I _{CRM}	I _{CRM} =2xI _{Cnom}		1200	A
V _{GES}			± 20	V
t _{psc}	V _{CC} = 600 V; V _{GE} ≤ 20 V; T _j = 125 °C V _{CES} < 1200 V		10	μs
Inverse Diode				
I _F	T _j = 150 °C	T _{case} = 25 °C	680	A
		T _{case} = 125 °C	470	A
I _{FRM}	I _{FRM} =2xI _{Fnom}		1200	A
I _{FSM}	t _p = 10 ms; sin.	T _j = 150 °C	3600	A
Module				
I _{t(RMS)}			500	A
T _{vj}			- 40 ... + 150	°C
T _{stg}			- 40 ... + 125	°C
V _{isol}	AC, 1 min.		4000	V

Characteristics			T _c = 25 °C, unless otherwise specified			
Symbol	Conditions		min.	typ.	max.	Units
IGBT						
V _{GE(th)}	V _{GE} = V _{CE} , I _C = 16 mA		5	5,8	6,5	V
I _{CES}	V _{GE} = 0 V, V _{CE} = V _{CES} T _j = 25 °C T _j = 125 °C			0,2	0,6	mA mA
V _{CE0}	T _j = 25 °C T _j = 125 °C			1 0,9	1,15	V V
r _{CE}	V _{GE} = 15 V T _j = 25°C T _j = 125°C			1,2 1,8	1,7	mΩ mΩ
V _{CE(sat)}	I _{Cnom} = 600 A, V _{GE} = 15 V T _j = 25°C _{chiplev.} T _j = 125°C _{chiplev.}			1,7 2	2,15	V V
C _{ies}	V _{CE} = 25, V _{GE} = 0 V f = 1 MHz			42		nF
C _{oes}				3,3		nF
C _{res}				3,1		nF
Q _G	V _{GE} = -8V - +20V			5200		nC
R _{Gint}	T _j = °C			1,25		Ω
t _{d(on)}	R _{Gon} = 3 Ω	V _{CC} = 600V I _C = 600A		220		ns
t _r				100		ns
E _{on}				65		mJ
t _{d(off)}	R _{Goff} = 3 Ω	T _j = 125 °C V _{GE} = ± 15V		860		ns
t _f				135		ns
E _{off}				95		mJ
R _{th(j-c)}	per IGBT				0,042	K/W

SKM 800GA126D

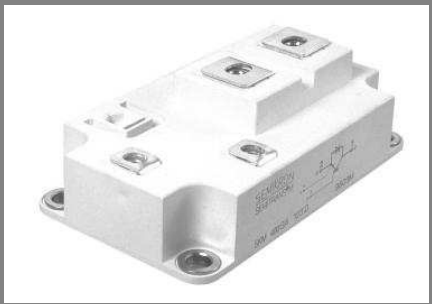

SEMITRANS® 4

Trench IGBT Modules

SKM 800GA126D

Features

- Trench = Trenchgate technology
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_C$

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

Remarks

- $I_{DC} \leq 500A$ limited by terminals

Characteristics						
Symbol	Conditions		min.	typ.	max.	Units
Inverse Diode						
V _F = V _{EC}	I _{Fnom} = 600 A; V _{GE} = 0 V	T _j = 25 °C _{chiplev.}	1,6	1,8	V	
		T _j = 125 °C _{chiplev.}	1,6	1,8	V	
V _{F0}		T _j = 25 °C	1	1,1	V	
		T _j = 125 °C	0,8	0,9	V	
r _F		T _j = 25 °C	1	1,2	mΩ	
		T _j = 125 °C	1,3	1,5	mΩ	
I _{RRM}	I _F = 600 A	T _j = 125 °C	540		A	
Q _{rr}	di/dt = 6000 A/μs		125		μC	
E _{rr}	V _{GE} = -15 V; V _{CC} = 600 V		59		mJ	
R _{th(j-c)D}	per diode			0,09	K/W	
Module						
L _{CE}			15	20	nH	
R _{CC'+EE'}	res., terminal-chip	T _{case} = 25 °C	0,18		mΩ	
		T _{case} = 125 °C	0,22		mΩ	
R _{th(c-s)}	per module			0,038	K/W	
M _s	to heat sink M6		3	5	Nm	
M _t	to terminals M6 (M4)		2,5 (1,1)	5 (2)	Nm	
w				330	g	

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.



GA

SKM 800GA126D



SEMITRANS® 4

Trench IGBT Modules

SKM 800GA126D

Features

- Trench = Trenchgate technology
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_C$

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders







Remarks







- $I_{DC} \leq 500A$ limited by terminals

Z_{th}			
Symbol	Conditions	Values	Units
$Z_{th(j-c)I}$			
R_i	$i = 1$	30	mk/W
R_i	$i = 2$	9,5	mk/W
R_i	$i = 3$	2,2	mk/W
R_i	$i = 4$	0,3	mk/W
τ_{u_i}	$i = 1$	0,1043	s
τ_{u_i}	$i = 2$	0,009	s
τ_{u_i}	$i = 3$	0,0015	s
τ_{u_i}	$i = 4$	0,004	s
$Z_{th(j-c)D}$			
R_i	$i = 1$	62	mk/W
R_i	$i = 2$	23	mk/W
R_i	$i = 3$	4,2	mk/W
R_i	$i = 4$	0,8	mk/W
τ_{u_i}	$i = 1$	0,0566	s
τ_{u_i}	$i = 2$	0,0166	s
τ_{u_i}	$i = 3$	0,0015	s
τ_{u_i}	$i = 4$	0,0002	s



GA

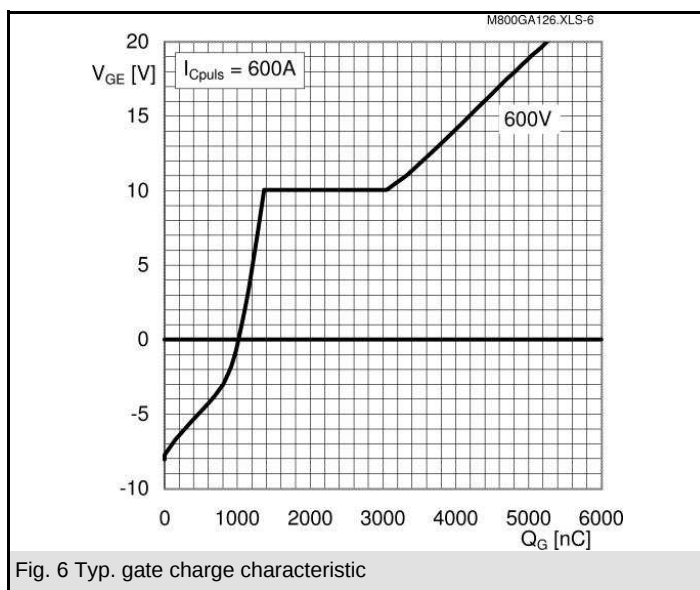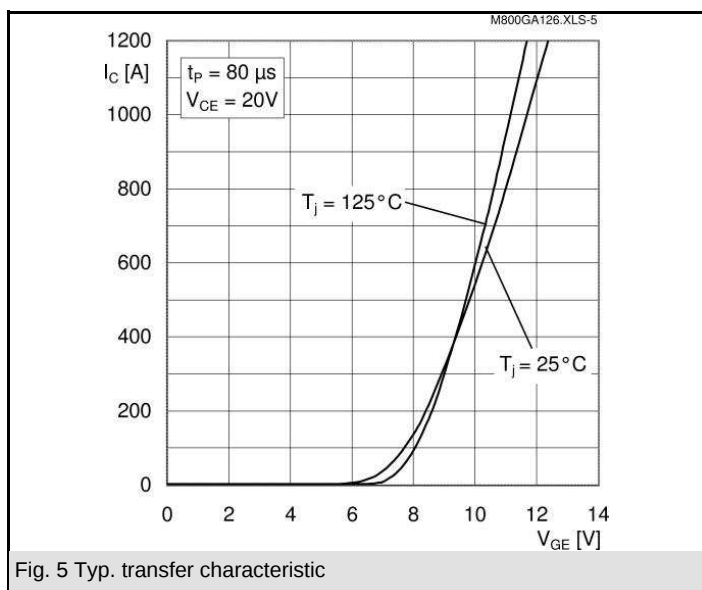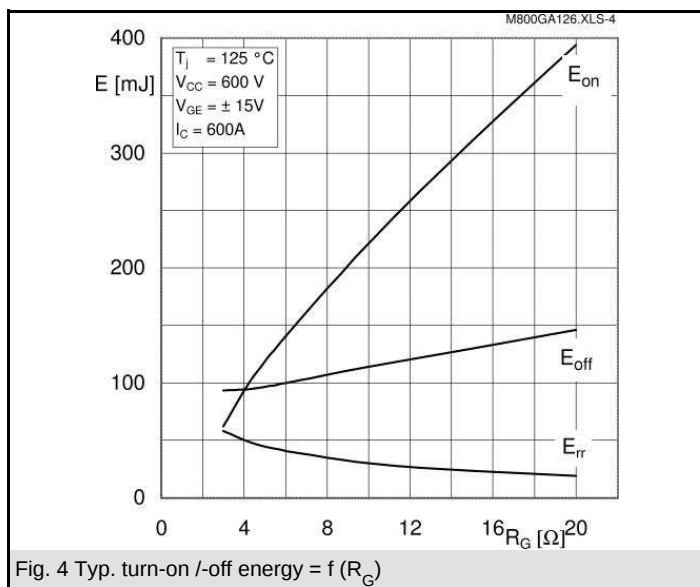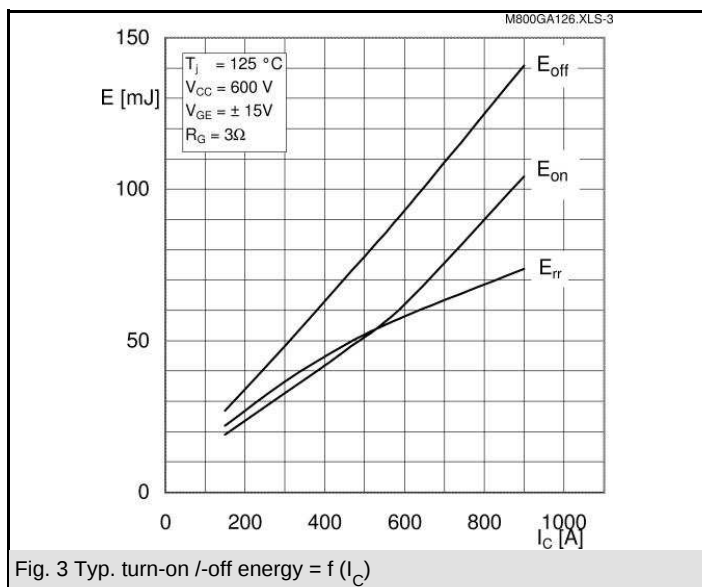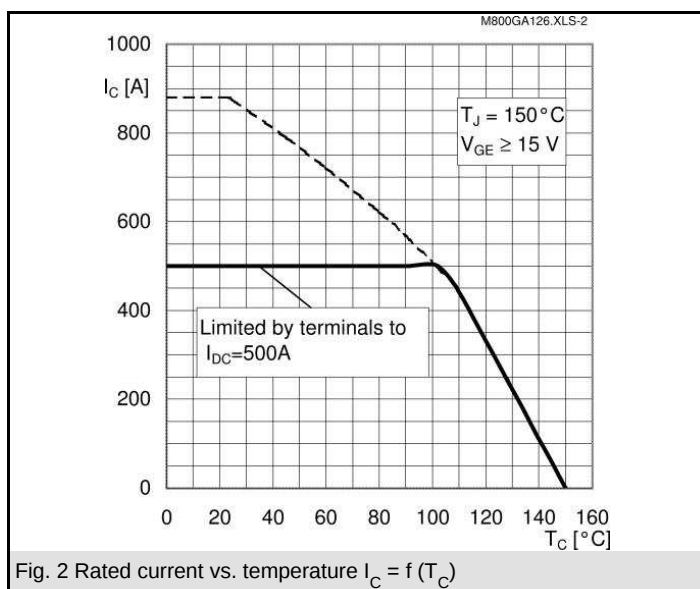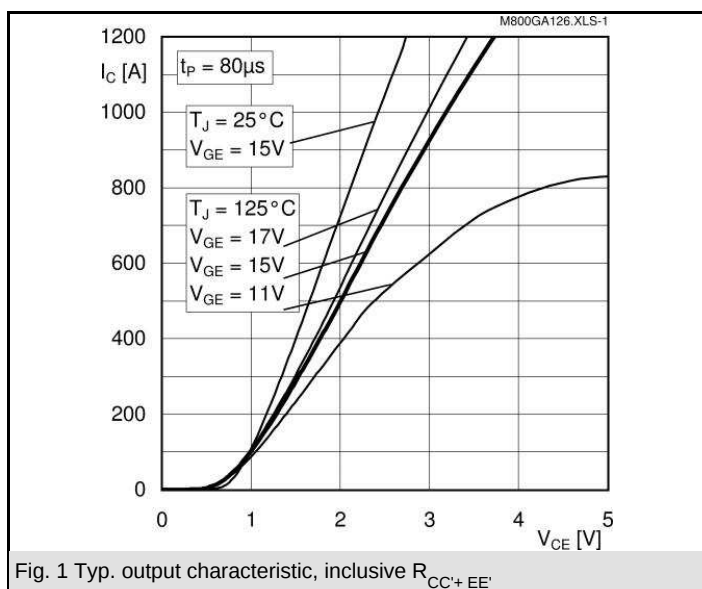

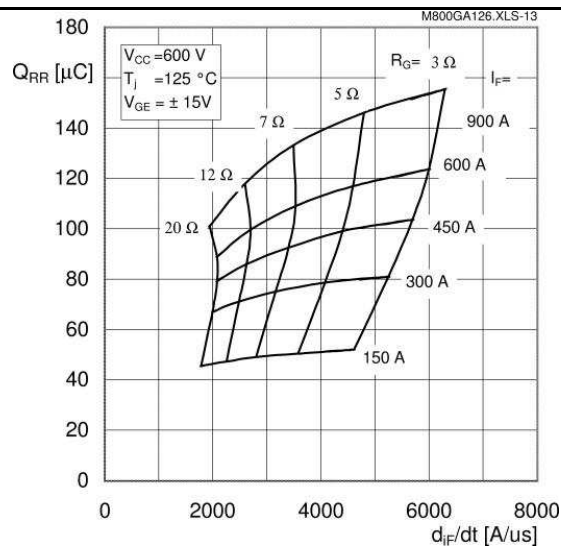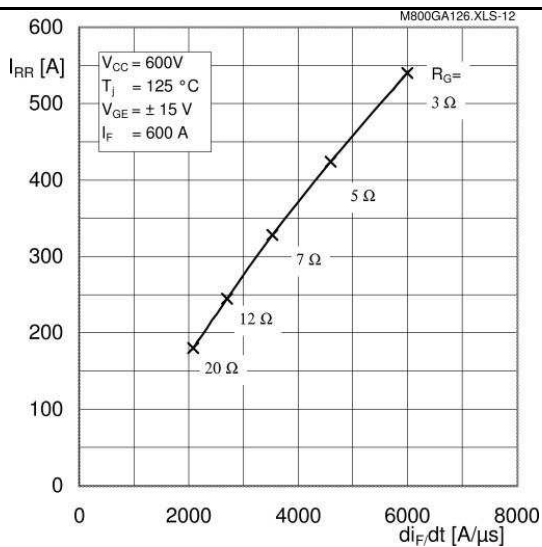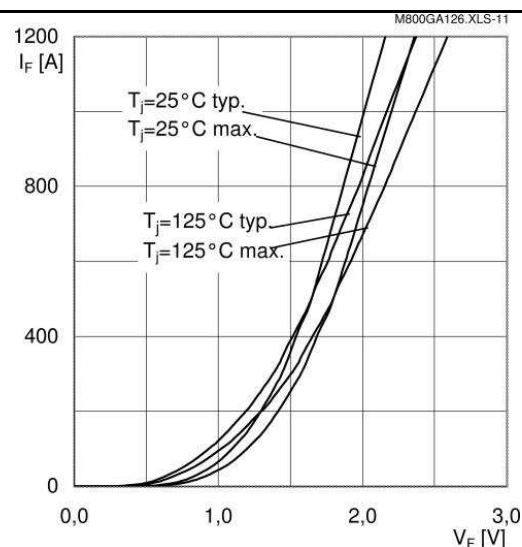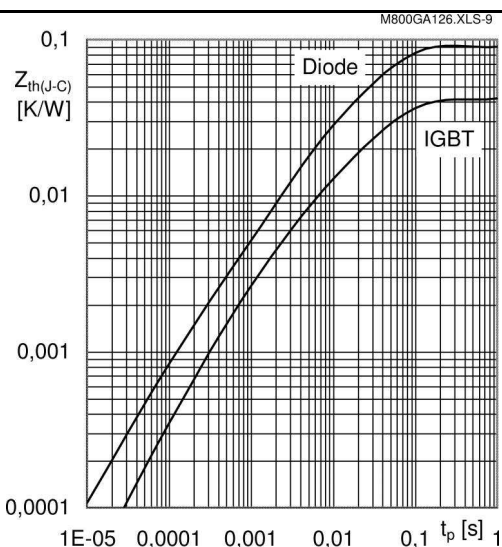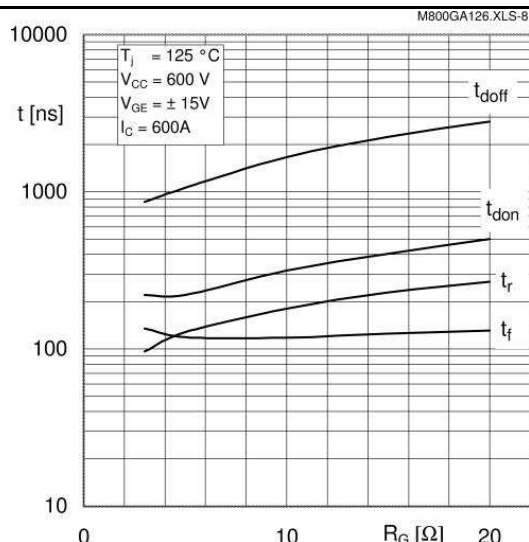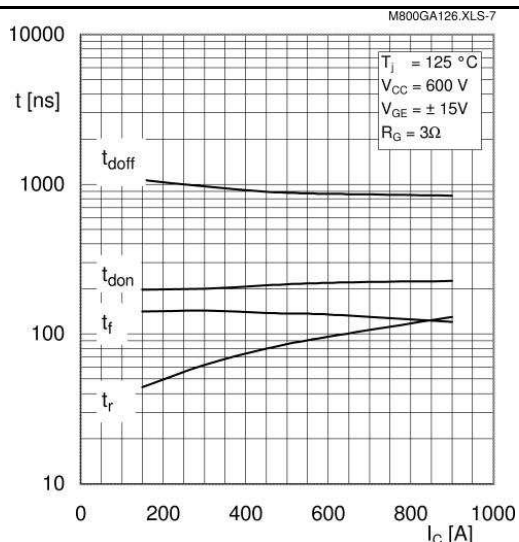


SKM 800GA126D


UL Recognized

CASED59

File 63 532

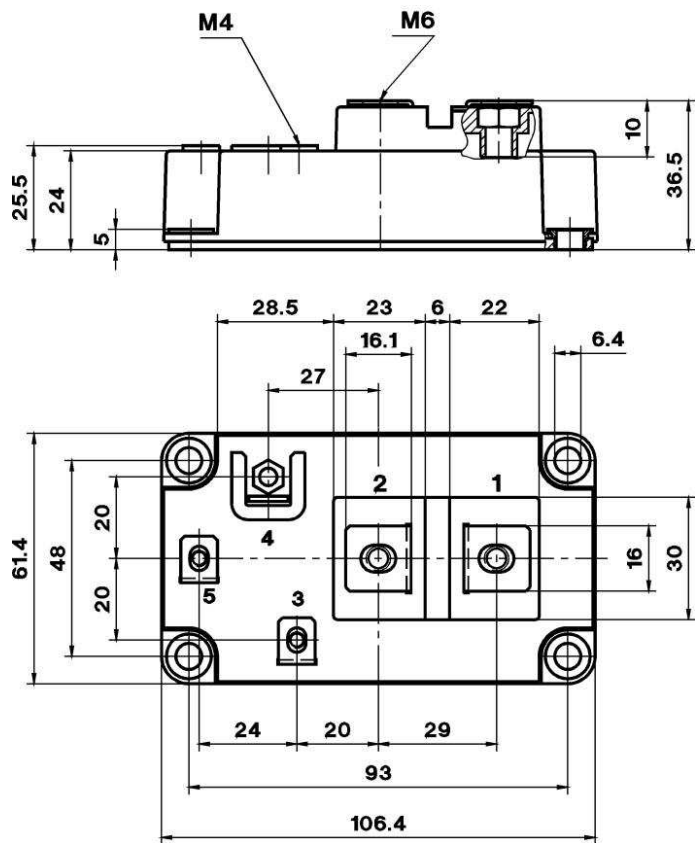

Case D 59

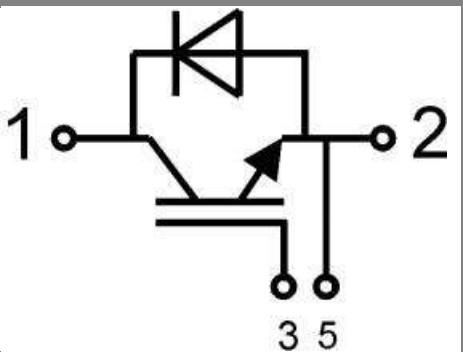

Case D59

GA