


SKS 88N B6HK 60 V16

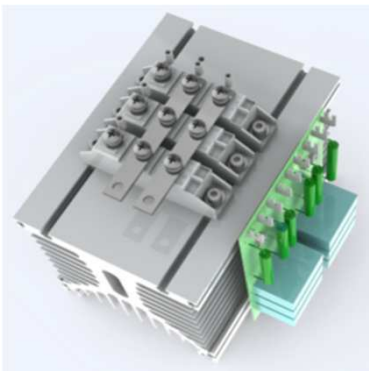

Thyristor/Diode Module stack

Electrical Characteristics						
Symbol	Conditions		min	typ	max	Unit
Electrical Data						
I _D	Maximum DC current	T _{AMBIENT} = 35°C ; No overload		88		A
V _{AC}	Maximum AC voltage (+/-10%)			500		V _{AC}
V _{BUS}	DC Bus voltage			670		V _{DC}
P _{TOTAL}	Maximum stack power			60		kW
P _{LOSS}	Stack power loss (T _{AMBIENT} = 35°C)					W

Environmental Data					
Symbol	Conditions	min	typ	max	Unit
Mechanical Data					
Drawing	SEMIKRON document number.revision.version	12100922.00.B			-
Weight	Approximate total weight	4.4			kg
Altitude	Installation altitude without derating	1 000			m
Protection	IEC 60529	IP00			-
Pollution degree	EN 50178	2			-

Stack Protection					
Symbol	Conditions	min	typ	max	Unit
RC Circuit					
Type	RC in parallel with each electrical switch	RC32			-
R	Resistance (11W)	100			Ohm
C		0.1			µF

SEMISTACK® CLASSICS - B6HK

Three phase half-controlled rectifier

Preliminary Data

Ordering No. 08800519
Description SKS 88N B6HK 60 V16

Features


- Isolated power stacks
- SKKH 106/16
- Heatsink P3/180
- Natural cooling
- RC circuit included

Typical Applications


- Soft charge
- Industrial heating

Remarks

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee, expressed or implied, is made regarding delivery, performance or suitability.

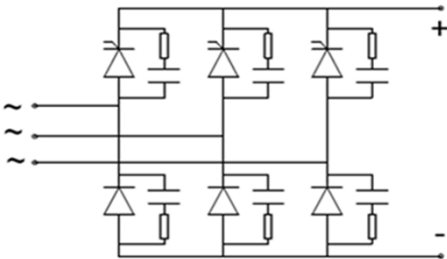

B6HK

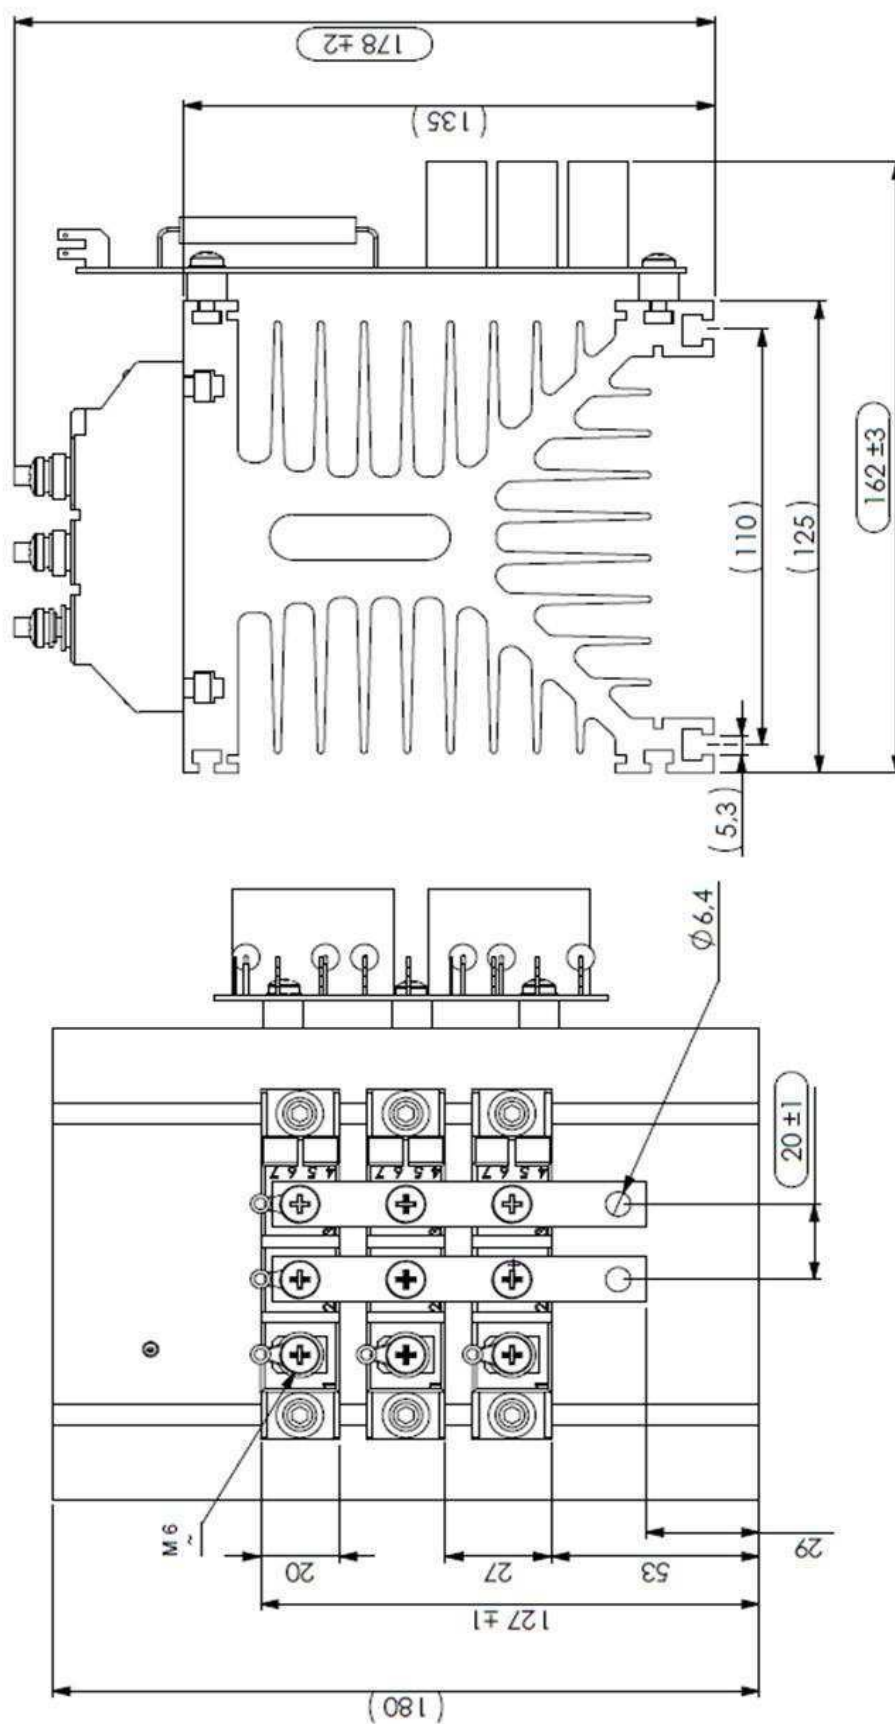

Dimensions

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.