


SKS 850F B6U 570 V16

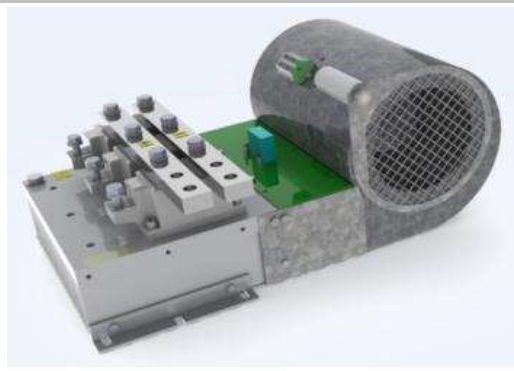

Diode Module stack

SEMISTACK® CLASSICS - B6U

Three phase uncontrolled rectifier

Preliminary Data

Ordering No. 08785118
Description SKS 850F B6U 570 V16

Features

- Isolated power stacks
- SKKD 380/16
- Heatsink P16/200
- Forced air cooling
- RC circuit included
- Thermal trip included

Typical Applications

- Power supplies
- Rectifier for AC/DC motor control

Remarks

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee, expressed or implied, is made regarding delivery, performance or suitability.


Electrical Characteristics						
Symbol	Conditions		min	typ	max	Unit
Electrical Data						
I _D	Maximum DC current	T _{AMBIENT} = 35°C ; No overload		850		A
V _{AC}	Maximum AC voltage (+/-10%)			500		V _{AC}
V _{BUS}	DC Bus voltage			670		V _{DC}
P _{TOTAL}	Maximum stack power			570		kW
P _{LOSS}	Stack power loss (T _{AMBIENT} = 35°C)					W

Environmental Data					
Symbol	Conditions	min	typ	max	Unit
Mechanical Data					
Drawing	SEMIKRON document number.revision.version	12101202.00			-
Weight	Approximate total weight	14.1			kg
Altitude	Installation altitude without derating	1 000			m
Protection	IEC 60529	IP00			-
Pollution degree	EN 50178	2			-


Fan Data					
Type	SEMIKRON fan designation			SKF 16A-230-11	-
V _{FAN}	Fan voltage			230	V _{AC}
f _{FAN}	Fan frequency			50/60	Hz
I _{FAN}	Fan maximum input current			0.60/0.68	A
P _{FAN}	Fan power			135/154	W

Stack Protection					
Symbol	Conditions	min	typ	max	Unit
RC Circuit					
Type	RC in parallel with bridge rectifier	1/6 RC47			-
R	Resistance (11W)	47			Ohm
C		0.22			μF

Bimetal Thermal Trip					
T _S	Switching temperature over which thermal trip is open			95	°C
I _{TC MAX}	Maximum permissible current			1	A
	at 240VAC at 30Vdc			3	A

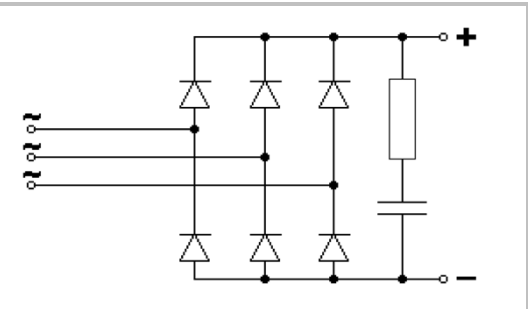

B6U

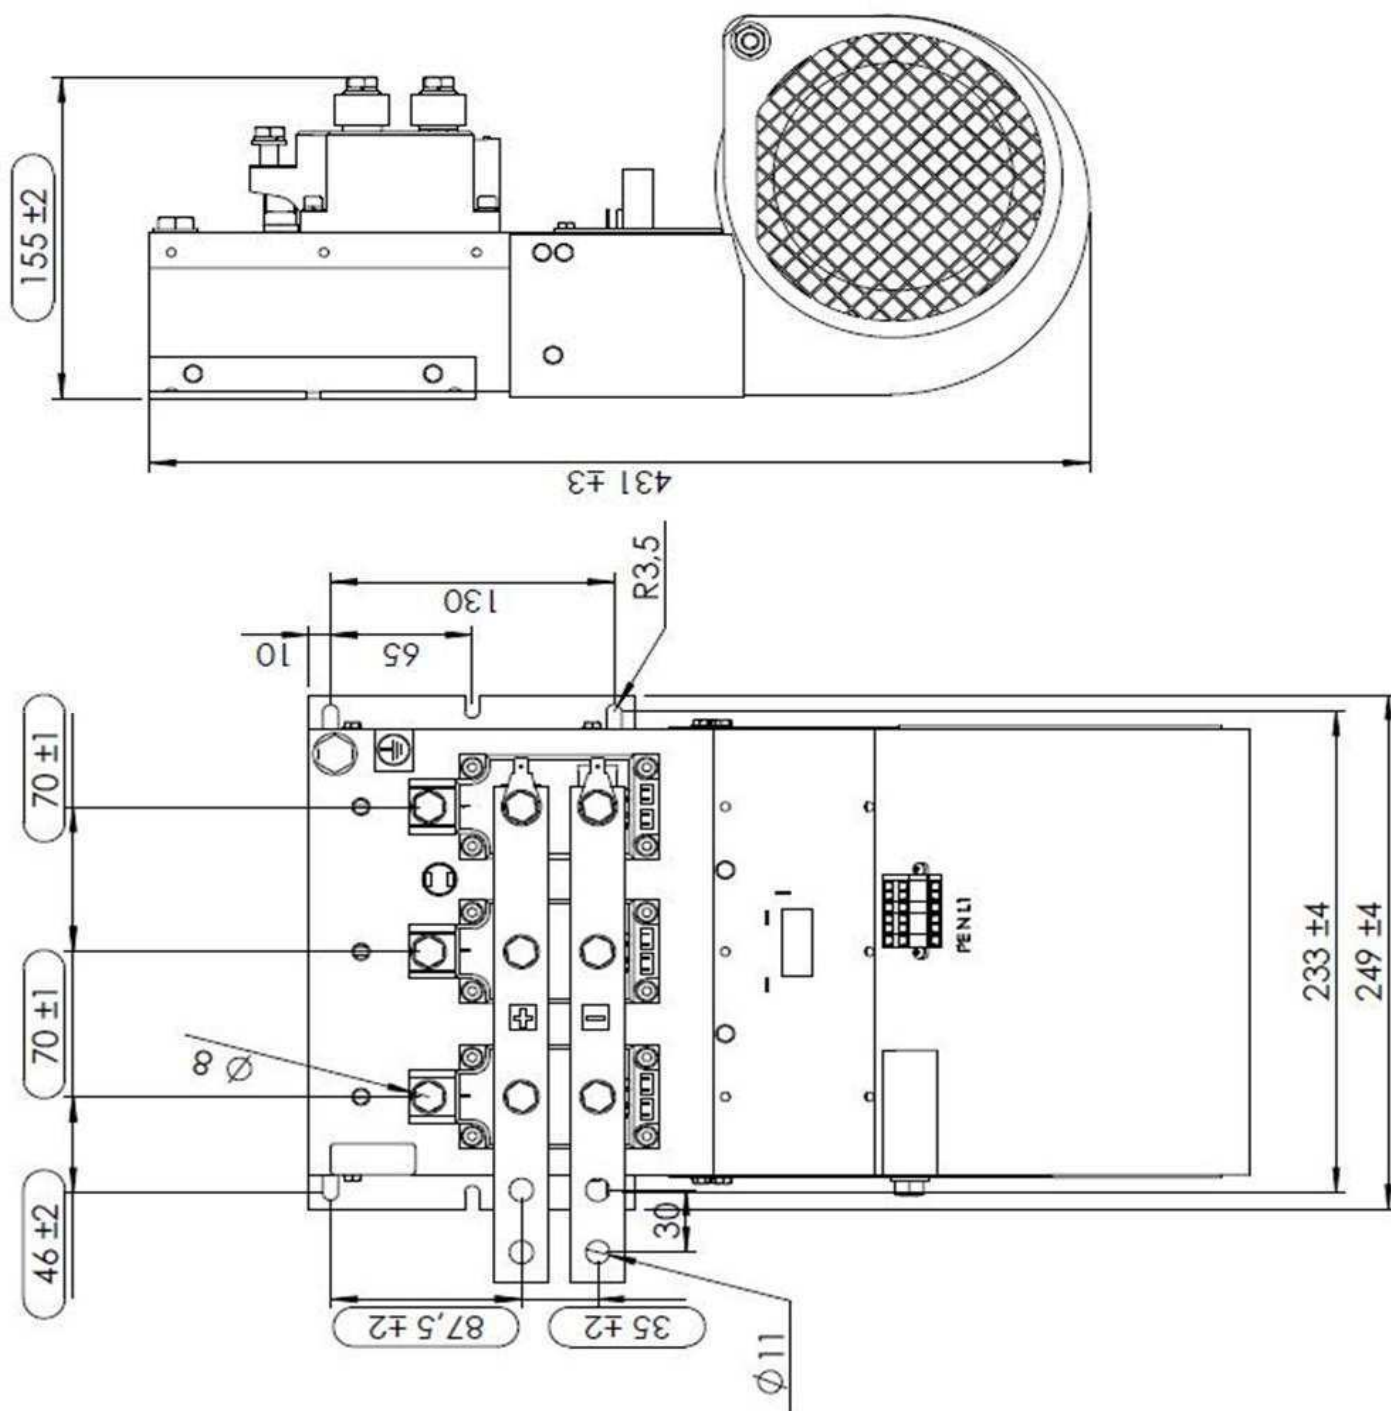

Dimensions

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.