



Thyristor/Diode Presspack stack

SEMISTACK® CLASSICS - B6HK

Three phase half-controlled rectifier

Preliminary Data

Ordering No. 08800493
Description SKS 1200F B6HK 800 V16

Features

- Non-isolated power stacks
- SKN 1500/16 / SKT 760/16
- Heatsink P17/130
- Forced air cooling
- RC circuit included
- Thermal trip included

Typical Applications

- Soft charge
- Industrial heating

Remarks

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee, expressed or implied, is made regarding delivery, performance or suitability.


Electrical Characteristics							
Symbol	Conditions			min	typ	max	Unit
Electrical Data							
I _D	Maximum DC current	T _{AMBIENT} = 35°C ; No overload		1 200		A	
V _{AC}	Maximum AC voltage (+/-10%)			500		V _{AC}	
V _{BUS}	DC Bus voltage			670		V _{DC}	
P _{TOTAL}	Maximum stack power			805		kW	
P _{LOSS}	Stack power loss (T _{AMBIENT} = 35°C)					W	

Environmental Data							
Symbol	Conditions			min	typ	max	Unit
Mechanical Data							
Drawing	SEMIKRON document number.revision.version			12100412.00.A		-	
Weight	Approximate total weight			43.3		kg	
Altitude	Installation altitude without derating					1 000	m
Protection	IEC 60529			IP00		-	
Pollution degree	EN 50178			2		-	


Fan Data			
Type	SEMIKRON fan designation	SKF 17A-230-11	-
V _{FAN}	Fan voltage	230	V _{AC}
f _{FAN}	Fan frequency	50/60	Hz
I _{FAN}	Fan maximum input current	0.36/0.51	A
P _{FAN}	Fan power	81/115	W

Stack Protection						
Symbol	Conditions		min	typ	max	Unit
RC Circuit						
Type	RC in parallel with each electrical switch		-		-	
R	Resistance (80W)		33		Ohm	
C			0.47		μF	

Bimetal Thermal Trip			
T _S	Switching temperature over which thermal trip is open	95	°C
I _{TC MAX}	Maximum permissible current at 240VAC	1	A
	at 30Vdc	3	A

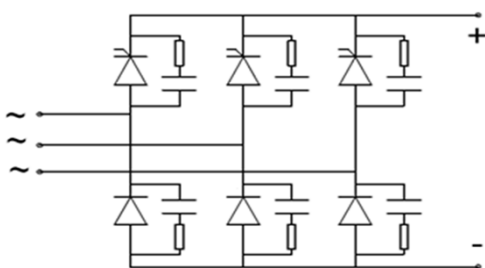

B6HK

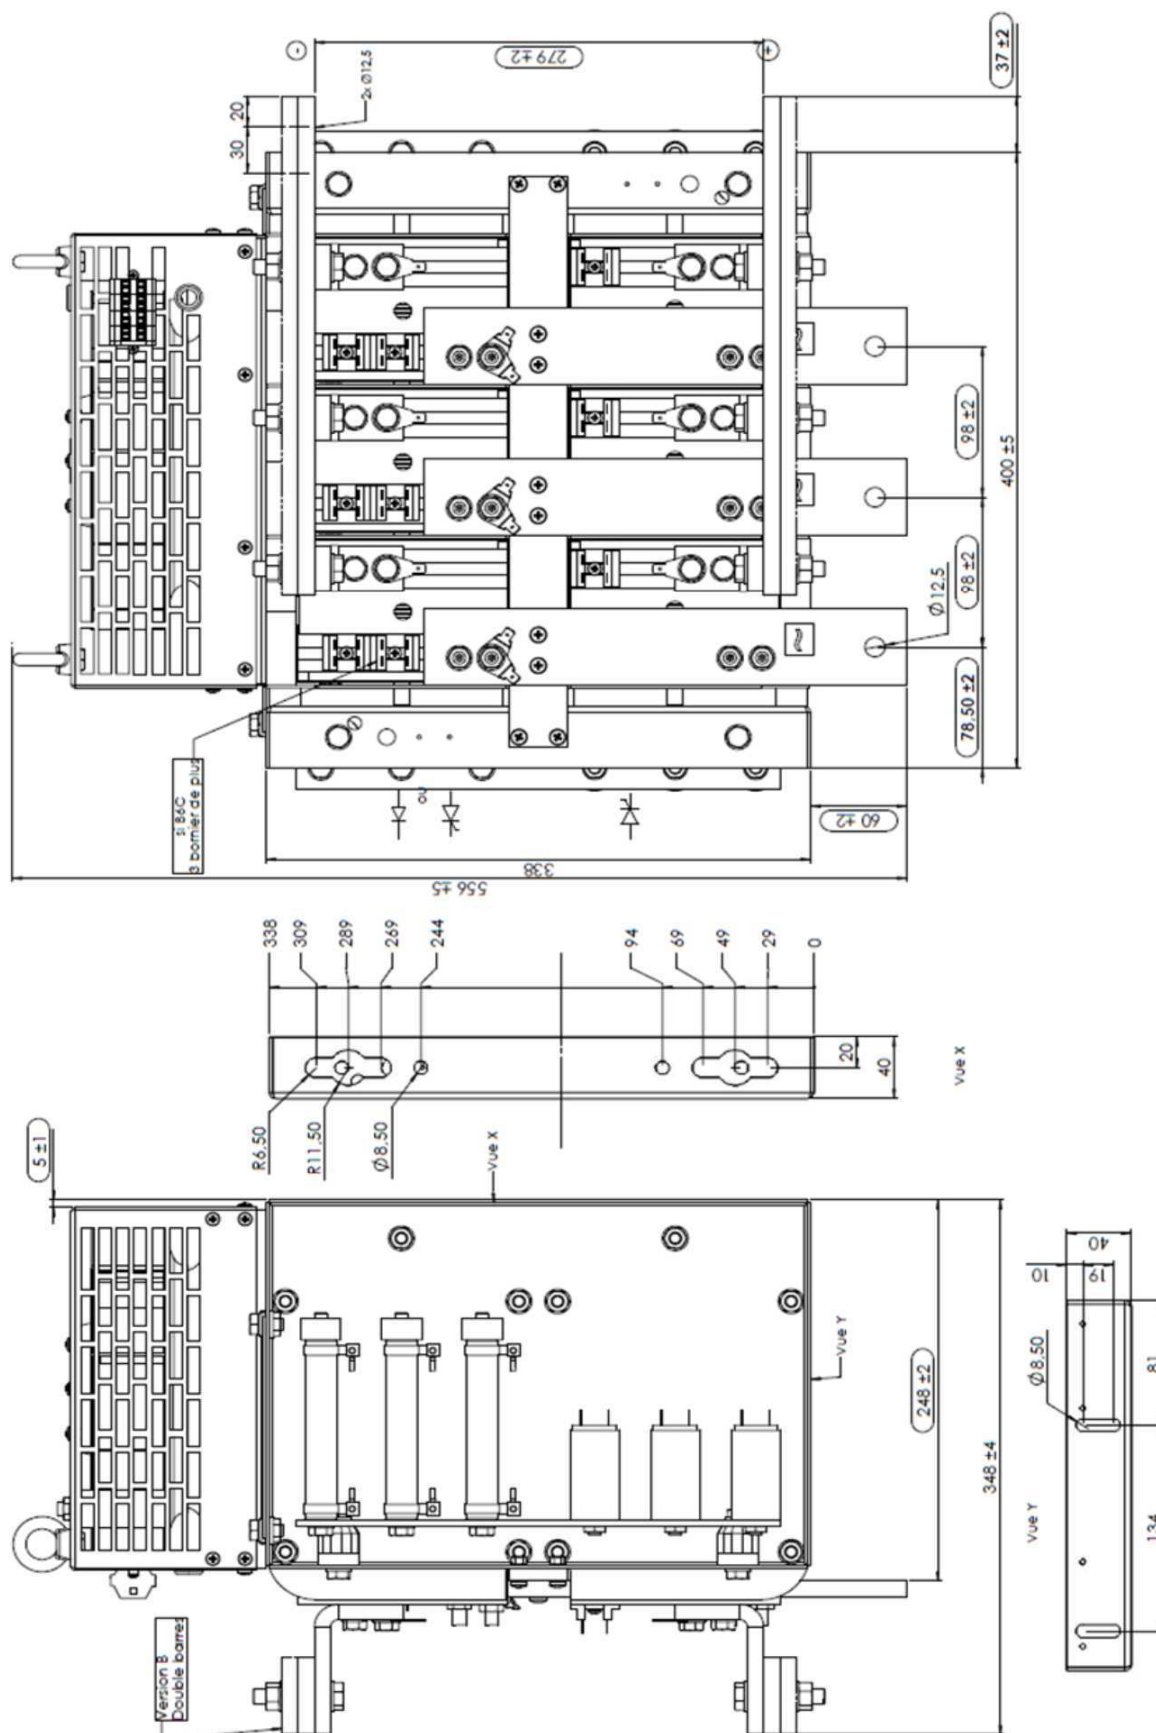

Dimensions

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.