

Diode Presspack stack

SEMISTACK® CLASSICS - B6U

Three phase uncontrolled rectifier

Preliminary Data

Ordering No. 08785109

Description SKS 1630N B6U 1090 V16 ZU

Features


- Non-isolated power stacks
- SKN 1500/16
- Heatsink U3/515
- Natural cooling
- RC circuit included
- Fuses with microswitches

Typical Applications

- Power supplies
- Rectifier for AC/DC motor control

Remarks

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee, expressed or implied, is made regarding delivery, performance or suitability.

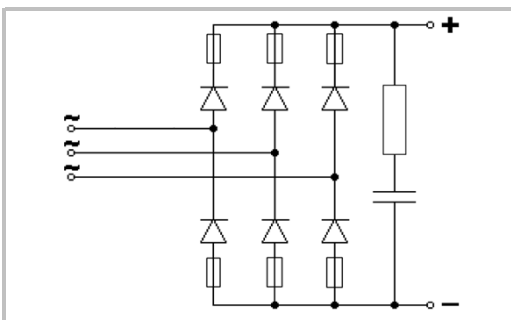

B6U

Electrical Characteristics

Symbol	Conditions		min	typ	max	Unit
Electrical Data						
I_D	Maximum DC current	$T_{AMBIENT} = 35^\circ\text{C}$; No overload		1 630		A
V_{AC}	Maximum AC voltage (+/-10%)			500		V_{AC}
V_{BUS}	DC Bus voltage			670		V_{DC}
P_{TOTAL}	Maximum stack power			1 090		kW
P_{LOSS}	Stack power loss ($T_{AMBIENT} = 35^\circ\text{C}$)					W

Environmental Data





Symbol	Conditions		min	typ	max	Unit
Mechanical Data						
Drawing	SEMIKRON document number.revision.version			12092602.00		-
Weight	Approximate total weight			118.2		kg
Altitude	Installation altitude without derating				1 000	m
Protection	IEC 60529			IP00		-
Pollution degree	EN 50178			2		-

Stack Protection

Symbol	Conditions		min	typ	max	Unit
RC Circuit						
Type	RC in parallel with bridge rectifier			-		-
R	Resistance (80W)			33		Ohm
C				0.47		μF

Fuses

Size	1 fuse per switch, with microswitches		33		-
$I_{N\text{RMS}}$	Caliber		1 250		A
U_N	Nominal voltage (IEC)		690		V
I^2t	Total at U_N at room temperature (approx. 20...25°C)			1 942.5	kA^2s

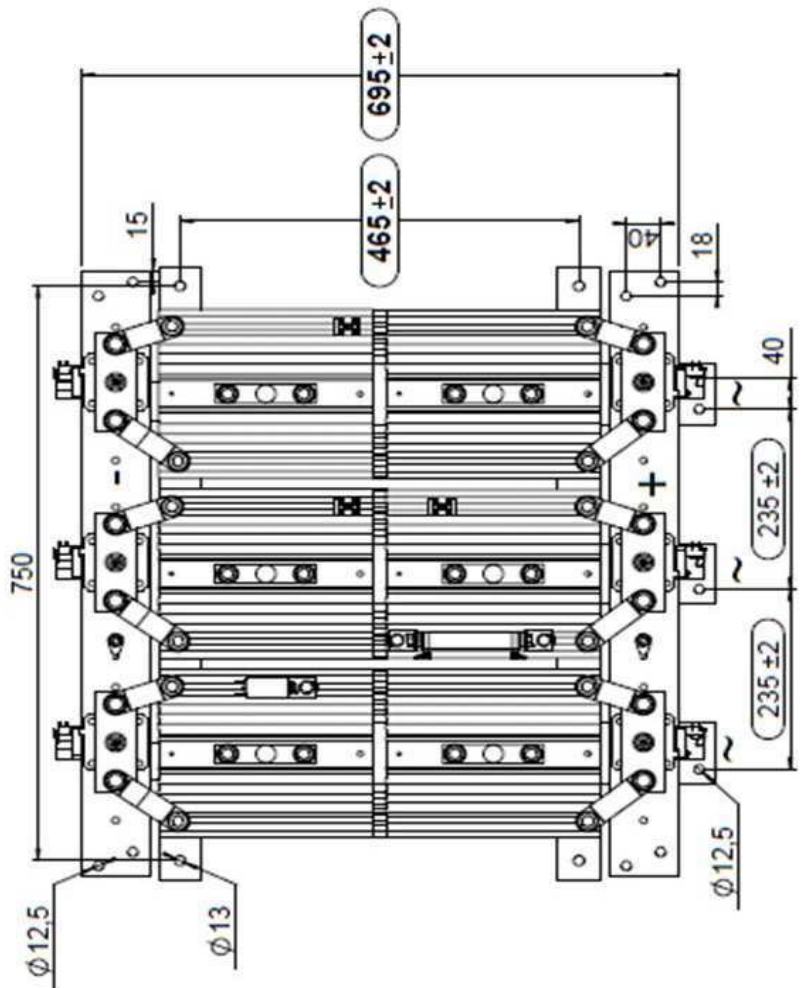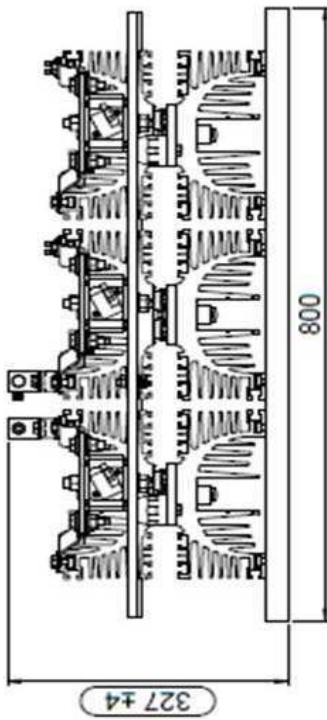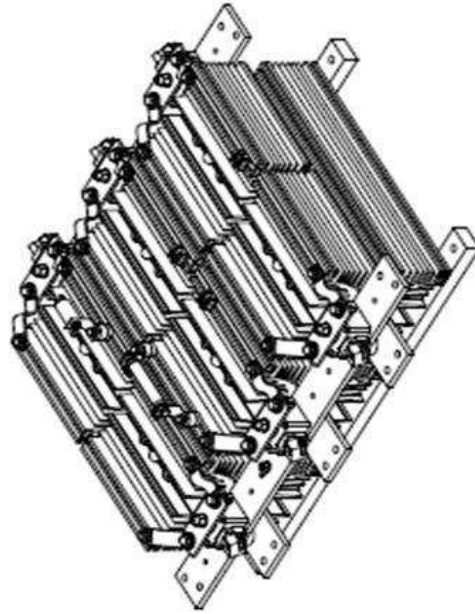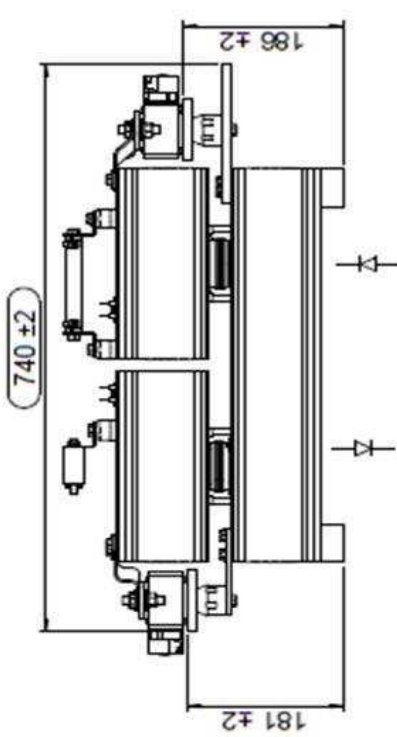

Dimensions

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.