

Thyristor Presspack stack

Electrical Characteristics						
Symbol	Conditions		min	typ	max	Unit
Electrical Data						
$I_D$	Maximum DC current	$T_{AMBIENT} = 35^{\circ}C$ ; No overload		1 890		A
$V_{AC}$	Maximum AC voltage (+/-10%)			500		$V_{AC}$
$V_{BUS}$	DC Bus voltage			670		$V_{DC}$
$P_{TOTAL}$	Maximum stack power			1 265		kW
$P_{LOSS}$	Stack power loss ( $T_{AMBIENT} = 35^{\circ}C$ )					W

Environmental Data						
Symbol	Conditions		min	typ	max	Unit
Mechanical Data						
Drawing	SEMIKRON document number.revision.version			93040101.03.A		-
Weight	Approximate total weight			73.3		kg
Altitude	Installation altitude without derating				1 000	m
Protection	IEC 60529			IP00		-
Pollution Degree	EN 50178			2		-

Fan Data						
Type	SEMIKRON fan designation		min	typ	max	Unit
Type	SEMIKRON fan designation			SKF N4-230-01		-
$V_{FAN}$	Fan voltage			230		$V_{AC}$
$f_{FAN}$	Fan frequency			50/60		Hz
$I_{FAN}$	Fan maximum input current			0.69/0.98		A
$P_{FAN}$	Fan power			155/230		W

Stack Protection						
Symbol	Conditions		min	typ	max	Unit
RC Circuit						
Type	RC in parallel with each electrical switch			-		-
R	Resistance (80W)			33		Ohm
C				0.47		$\mu F$

Bimetal Thermal Trip						
Symbol	Conditions		min	typ	max	Unit
$T_S$	Switching temperature over which thermal trip is open			95		$^{\circ}C$
$I_{TC MAX}$	Maximum permissible current			1		A
	at 30Vdc			3		A

## SEMISTACK® CLASSICS - B6C

Three phase controlled rectifier

### Preliminary Data

Ordering No. 08785002  
Description SKS 1890F B6C 1270 V16

### Features


- Non-isolated power stacks
- SKT 1200/16
- Heatsink P18/180
- Forced air cooling
- RC circuit included
- Thermal trip included

### Typical Applications


- Regulated power supplies
- Alternator excitation
- Motor control

### Remarks

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee, expressed or implied, is made regarding delivery, performance or suitability.

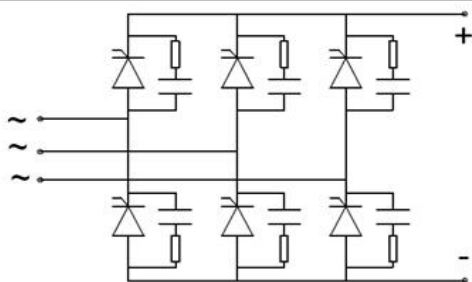

B6C

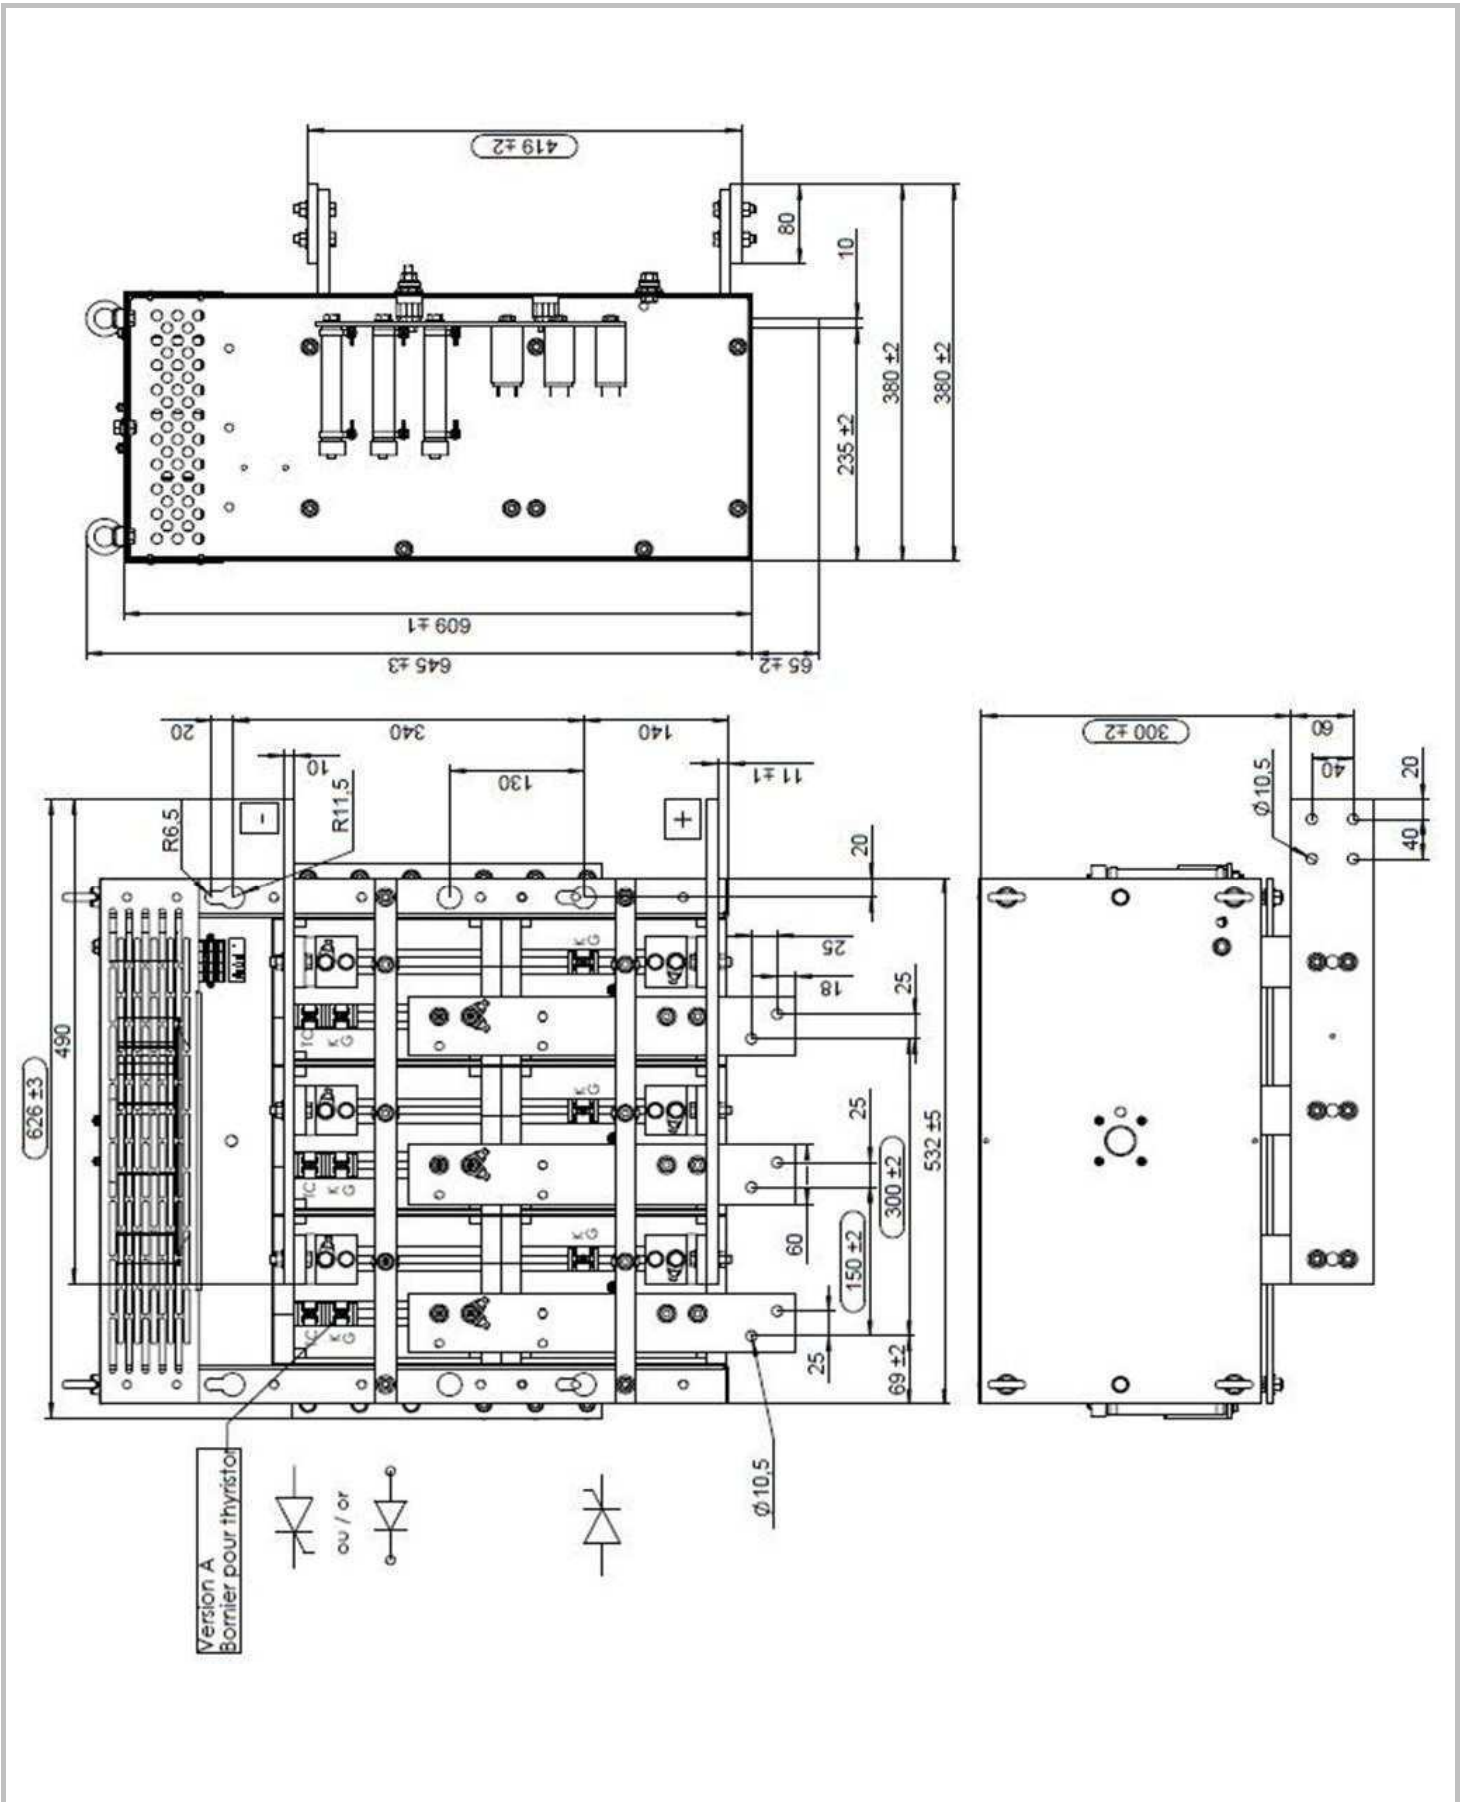

Dimensions

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.