

Thin Film Chip Inductors

Features


- Photolithographic single layer ceramic chip
- High SRF, superior Q, and excellent temperature stability
- Precision within $\pm 1\%$ or ± 0.1 nH

Applications

- Cellular telephone, digital camera and GPS products
- VCO, TCXO Circuits and RF transceiver modules
- Wireless LANs, bluetooth modules, communication appliances

Recommended PC Board Land Patterns

CHIP SIZE EIA/EIAJ	L INCH (mm)	G INCH (mm)	H INCH (mm)
0201(0502)	0.033 (0.85)	0.010 (0.25)	0.016 (0.40)
0402(1005)	0.063 (1.60)	0.016 (0.40)	0.024 (0.60)
0603(1608)	0.102 (2.60)	0.022 (0.55)	0.037 (0.94)

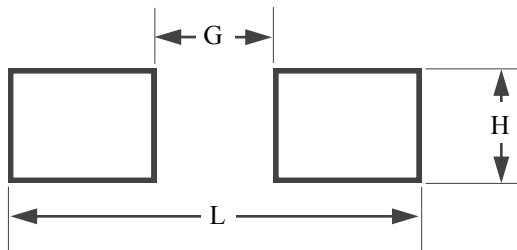

Operating Temperature


-40°C — +85°C

Product Identification

TFI 0402 C 1N8 S T - T
(1) (2) (3) (4) (5) (6) (7)

- (1) Series code :
TFI: Thin Film Inductor
- (2) Dimensions: L x W inches
The first two digits: L (length)
The last two digits: W (width)
- (3) Characteristic code: C
- (4) Value code: Inductance
N — decimal point for nH
Example: 1N8 = 1.8 nH
R — decimal point for μ H (1000 nH)
Example: R10 = 0.10 μ H = 100 nH
- (5) Tolerance code:
F = $\pm 1\%$ B = ± 0.1 nH
G = $\pm 2\%$ C = ± 0.2 nH
H = $\pm 3\%$ S = ± 0.3 nH
J = $\pm 5\%$
- (6) Package code:
T = Tape & Reel
- (7) Termination type code:
T = 100% Sn plating

Shape and Dimensions

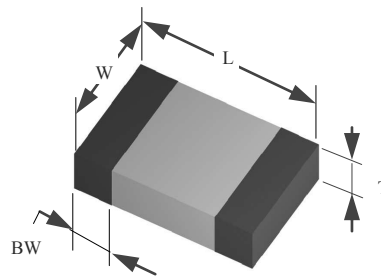

SIZE EIA/EIAJ	LENGTH (L) INCH (mm)	WIDTH (W) INCH (mm)	THICKNESS (T) INCH (mm)	TERMINATION (BW) INCH (mm)
0201/0502	0.024 $\pm$ 0.002 (0.60 $\pm$ 0.05)	0.012 $\pm$ 0.002 (0.30 $\pm$ 0.05)	0.009 $\pm$ 0.002 (0.23 $\pm$ 0.05)	0.006 $\pm$ 0.002 (0.15 $\pm$ 0.05)
0402/1005	0.039 $\pm$ 0.004 (1.00 $\pm$ 0.10)	0.020 $\pm$ 0.004 (0.50 $\pm$ 0.10)	0.013 $\pm$ 0.004 (0.32 $\pm$ 0.10)	0.008 $\pm$ 0.004 (0.20 $\pm$ 0.10)
0603/1608	0.063 $\pm$ 0.006 (1.60 $\pm$ 0.15)	0.031 $\pm$ 0.006 (0.80 $\pm$ 0.15)	0.018 $\pm$ 0.004 (0.45 $\pm$ 0.10)	0.012 $\pm$ 0.008 (0.30 $\pm$ 0.20)

TFI Series

<i>AEM Part Number</i>	<i>L, nH</i>	<i>Tolerance</i>	<i>Min. Q</i>	<i>Test Frequency MHz</i>	<i>Min. SRF GHz</i>	<i>Max. R_{DC} Ω</i>	<i>Max. I A</i>
TFI0201C0N1	0.1	B, C, S	8	500	9	0.20	0.40
TFI0201C0N2	0.2	B, C, S	8	500	9	0.20	0.40
TFI0201C0N3	0.3	B, C, S	8	500	9	0.20	0.40
TFI0201C0N4	0.4	B, C, S	8	500	9	0.25	0.35
TFI0201C0N5	0.5	B, C, S	8	500	9	0.25	0.35
TFI0201C0N6	0.6	B, C, S	8	500	9	0.25	0.35
TFI0201C0N7	0.7	B, C, S	8	500	9	0.30	0.30
TFI0201C0N8	0.8	B, C, S	8	500	9	0.30	0.30
TFI0201C0N9	0.9	B, C, S	8	500	9	0.30	0.30
TFI0201C1N0	1.0	B, C, S	8	500	9	0.30	0.30
TFI0201C1N1	1.1	B, C, S	8	500	9	0.35	0.30
TFI0201C1N2	1.2	B, C, S	8	500	9	0.35	0.30
TFI0201C1N3	1.3	B, C, S	8	500	9	0.45	0.25
TFI0201C1N4	1.4	B, C, S	8	500	9	0.45	0.25
TFI0201C1N5	1.5	B, C, S	8	500	9	0.45	0.25
TFI0201C1N6	1.6	B, C, S	8	500	9	0.55	0.20
TFI0201C1N7	1.7	B, C, S	8	500	9	0.55	0.20
TFI0201C1N8	1.8	B, C, S	8	500	9	0.55	0.20
TFI0201C1N9	1.9	B, C, S	8	500	9	0.55	0.20
TFI0201C2N0	2.0	B, C, S	8	500	8	0.70	0.20
TFI0201C2N1	2.1	B, C, S	8	500	8	0.70	0.20
TFI0201C2N2	2.2	B, C, S	8	500	8	0.70	0.20
TFI0201C2N3	2.3	B, C, S	8	500	8	0.80	0.15
TFI0201C2N4	2.4	B, C, S	8	500	8	0.80	0.15
TFI0201C2N5	2.5	B, C, S	8	500	8	0.80	0.15
TFI0201C2N6	2.6	B, C, S	8	500	8	0.80	0.15
TFI0201C2N7	2.7	B, C, S	8	500	8	0.80	0.15
TFI0201C2N8	2.8	B, C, S	8	500	6	1.00	0.15
TFI0201C2N9	2.9	B, C, S	8	500	6	1.00	0.15
TFI0201C3N0	3.0	B, C, S	8	500	6	1.00	0.15
TFI0201C3N1	3.1	B, C, S	8	500	6	1.00	0.15
TFI0201C3N2	3.2	B, C, S	8	500	6	1.00	0.15
TFI0201C3N3	3.3	B, C, S	8	500	6	1.00	0.15
TFI0201C3N4	3.4	B, C, S	8	500	6	1.20	0.15

Other values may be available upon request.

TFI Series

<i>AEM Part Number</i>	<i>L, nH</i>	<i>Tolerance</i>	<i>Min. Q</i>	<i>Test Frequency MHz</i>	<i>Min. SRF GHz</i>	<i>Max. R_{DC} Ω</i>	<i>Max. I A</i>
TFI0201C3N5	3.5	B, C, S	8	500	6	1.20	0.15
TFI0201C3N6	3.6	B, C, S	8	500	6	1.20	0.15
TFI0201C3N7	3.7	B, C, S	8	500	6	1.20	0.15
TFI0201C3N8	3.8	B, C, S	8	500	6	1.20	0.15
TFI0201C3N9	3.9	B, C, S	8	500	6	1.20	0.15
TFI0201C4N0	4.0	B, C, S	8	500	6	1.20	0.15
TFI0201C4N4	4.4	B, C, S	8	500	6	1.30	0.15
TFI0201C4N7	4.7	B, C, S	8	500	6	1.40	0.13
TFI0201C4N9	4.9	B, C, S	8	500	6	1.60	0.13
TFI0201C5N6	5.6	G, J	8	500	4	1.80	0.13
TFI0201C6N1	6.1	G, J	8	500	4	2.00	0.12
TFI0201C6N8	6.8	G, J	8	500	4	2.30	0.11
TFI0201C7N4	7.4	G, J	8	500	4	2.80	0.11
TFI0201C8N2	8.2	G, J	8	500	3	3.00	0.11
TFI0201C9N1	9.1	G, J	8	500	3	3.25	0.10
TFI0201C9N2	9.2	G, J	8	500	3	3.25	0.10
TFI0201C10N	10	G, J	8	500	2	3.50	0.08
TFI0402C0N2	0.2	B, C, S	13	500	14	0.10	0.80
TFI0402C0N3	0.3	B, C, S	13	500	14	0.10	0.80
TFI0402C0N4	0.4	B, C, S	13	500	14	0.10	0.80
TFI0402C0N5	0.5	B, C, S	13	500	14	0.15	0.70
TFI0402C0N8	0.8	B, C, S	13	500	14	0.15	0.70
TFI0402C0N9	0.9	B, C, S	13	500	14	0.15	0.70
TFI0402C1N0	1.0	B, C, S	13	500	12	0.15	0.70
TFI0402C1N1	1.1	B, C, S	13	500	12	0.15	0.70
TFI0402C1N2	1.2	B, C, S	13	500	12	0.15	0.70
TFI0402C1N3	1.3	B, C, S	13	500	10	0.25	0.70
TFI0402C1N4	1.4	B, C, S	13	500	10	0.25	0.70
TFI0402C1N5	1.5	B, C, S	13	500	10	0.25	0.70
TFI0402C1N6	1.6	B, C, S	13	500	10	0.25	0.56
TFI0402C1N7	1.7	B, C, S	13	500	10	0.25	0.56
TFI0402C1N8	1.8	B, C, S	13	500	10	0.25	0.56
TFI0402C1N9	1.9	B, C, S	13	500	8	0.35	0.56
TFI0402C2N0	2.0	B, C, S	13	500	8	0.35	0.56

Other values may be available upon request.

TFI Series

<i>AEM Part Number</i>	<i>L, nH</i>	<i>Tolerance</i>	<i>Min. Q</i>	<i>Test Frequency MHz</i>	<i>Min. SRF GHz</i>	<i>Max. R_{DC} Ω</i>	<i>Max. I A</i>
TFI0402C2N1	2.1	B, C, S	13	500	8	0.35	0.44
TFI0402C2N2	2.2	B, C, S	13	500	8	0.35	0.44
TFI0402C2N3	2.3	B, C, S	13	500	8	0.35	0.44
TFI0402C2N4	2.4	B, C, S	13	500	8	0.35	0.44
TFI0402C2N5	2.5	B, C, S	13	500	8	0.35	0.44
TFI0402C2N6	2.6	B, C, S	13	500	8	0.35	0.44
TFI0402C2N7	2.7	B, C, S	13	500	8	0.35	0.44
TFI0402C2N8	2.8	B, C, S	13	500	6	0.45	0.38
TFI0402C2N9	2.9	B, C, S	13	500	6	0.45	0.38
TFI0402C3N0	3.0	B, C, S	13	500	6	0.45	0.38
TFI0402C3N1	3.1	B, C, S	13	500	6	0.45	0.38
TFI0402C3N2	3.2	B, C, S	13	500	6	0.45	0.38
TFI0402C3N3	3.3	B, C, S	13	500	6	0.45	0.38
TFI0402C3N4	3.4	B, C, S	13	500	6	0.55	0.38
TFI0402C3N5	3.5	B, C, S	13	500	6	0.55	0.38
TFI0402C3N6	3.6	B, C, S	13	500	6	0.55	0.38
TFI0402C3N7	3.7	B, C, S	13	500	6	0.55	0.34
TFI0402C3N8	3.8	B, C, S	13	500	6	0.55	0.34
TFI0402C3N9	3.9	B, C, S	13	500	6	0.55	0.34
TFI0402C4N3	4.3	B, C, S	13	500	6	0.65	0.32
TFI0402C4N7	4.7	B, C, S	13	500	6	0.65	0.32
TFI0402C5N4	5.4	B, C, S	13	500	6	0.85	0.28
TFI0402C5N6	5.6	B, C, S	13	500	6	0.85	0.28
TFI0402C5N6	5.9	B, C, S	13	500	6	0.85	0.28
TFI0402C6N5	6.5	B, C, S	13	500	6	1.05	0.26
TFI0402C6N8	6.8	B, C, S	13	500	6	1.05	0.26
TFI0402C7N2	7.2	B, C, S	13	500	6	1.05	0.26
TFI0402C8N0	8.0	B, C, S	13	500	5.5	1.25	0.22
TFI0402C8N1	8.1	B, C, S	13	500	5.5	1.25	0.22
TFI0402C8N2	8.2	B, C, S	13	500	5.5	1.25	0.22
TFI0402C9N1	9.1	B, C, S	13	500	5.5	1.25	0.22
TFI0402C10N	10	F, G, H, J	13	500	4.5	1.35	0.20
TFI0402C10N8	10.8	F, G, H, J	13	500	4.5	1.35	0.20
TFI0402C12N	12	F, G, H, J	13	500	3.7	1.55	0.18
TFI0402C13N8	13.8	F, G, H, J	13	500	3.7	1.75	0.18
TFI0402C15N	15	F, G, H, J	13	500	3.3	1.75	0.13
TFI0402C17N	17	F, G, H, J	13	500	3.1	1.95	0.10

Other values may be available upon request.

TFI Series

<i>AEM Part Number</i>	<i>L, nH</i>	<i>Tolerance</i>	<i>Min. Q</i>	<i>Test Frequency MHz</i>	<i>Min. SRF GHz</i>	<i>Max. R_{DC} Ω</i>	<i>Max. I A</i>
TFI0402C18N	18	F, G, H, J	13	500	3.1	2.15	0.10
TFI0402C20N8	20.8	F, G, H, J	13	500	2.8	2.55	0.09
TFI0402C22N	22	F, G, H, J	13	500	2.8	2.65	0.09
TFI0402C27N	27	F, G, H, J	13	500	2.5	3.25	0.075
TFI0402C33N	33	J	13	500	2.5	4.50	0.075
TFI0603C1N0	1.0	B, C, S	15	300	13	0.35	0.80
TFI0603C1N2	1.2	B, C, S	15	300	13	0.35	0.80
TFI0603C1N5	1.5	B, C, S	15	300	10	0.35	0.80
TFI0603C1N8	1.8	B, C, S	15	300	10	0.35	0.30
TFI0603C2N2	2.2	B, C, S	15	300	8	0.35	0.30
TFI0603C2N7	2.7	B, C, S	15	300	6	0.45	0.30
TFI0603C3N3	3.3	B, C, S	15	300	6	0.45	0.30
TFI0603C3N9	3.9	B, C, S	15	300	6	0.45	0.30
TFI0603C4N7	4.7	B, C, S	15	300	5	0.55	0.30
TFI0603C5N6	5.6	B, C, S	15	300	5	0.65	0.30
TFI0603C6N8	6.8	B, C, S	15	300	5	0.75	0.30
TFI0603C8N2	8.2	B, C, S	15	300	4	0.95	0.30
TFI0603C10N	10	F, G, H, J	15	300	4	0.95	0.30
TFI0603C12N	12	F, G, H, J	15	300	3	1.05	0.30
TFI0603C15N	15	F, G, H, J	15	300	3	1.35	0.30
TFI0603C18N	18	F, G, H, J	15	300	2	1.65	0.30
TFI0603C22N	22	F, G, H, J	15	300	2	1.95	0.25
TFI0603C27N	27	F, G, H, J	15	300	2	2.35	0.25
TFI0603C33N	33	F, G, H, J	15	300	1.5	2.75	0.25
TFI0603C39N	39	F, G, H, J	15	300	1.5	3.00	0.20
TFI0603C47N	47	F, G, H, J	15	300	1.5	3.00	0.20
TFI0603C56N	56	F, G, H, J	15	300	1	5.00	0.15
TFI0603C68N	68	F, G, H, J	15	300	1	5.00	0.15
TFI0603CR10	100	G, H, J	15	300	1	7.50	0.10

Other values may be available upon request.