

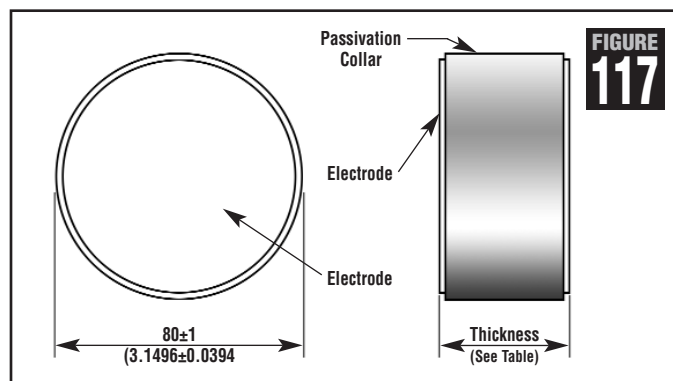
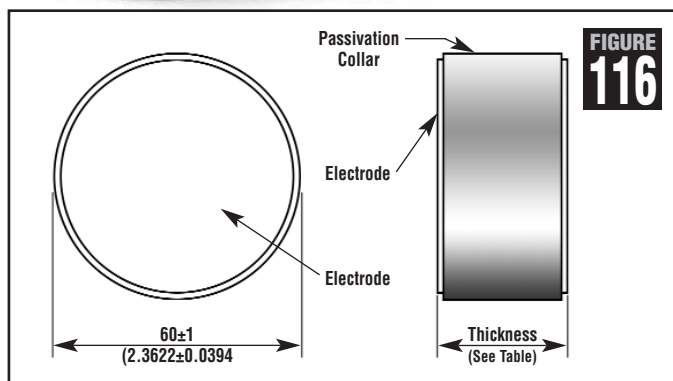


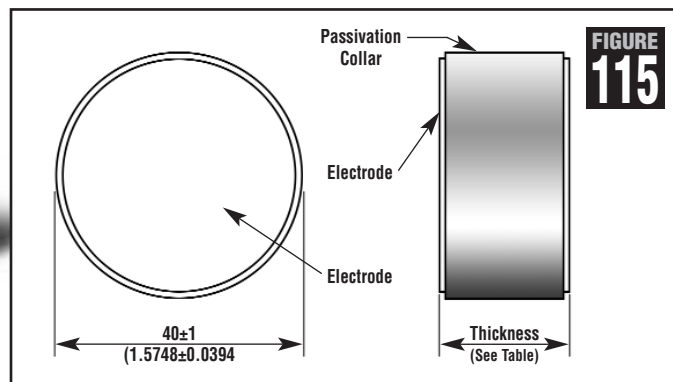

METAL OXIDE VARISTOR DISKS

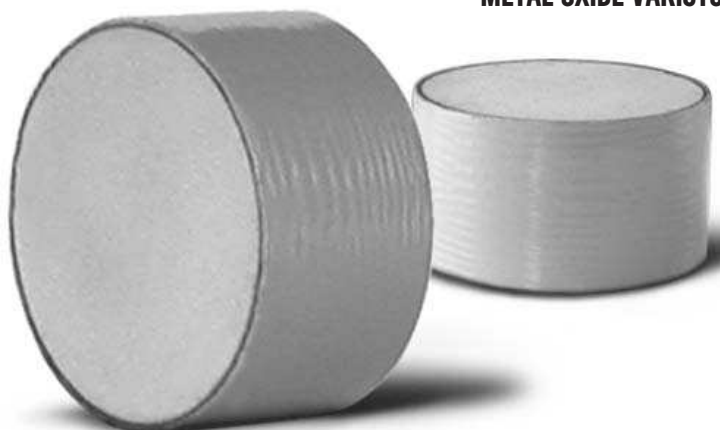

CKE Part Number	Max Allowable Voltage		Varistor Voltage @1mA	Clamping Voltage (Max)		Max Peak Current (8/20 μs)	Max Energy (Joules) 10/1000 μs	Typical Capacitance @kHz	Thickness	
	AC _{RMS} V	DC V	V _{NOM} V	V _C V	I _P A	A			T±0.0394 inches	T±1 mm
	Z40BD Series									
Z40BD201	130	170	200 (185-225)	340	300	40000	310	8400	0.0449	1.140
Z40BD241	150	200	240 (216-264)	395	300	40000	360	8000	0.0539	1.370
Z40BD271	175	225	270 (243-297)	455	300	40000	390	7600	0.0606	1.540
Z40BD331	210	275	330 (297-363)	550	300	40000	460	6700	0.0744	1.890
Z40BD361	230	300	360 (324-396)	595	300	40000	475	6200	0.0811	2.060
Z40BD391	250	320	390 (351-429)	650	300	40000	490	5100	0.0878	2.230
Z40BD431	275	350	430 (387-473)	710	300	40000	550	4900	0.0969	2.460
Z40BD471	300	385	470 (423-517)	775	300	40000	600	4300	0.1059	2.690
Z40BD511	320	415	510 (459-561)	845	300	40000	640	4200	0.1146	2.910
Z40BD621	385	505	620 (558-682)	1025	300	40000	720	3800	0.1394	3.540
Z40BD681	420	560	680 (612-748)	1120	300	40000	750	3500	0.1531	3.890
Z40BD751	460	615	750 (675-825)	1240	300	40000	780	3200	0.1689	4.290
Z40BD781	485	640	780 (702-858)	1290	300	40000	820	3000	0.1756	4.460
Z40BD821	510	670	820 (738-902)	1355	300	40000	900	2900	0.1846	4.690
Z40BD911	550	745	910 (819-1001)	1500	300	40000	960	2200	0.2047	5.200
Z40BD951	575	765	950 (855-1045)	1570	300	40000	1000	2000	0.2138	5.430
Z40BD102	625	825	1000 (900-1100)	1650	300	40000	1055	1800	0.2248	5.710
Z40BD112	680	895	1100 (990-1210)	1815	300	40000	1155	1600	0.2476	6.290
Z40BD122	750	970	1200 (1062-1300)	2100	300	40000	1200	1500	0.2701	6.860
Z40BD142	880	1150	1400 (1245-1520)	2290	300	40000	1300	1400	0.3150	8.000
Z40BD162	1000	1200	1600 (1414-1728)	2700	300	40000	1400	1300	0.3598	9.140