


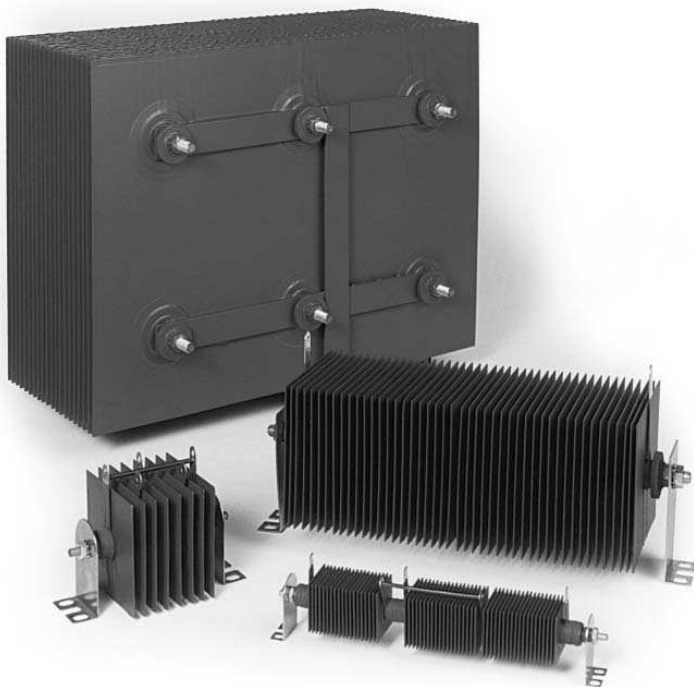

CKE Part Number	Max. DC Voltage	Max. clamping Voltage	Fig.	Dim. A (inches)	Thread size
Series A – 1" x 1"					
SD1543-4	90	240	67	1.0625	8-32
SD1543-5	112	300	67	1.1875	8-32
SD1543-6	135	360	67	1.3125	8-32
SD1543-7	157	420	67	1.3750	8-32
SD1543-8	180	480	67	1.5000	8-32
SD1543-9	202	540	67	1.5625	8-32
SD1543-10	225	600	67	1.6875	8-32
SD1543-11	247	660	67	1.8125	8-32
SD1543-12	270	720	67	1.8750	8-32
SD1543-13	292	780	67	2.0000	8-32
SD1543-14	315	840	67	2.0625	8-32
SD1543-15	337	900	67	2.1875	8-32
SD1543-16	360	960	67	2.3125	8-32
SD1551-17	382	1020	68	2.6250	8-32
SD1551-18	405	1080	68	2.7500	8-32
SD1551-19	427	1140	68	2.8750	8-32
SD1551-20	450	1200	68	2.9375	8-32
SD1551-21	472	1260	68	3.0625	8-32
SD1551-22	495	1320	68	3.1875	8-32
SD1551-23	517	1380	68	3.3125	8-32
SD1551-24	540	1440	68	3.3750	8-32
SD1551-25	562	1500	68	3.5000	8-32
SD1551-26	585	1560	68	3.5625	8-32
SD1551-27	607	1620	68	3.6875	8-32
SD1551-28	630	1680	68	3.8125	8-32
SD1551-29	652	1720	68	3.8750	8-32
SD1551-30	675	1800	68	4.0000	8-32

Peak discharge current - 3 Amps

CKE Part Number	Max. DC Voltage	Max. clamping Voltage	Fig.	Dim. A (inches)	Thread size
Series C – 1 1/2" x 1 1/2"					
SD3066-4	90	240	67	1.0625	8-32
SD3066-5	112	300	67	1.1875	8-32
SD3066-6	135	360	67	1.3125	8-32
SD3066-7	157	420	67	1.3750	8-32
SD3066-8	180	480	67	1.5000	8-32
SD3066-9	202	540	67	1.5625	8-32
SD3066-10	225	600	67	1.6875	8-32
SD3066-11	247	660	67	1.8125	8-32
SD3066-12	270	720	67	1.8750	8-32
SD3066-13	292	780	67	2.0000	8-32
SD3066-14	315	840	67	2.0625	8-32
SD3066-15	337	900	67	2.1875	8-32
SD3066-16	360	960	67	2.3125	8-32
SD3066-17	382	1020	68	2.6250	8-32
SD3066-18	405	1080	68	2.7500	8-32
SD3066-19	427	1140	68	2.8750	8-32
SD3066-20	450	1200	68	2.9375	8-32
SD3066-21	472	1260	68	3.0625	8-32
SD3066-22	495	1320	68	3.1875	8-32
SD3066-23	517	1380	68	3.3125	8-32
SD3066-24	540	1440	68	3.3750	8-32
SD3066-25	562	1500	68	3.5000	8-32
SD3066-26	585	1560	68	3.5625	8-32
SD3066-27	607	1620	68	3.6875	8-32
SD3066-28	630	1680	68	3.8125	8-32
SD3066-29	652	1720	68	3.8750	8-32
SD3066-30	675	1800	68	4.0000	8-32

Peak discharge current - 9 Amps

Series E – 2" x 2"					
SD2619-4	90	240	67	1.8750	1/4-20
SD2619-5	112	300	67	2.1250	1/4-20
SD2619-6	135	360	67	2.3750	1/4-20
SD2619-7	157	420	67	2.6250	1/4-20
SD2619-8	180	480	67	2.8750	1/4-20
SD2107-9	202	540	68	3.0000	1/4-20
SD2107-10	225	600	68	3.2500	1/4-20
SD2107-11	247	660	68	3.5000	1/4-20
SD2107-12	270	720	68	3.6875	1/4-20
SD2107-13	292	780	68	3.8750	1/4-20
SD2107-14	315	840	68	4.1250	1/4-20
SD2107-15	337	900	68	4.3750	1/4-20
SD2107-16	360	960	68	4.5625	1/4-20
SD2107-17	382	1020	68	4.8125	1/4-20
SD2107-18	405	1080	68	5.0000	1/4-20
SD2107-19	427	1140	68	5.2500	1/4-20
SD2107-20	450	1200	68	5.5625	1/4-20
SD2107-21	472	1260	68	5.7500	1/4-20
SD2107-22	495	1320	68	6.0000	1/4-20
SD2107-23	517	1380	68	6.1875	1/4-20
SD2107-24	540	1440	68	6.3750	1/4-20
SD2107-25	562	1500	68	6.6250	1/4-20
SD2107-26	585	1560	68	6.8750	1/4-20
SD2107-27	607	1620	68	7.0625	1/4-20
SD2107-28	630	1680	68	7.2500	1/4-20
SD2107-29	652	1720	68	7.5000	1/4-20
SD2107-30	675	1800	68	7.7500	1/4-20

Peak discharge current - 15 Amps

Replacement Selenium Rectifiers are available on special order. Consult factory www.cke.com