

XS SERIES

Extra-small High Voltage Biasing Supply



The XS Series of extra-small high-voltage power supplies is the smallest **regulated** DC-DC high-voltage power supply for applications that require a bias voltage ranging from 0 to 100V. At only 0.08in³ (1.3cc), these modules are ideal for use in size-critical applications.

- Output from 0 to 100V
- 100 milliwatts of output power
- Tight line/load regulation
- Output current limit protection
- 5 Volts DC Input
- Extra-small and lightweight
- PCB flat mounting
- Temperature coefficient <50ppm/°C
- Low ripple (<50mV peak to peak)
- Low noise due to metal shielding

Typical applications for the XS Series include the following:

Bias Supplies	Thin-film
Avalanche Photo Diodes (APD)	Ultrasonic
Silicon Photomultipliers (SiPM)	
Multi-pixel Photon Counter (MPPC)	

Please contact UltraVolt's customer service department for an analysis of your requirements.

PARAMETER	SPECIFICATION	UNITS
Input voltage Vin (pins 1 & 2)	5VDC \pm 0.5 (recommended) maximum: 12Vdc (reverse: -0.2V)	VDC
Input current	For 0V output voltage: <1.6 For 100V, no load: <3 At full output voltage, full load: <50	mA
HV output Vout (pin 4)	0 to 100 programmable	VDC
Output Power	0 to 100	mW
Polarity	Fixed positive or negative	-
HV setting (pin 3)	Via external voltage source 0/2.5V Accuracy: \pm 2% at full scale	-
Max. output current Iout	1 nominal	mA
Load voltage regulation	\pm 0.01% of full output voltage for no load to full load	-
Line voltage regulation	\pm 0.01% of full output voltage over specified input voltage range	-
Residual ripple	<50mV peak-to-peak – ripple can be reduced to less than 10mV by adding an external 100nF small CMS capacitor	-
Temperature coefficient	<50	PPM/°C
Output HV monitoring	Not available on this product	-
Output reference voltage	Not available on this product	-
HV power ON/OFF	Not available on this product	-
Operating temperature	-10 to +65, Full load, Max Eout, Case Temp	°C
Storage temperature	-10 to +70	°C
Safeguards	<ul style="list-style-type: none"> • Output current internally limited • Soft start feature: low overshoot 	-
Shielding	Ground return is to metal enclosure	-

Specifications subject to change without notice.




Making High Voltage Easier!®

Higher Service, Higher Performance, Higher Reliability

©2011, UltraVolt Inc. All rights reserved.

XS SERIES

Extra-small High Voltage Biasing Supply

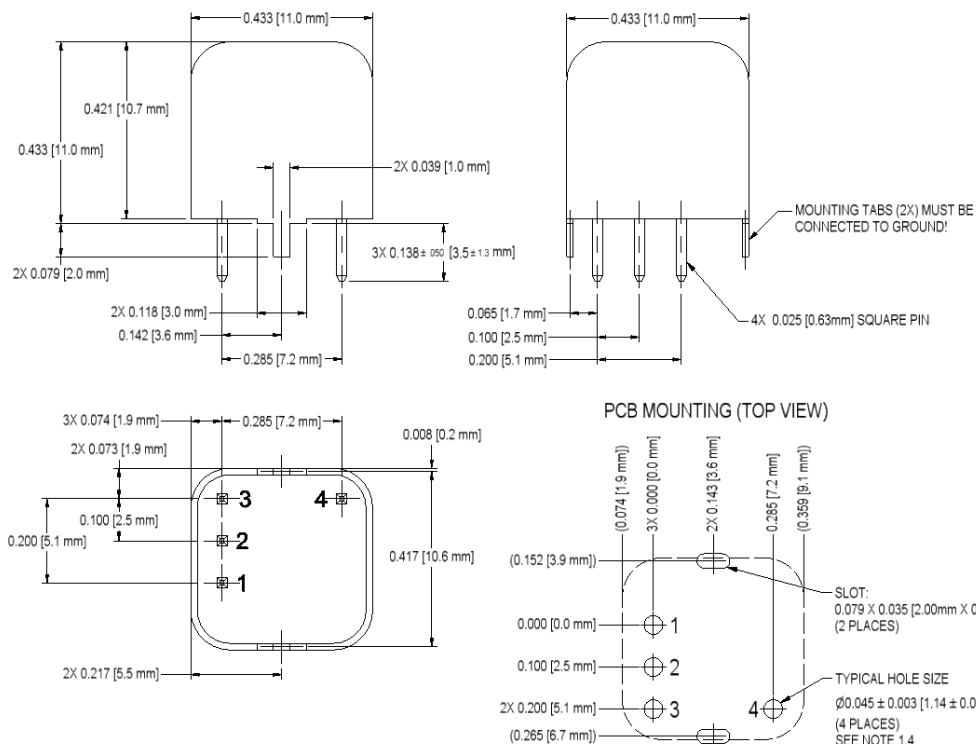

CONSTRUCTION

Steel, tin plated, thickness 0.02" (0.5)
Insulation: fully potted in an epoxy resin

SIZE

Volume: 0.081in³ (1.331cc)
Weight: 0.176oz (5g)

TOLERANCE

Overall ±0.030" (0.76)
Pin to Pin ±0.015" (0.38)
Pin to Tab ±0.020" (0.51)
Tabs to Tab ±0.020" (0.51)
Tab features ±0.020" (0.51)

PINS

Gold Plated 0.025" (0.63) sq.
Length > 0.079" (2)
Spacing 0.1" (2.54)

DRAWING VIEWS

Third angle projections


CONNECTIONS	
PIN	FUNCTION
1	Positive Power Input
2	Ground Return
3	Remote Adjust Input
4	HV Output

Note: Mounting tabs must be connected to ground.

ORDERING INFORMATION		
Type	0 to 100 VDC Output	0.1XS
Input	5VDC Nominal	5
Power	Watts Output	0.1
Case	Steel, Tin Plated	(Standard)
Polarity	Positive Output	-P
	Negative Output	-N



RoHS COMPLIANT Non-RoHS compliant units are available. Please contact the factory for more information.

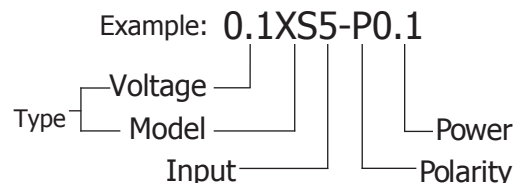

Popular accessories ordered with this product include the PCB-CONN-XS.

Rev. D 10/12

*The XS Series is not available in all territories. Please contact an UltraVolt Applications Engineer for details concerning sales in your area.



Making High Voltage Easier!

1800 Ocean Avenue, Ronkonkoma, NY 11779
Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com