




## Vertical Diode Laser Stacks

cw, actively cooled, with collimation, 808 nm

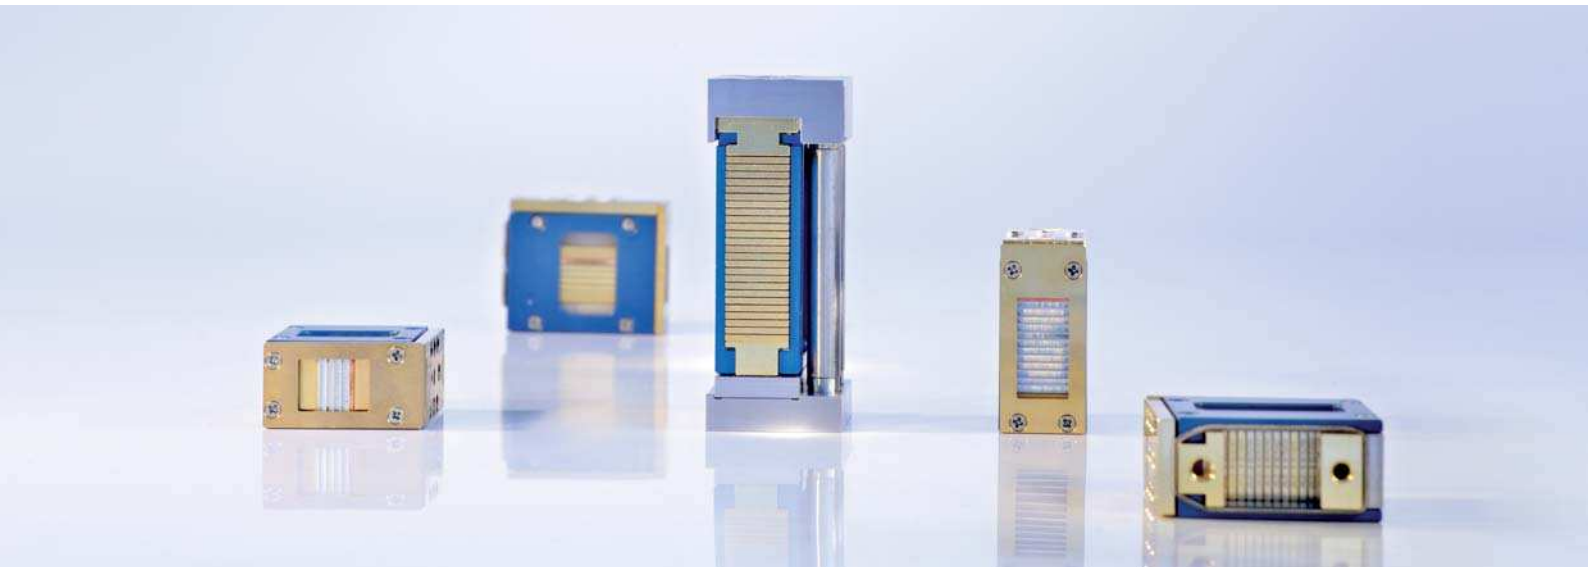

### JOLD-x-CABN-xA

#### Features:

- High optical output power of 50 W cw per bar after collimation (in fast and slow axis)
- High efficiency, low divergences
- Lifetime > 10,000 h, high reliability

### Design 210436x26

- |                         |                          |
|-------------------------|--------------------------|
| 210436126 (4 submounts) | 210436426 (10 submounts) |
| 210436226 (6 submounts) | 210436526 (12 submounts) |
| 210436326 (8 submounts) | 210436626 (25 submounts) |

#### Applications:

- Pumping of solid-state lasers and fiber lasers
- Material processing
- Medical applications (e.g. hair removal)

# Vertical Diode Laser Stacks

cw, actively cooled, with collimation, 808 nm

## Specifications (Start of Life)

### Product

JOLD-x-CABN-xA, Designs 210436126 (4 submounts), 210436226 (6 submounts), 210436326 (8 submounts), 210436426 (10 submounts), 210436526 (12 submounts), 210436626 (25 submounts)


Operation Mode	cw, power modulation only between threshold and maximum current						
Maximum Optical Output Power	200	300	400	500	600	1250	W
Number of Submounts	4	6	8	10	12	25	
Power per Submount after Collimation	50	50	50	50	50	50	W
Center Wavelength at 25 °C	808	808	808	808	808	808	nm
Center Wavelength Variation at 25 °C	3	3	3	3	3	3	nm
Typical Spectral Bandwidth (FWHM)	3	3	3	3	3	3	nm
Maximum Spectral Bandwidth (FWHM)	5	5	5	5	5	5	nm
Typical Operation Current	59	59	59	59	59	59	A
Maximum Operation Current	65	65	65	65	65	65	A
Typical Threshold Current	10	10	10	10	10	10	A
Maximum Threshold Current	13	13	13	13	13	13	A
Typical Slope	4.1	6.2	8.2	10.3	12.3	25.6	W/A
Minimum Slope	3.6	5.4	7.2	9.0	10.9	22.7	W/A
Maximum Operating Voltage	8	12	16	20	24	50	V
Fast Axis Divergence (Full Power)	< 0.5						°
Slow Axis Divergence (Full Power)	< 4						°
Operation Conditions	Cleanroom class 100, non-condensing atmosphere						
Expected Lifetime	> 10,000 h (constant current)						

### Cooling:

Number of Submounts	4	6	8	10	12	25	
Flow Rate	1.7	2.3	3.0	3.6	4.3	8.3	l/min
Flow Rate Tolerance	± 10 %						
Water Temperature	15 ... 35 °C						
Maximum Inlet Pressure	400 kPa						
Pressure Drop	< 200 kPa						
Water Quality	Deionized 2 ... 6 µS/cm, mixed bed ion exchanger, particle filter < 25 µm (not included)						

**See Safety and General User Information!**

Options on request: For additional designs or specifications please visit our website: [www.jenoptik.com](http://www.jenoptik.com)

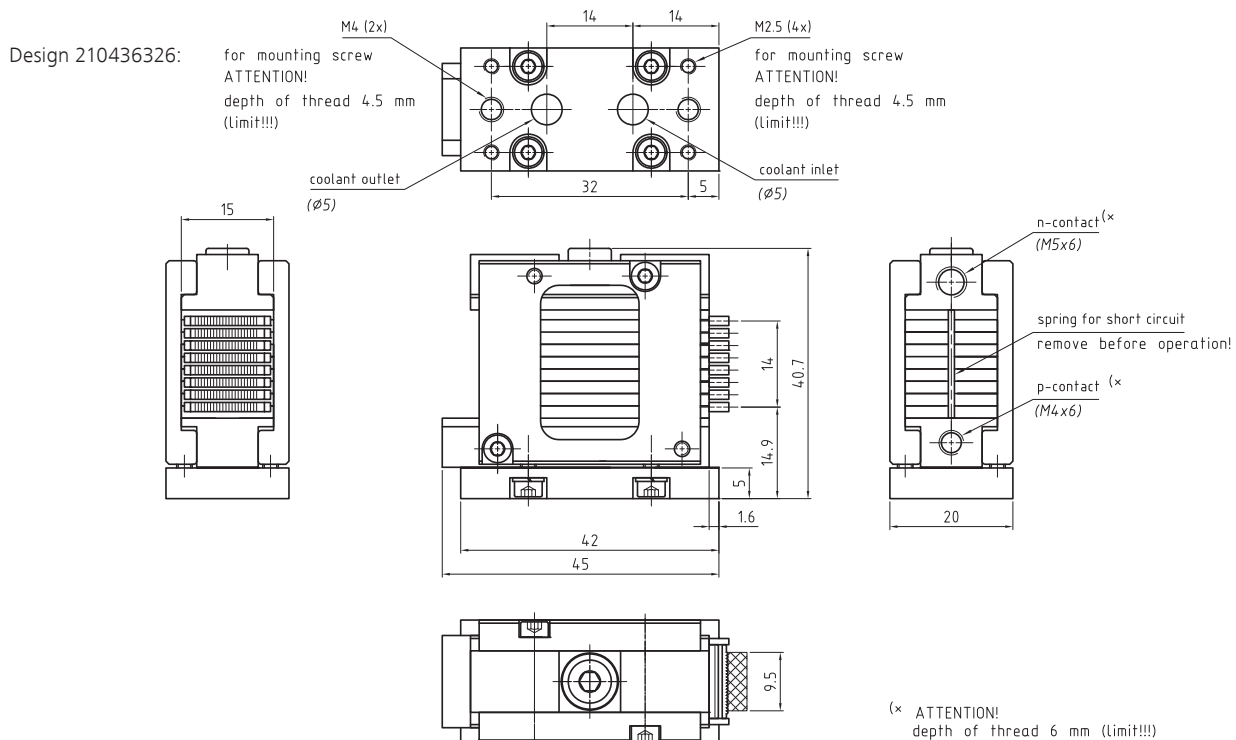

JENOPTIK | Lasers & Material Processing

JENOPTIK Laser GmbH

Goeschwitzer Strasse 29 | 07745 Jena | Germany

Phone: +49 3641 65-3053 | Fax: +49 3641 65-4011

E-mail: [sales-laser.lm@jenoptik.com](mailto:sales-laser.lm@jenoptik.com) | [www.jenoptik.com/diodelasers](http://www.jenoptik.com/diodelasers)