




High Power Diode Laser Bars

940 nm, 55 W cw

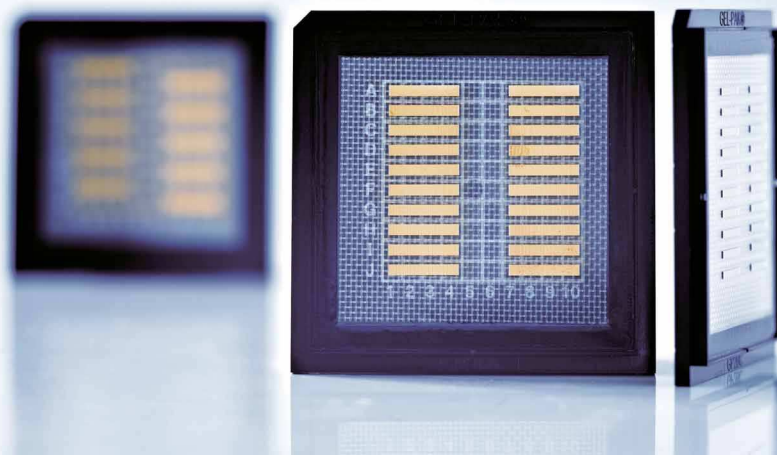

JDL-BAB-10-05-940-TE-55-4.0

Features:

- High laser power
- High efficiency
- Long lifetime, high reliability
- Excellent beam characteristics

Applications:

- Pumping of solid-state lasers and fiber lasers
- Industrial, scientific and medical systems
- Applications in the printing industry
- Defense and security

High Power Diode Laser Bars

940 nm, 55 W cw

Specifications

Product **JDL-BAB-10-05-940-TE-55-4.0**

	Symbol	Min	Nom	Max	Unit
Operation*					
Wavelength (cw)	λ	937	940	943	nm
Optical Output Power	P_{opt}		55		W
Operation Mode			cw, switched		
Power Modulation			100		%
Geometrical					
Number of Emitters			5		
Emitter Width	W	85	90	95	μm
Emitter Pitch	P		1000		μm
Filling Factor	F		10		%
Bar Width	B	4945	4950	4955	μm
Cavity Length	L	3980	4000	4020	μm
Thickness	D	115	120	125	μm
Electro Optical Data*					
Fast Axis Divergence (FWHM)	θ_{\perp}		23	26	$^{\circ}$
Fast Axis Divergence**	θ_{\perp}		53	55	$^{\circ}$
Slow Axis Divergence at 55 W (FWHM)	θ_{\parallel}		6	7	$^{\circ}$
Slow Axis Divergence at 55 W**	θ_{\parallel}		10	11	$^{\circ}$
Pulse Wavelength	λ	930	933	936	nm
Spectral Bandwidth (FWHM)	$\Delta\lambda$		3	4	nm
Slope Efficiency***	η	0.95	1.0		W/A
Threshold Current	I_{th}		2.60	2.80	A
Operating Current	I_{op}		60	61	A
Operating Voltage	V_{op}		1.55	1.65	V
Series Resistance	R_s		3	4	$\text{m}\Omega$
Degree of TE Polarization	α	95			%
EO Conversion Efficiency***	η_{tot}	57	60		%

* Mounted on a heat sink with $R_{th} = 0.5 \text{ K/W}$, coolant temperature $25 \text{ }^{\circ}\text{C}$, operating at nominal power


** Full width at 95 % power content

*** Item may change upon notice and acceptance by JENOPTIK Diode Lab GmbH, due to future improvements of technology or processing


Note: Nominal data represents typical values.

Safety Advices: Laser bars are the active components in high-power diode lasers in accordance to IEC standard class 4 laser products. As delivered, laser bars cannot emit any laser beam. The laser beam can only be released if the bars are connected to a source of electrical energy. In this case, IEC-Standard 60825-1 describes the safety regulations to be taken to avoid personal injury.

Power - Current - Voltage - Characteristics*

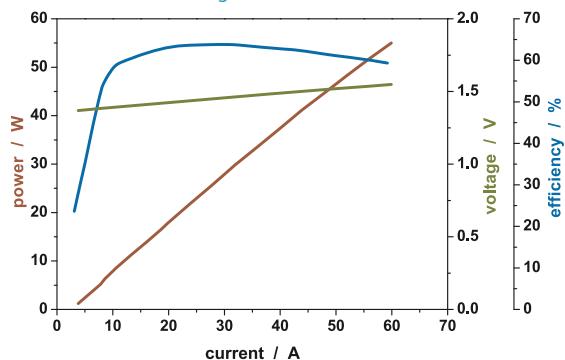

Spectral Characteristic*

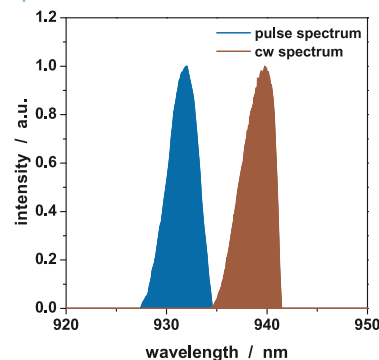

JENOPTIK | Lasers & Material Processing

JENOPTIK Diode Lab GmbH

Max-Planck-Strasse 2 | 12489 Berlin | Germany

Sales contact: JENOPTIK Laser GmbH | Phone: +49 3641 65-3053 | Fax: -4011

E-mail: sales-laser.lm@jenoptik.com | www.jenoptik.com/diodelasers