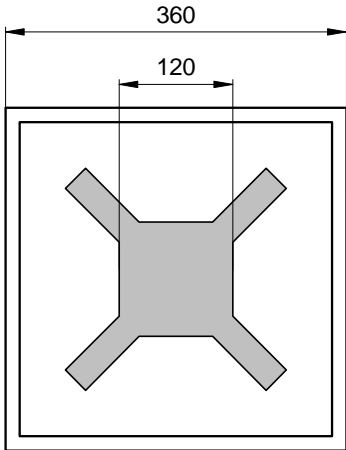


Radiation	Type	Technology	Electrodes
Red	DDH	AlGaAs/AlGaAs	N (cathode) up

 <p style="text-align: center;">LED-05</p>	typ. dimensions ( $\mu\text{m}$ )
	<p><u>typ. thickness</u> 150 (<math>\pm 25</math>) <math>\mu\text{m}</math></p> <p><u>cathode</u> gold alloy, 1.5 <math>\mu\text{m}</math></p> <p><u>anode</u> gold alloy, 0.5 <math>\mu\text{m}</math> structured, 25% covered</p>

### Optical and Electrical Characteristics

$T_{\text{amb}} = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Test conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 20 \text{ mA}$	$V_F$		1.8	2.5	V
Reverse voltage	$I_R = 100 \mu\text{A}$	$V_R$	5			V
Radiant power <sup>1</sup>	$I_F = 20 \text{ mA}$	$\Phi_e$	1.5	2.5		mW
Radiant power <sup>2</sup>	$I_F = 20 \text{ mA}$	$\Phi_e$		5		mW
Peak wavelength	$I_F = 20 \text{ mA}$	$\lambda_P$	680	690	700	nm
Spectral bandwidth at 50%	$I_F = 20 \text{ mA}$	$\Delta\lambda_{0.5}$		25		nm
Switching time	$I_F = 20 \text{ mA}$	$t_r, t_f$		25		ns

<sup>1</sup>Measured on bare chip on TO-18 header with JENOPTIK Polymer Systems equipment

<sup>2</sup>Measured on epoxy covered chip on TO-18 header with JENOPTIK Polymer Systems equipment

### Labeling

Type	Lot N°	$\Phi_e(\text{typ})$ [mW]	$V_F(\text{typ})$ [V]	Quantity
ELC-690-27				

**Packing:** Chips on adhesive film with wire-bond side on top