



RB1224

Overview

RB1224 Relay Module can be utilized in many different applications such as: Dry Contact, Line Seizure, Polarity Reversal, Latching Dry Contact, and much more. The RB1224 is snap track mountable.

Specifications

Input Voltage:

- 12VDC to 24VDC operation.
- Current draw: 75mA.

Trigger Input:

- Positive (+) or negative (-) ultra sensitive trigger (3VDC to 24VDC @ 20mA minimum).

Contact Rating:

- DPDT contacts rated at 5 amp/220VAC or 28VDC.

LED Indicators:

- Relay status LED.
- Remote LED status output.

Electrical:


- Operating temperature: - 25° C to 55° C ambient.

Mechanical:

- Snap track mountable (order part # ST1).
- Product weight (approx.): 0.48 lbs. (0.22 kg).
- Shipping weight (approx.): 0.52 lbs. (0.24 kg).

Board Dimensions (L x W x H) (approximate):

2.75" (69.85mm) x 2.0" (50.8mm) x 1" (25.4mm)

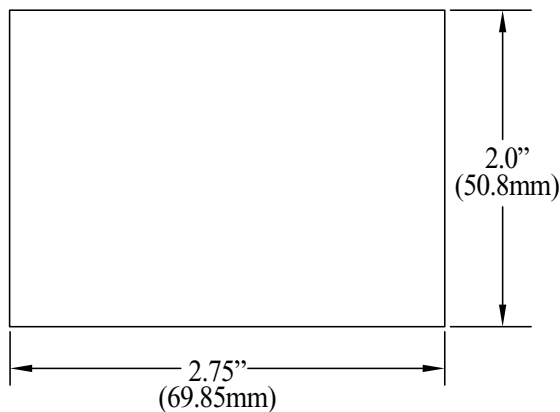

ST1 Mechanical Drawing

