

150mA 36V Input LDO Regulator

NO.EA-258-111025

OUTLINE

The R1516x Series are CMOS-based high-voltage resistant and low supply current voltage regulator ICs that provide the minimum 150mA of output voltage. Internally, the R1516x Series consists of a Foldback Protection Circuit, and a Thermal Shutdown Circuit in addition to the basic regulator circuits. The operating temperature range is between -40°C to 105°C , and the maximum input voltage is 36V. All these features allow the R1516x Series to become an ideal power source of electric home appliances.

The R1516x Series are available in fixed output voltage options between 1.8V and 6.2V in 0.1V steps. The output voltage accuracy is $\pm 1\%$.

The R1516x Series are available in two types of packages: SOT-89-5 that is for high-density mounting and HSOP-6J that is for high wattage.


FEATURES

- Input Voltage Range..... 4V to 36V
- Supply Current Typ. 29 μA
- Standby Current Typ. 0.1 μA
- Output Voltage Temperature Coefficient Typ. $\pm 100\text{ppm}/^{\circ}\text{C}$
- Output Current Min. 150mA ($V_{\text{OUT}}=5.0\text{V}$, $V_{\text{IN}}=8.0\text{V}$)
- Line Regulation Typ. 0.1%/V
- Output Voltage Accuracy..... $\pm 1\%$ ($V_{\text{OUT}} \geq 3.2\text{V}$, $T_{\text{opt}}=25^{\circ}\text{C}$)
- Packages SOT-89-5, HSOP-6J
- Output Voltage Range..... 1.8V to 6.2V (0.1V steps)
(For other voltages, please refer to MARK INFORMATION.)
- Built-in Foldback Protection Circuit..... 50mA (Current at short mode)
- Built-in Thermal Shutdown Circuit..... Stops at 150°C
- Operating Temperature -40 to 105°C

APPLICATIONS

- Power source for home appliances such as refrigerators, rice cookers, electric hot-water pot.
- Power source for notebook PCs, digital TVs, cordless phones, and private LAN system.
- Power source for office equipment machines such as copiers, printers, facsimiles, scanners, projectors.

BLOCK DIAGRAMS


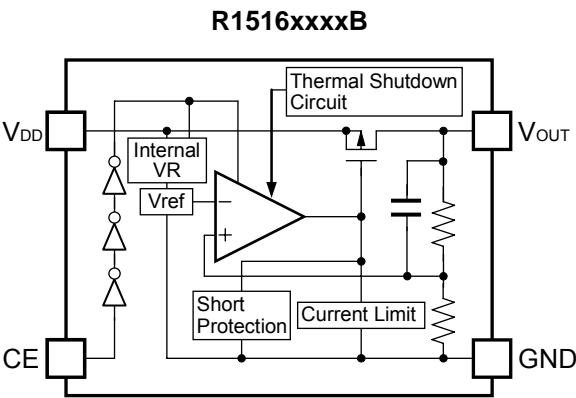


SELECTION GUIDE

The output voltage and the package for the ICs can be selected at the user's request.

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
R1516HxxxB-T1-FE	SOT-89-5	1,000pcs	Yes	Yes
R1516SxxxB-E2-FE	HSOP-6J	1,000pcs	Yes	Yes
xxx : The output voltage can be designated in the range of 1.8V (018) to 6.2V (062) in 0.1V steps. (For other voltages, please refer to MARK INFORMATION.)				

PIN CONFIGURATIONS



PIN DESCRIPTIONS

● SOT-89-5

Pin No.	Symbol	Description
1	V_{OUT}	Output Pin
2	GND*	Ground Pin
3	CE	Chip Enable Pin ("H" Active)
4	GND*	Ground Pin
5	V_{DD}	Input Pin

*) The GND pin must be wired together when it is mounted on board.

● HSOP-6J

Pin No.	Symbol	Description
1	V_{OUT}	Output Pin
2	GND*	Ground Pin
3	CE	Chip Enable Pin ("H" Active)
4	GND*	Ground Pin
5	GND*	Ground Pin
6	V_{DD}	Input Pin

*) The GND pin must be wired together when it is mounted on board.

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	$-0.3 \sim 50$	V
V_{IN}	Peak Input Voltage ^{*1}	60	V
V_{CE}	Input Voltage (CE Pin)	$-0.3 \sim V_{IN} + 0.3 \leq 50$	V
V_{OUT}	Output Voltage	$-0.3 \sim V_{IN} + 0.3 \leq 50$	V
I_{OUT}	Output Current	250	mA
P_D	Power Dissipation (SOT-89-5) ^{*2}	900	mW
	Power Dissipation (HSOP-6J) ^{*2}	1700	
T_{opt}	Operating Temperature Range	-40 to $+105$	°C
T_{stg}	Storage Temperature Range	-55 to $+125$	°C

*1) Duration time: 200ms

*2) For Power Dissipation, please refer to PACKAGE INFORMATION.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

ELECTRICAL CHARACTERISTICS

The specifications in are applicable under the condition of $-40^{\circ}\text{C} \leq T_{\text{opt}} \leq 105^{\circ}\text{C}$.

● R1516xxxxB

$T_{\text{opt}}=25^{\circ}\text{C}$

Symbol	Item	Conditions		Min.	Typ.	Max.	Unit
V _{IN}	Input Voltage			4		36	V
I _{SS}	Supply Current	V _{IN} =V _{OUT} +3.0V, I _{OUT} =0mA			29	45	μA
I _{standby}	Standby Current	V _{IN} =36V, V _{CE} =0V			0.1	1.0	μA
V _{OUT}	Output Voltage	V _{IN} =V _{OUT} +3.0V, I _{OUT} =1mA	V _{OUT} ≥ 3.2V	×0.99 ×0.98		×1.01 ×1.02	V
			V _{OUT} < 3.2V	×0.985 ×0.975		×1.015 ×1.025	
I _{OUT}	Output Current	Please refer to “Output Current by Output Voltage”.					
ΔV _{OUT} /ΔI _{OUT}	Load Regulation	Please refer to “Load Regulation by Output Voltage”.					
ΔV _{OUT} /ΔV _{IN}	Line Regulation	I _{OUT} =1mA	V _{OUT} +1.5V ≤ V _{IN} ≤ 36V, (V _{OUT} ≥ 2.5V)		0.1	0.7	%V
			4V ≤ V _{IN} ≤ 36V, (V _{OUT} < 2.5V)				
V _{DIF}	Dropout Voltage	Please refer to “Dropout Voltage by Output Voltage”.					
ΔV _{OUT} /ΔT _{opt}	Output Voltage Temperature Coefficient	V _{IN} =V _{OUT} +3.0V, I _{OUT} =1mA −40°C ≤ T _{opt} ≤ 105°C			±100		ppm/°C
I _{SC}	Short Current Limit	V _{OUT} =0V			50		mA
V _{CEH}	CE Input Voltage “H”			1.3		V _{IN}	V
V _{CEL}	CE Input Voltage “L”			0		0.35	V
T _{TSD}	Thermal Shutdown Temperature	Junction Temeprature			150		°C
T _{TSR}	Thermal Shutdown Released Temperature	Junction Temeprature			125		°C

● Output Current by Output Voltage

$T_{\text{opt}}=25^{\circ}\text{C}$

Output Voltage V_{OUT} (V)	Output Current I_{OUT} (mA)	
	Condition	Min.
$1.8 \leq V_{\text{OUT}} < 3.0$	$V_{\text{IN}}=V_{\text{OUT}}+5.0\text{V}$	150
$3.0 \leq V_{\text{OUT}} < 5.0$	$V_{\text{IN}}=V_{\text{OUT}}+4.0\text{V}$	
$5.0 \leq V_{\text{OUT}} \leq 6.2$	$V_{\text{IN}}=V_{\text{OUT}}+3.0\text{V}$	

● Load Regulation by Output Voltage

$T_{\text{opt}}=25^{\circ}\text{C}$

Output Voltage V_{OUT} (V)	Load Regulation (mV)		
	Condition	Typ.	Max.
$1.8 \leq V_{\text{OUT}} \leq 3.0$	$V_{\text{IN}}=V_{\text{OUT}}+3.0\text{V}$ $1\text{mA} \leq I_{\text{OUT}} \leq 40\text{mA}$	30 ($V_{\text{OUT}}=3.0\text{V}$)	70
$3.0 < V_{\text{OUT}} \leq 5.0$		40 ($V_{\text{OUT}}=5.0\text{V}$)	105
$5.0 < V_{\text{OUT}} \leq 6.2$		50 ($V_{\text{OUT}}=6.2\text{V}$)	125

● Dropout Voltage by Output Voltage


(I_{OUT}=20mA)T_{opt}=25°C

Output Voltage V _{OUT} (V)	Dropout Voltage V _{DIF} (V)
	Max.
V _{OUT} =1.8	2.30
V _{OUT} =1.9	2.20
V _{OUT} =2.0	2.10
V _{OUT} =2.1	2.00
V _{OUT} =2.2	1.90
V _{OUT} =2.3	1.80
V _{OUT} =2.4	1.70
V _{OUT} =2.5	1.60
V _{OUT} =2.6	1.50
V _{OUT} =2.7	1.40
V _{OUT} =2.8	1.30
V _{OUT} =2.9	1.20
V _{OUT} =3.0	1.10
V _{OUT} =3.1	1.06
V _{OUT} =3.2	1.02
V _{OUT} =3.3	0.98
V _{OUT} =3.4	0.94
V _{OUT} =3.5	0.90
V _{OUT} =3.6	0.86
V _{OUT} =3.7	0.82
V _{OUT} =3.8	0.78
V _{OUT} =3.9	0.74
V _{OUT} =4.0	0.70
V _{OUT} =4.1	0.69
V _{OUT} =4.2	0.68
V _{OUT} =4.3	0.67
V _{OUT} =4.4	0.66
V _{OUT} =4.5	0.65
V _{OUT} =4.6	0.64
V _{OUT} =4.7	0.63
V _{OUT} =4.8	0.62
V _{OUT} =4.9	0.61
5.0 ≤ V _{OUT} ≤ 6.2	0.60

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

TYPICAL APPLICATION

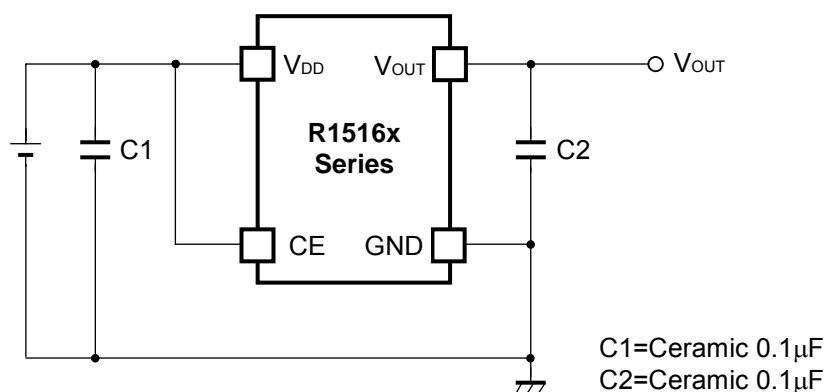

TECHNICAL NOTES

When using the R1516x Series, please consider the following points.

Phase Compensation

The R1516x Series provide the constant-voltage without using C1 and C2 capacitors. However, if the input line is too long, C1 should be connected. To minimize the input voltage fluctuation and the transient output voltage fluctuation that is caused by the load fluctuation, C2 size should be increased. Please refer to the Basic Test Circuit below when connecting a 0.1 μ F to 20 μ F C1 capacitor from V_{DD} to GND, and also connecting a 0.1 μ F to 20 μ F C2 capacitor from V_{OUT} to GND. The C1 and C2 capacitors, V_{DD}, GND and V_{OUT} should be connected as close as possible to each other.

GND Wiring on Boards

For SOT-89-5 package, please connect the No.2 pin and the No.4 pin to the ground plane on the board.

For HSOP-6J package, please connect the No.2 pin, the No.4 pin and the No.5 pin to the ground plane on the board.


Thermal Shutdown

The thermal shutdown is included, which limits the junction temperature to a maximum 150°C (Typ.). Under extreme conditions when the junction temperature begins to rise above 150°C, the output is turned off, reducing the output current to zero. When the junction temperature drops below +125°C (Typ.), the output is turned on again and the output current is restored to its nominal value. The output repeats turning on and off to form a pulse shaped output unless the causes of the temperature rise are removed.


Chip Enable (CE) Circuit

The electrical potential level of chip enable (CE) pin should not be set in between V_{CEH} and V_{CEL}. Using the electrical potentials in between V_{CEH} and V_{CEL} may cause the increase of supply current and may result in unstable output.


TEST CIRCUITS

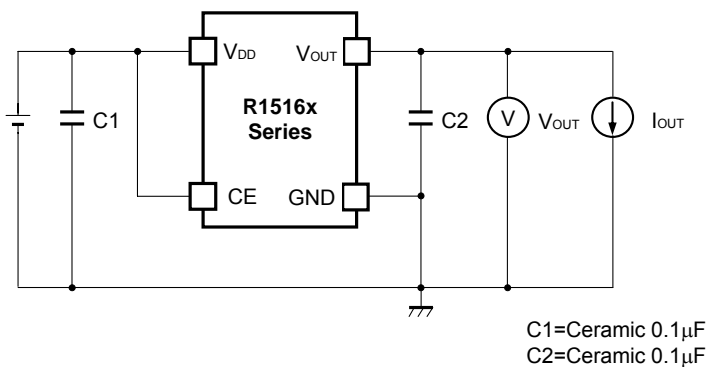


Basic Test Circuit

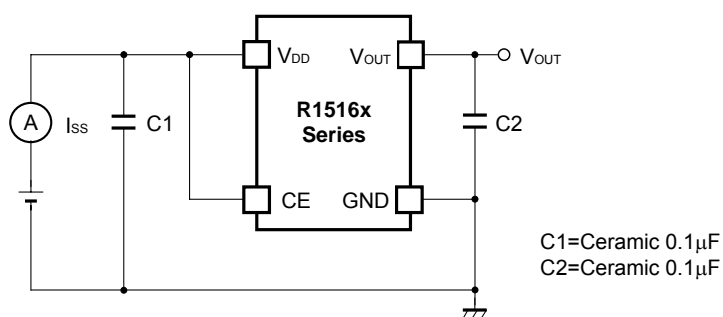

Test Circuit for Supply Current

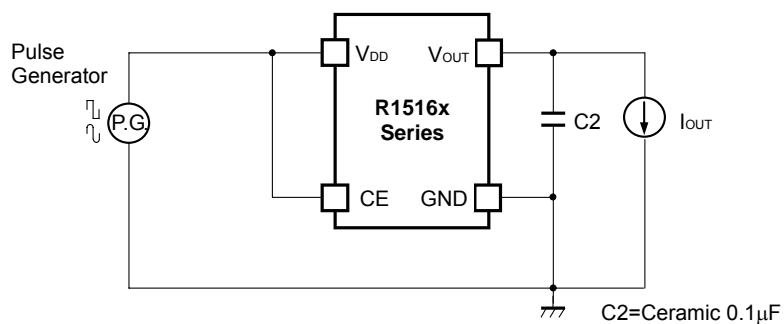



Test Circuit for Line Transient Response

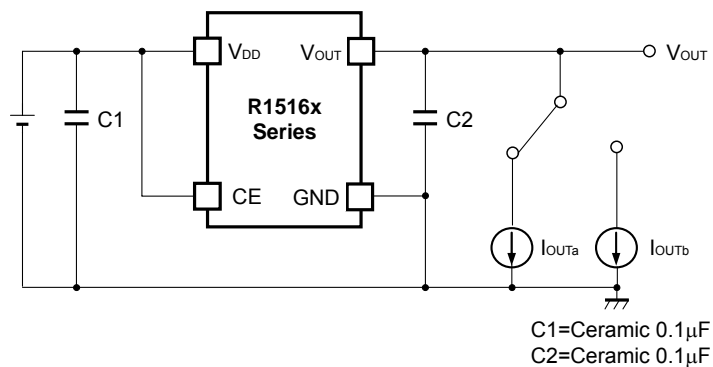



Test Circuit for Load Transient Response

Typical Characteristics



1) Output Voltage vs. Output Current ($C_1=0.1\mu\text{F}$, $C_2=0.1\mu\text{F}$, $T_{\text{opt}}=25^\circ\text{C}$)





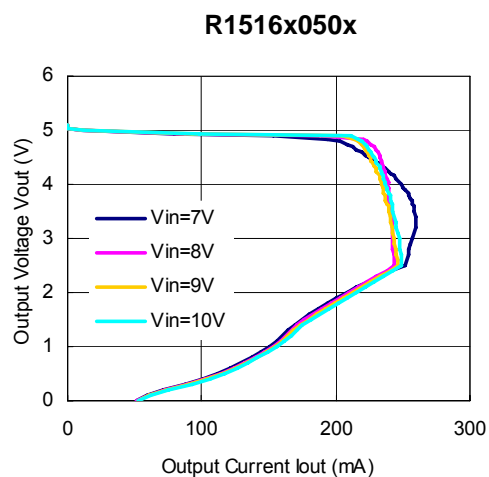
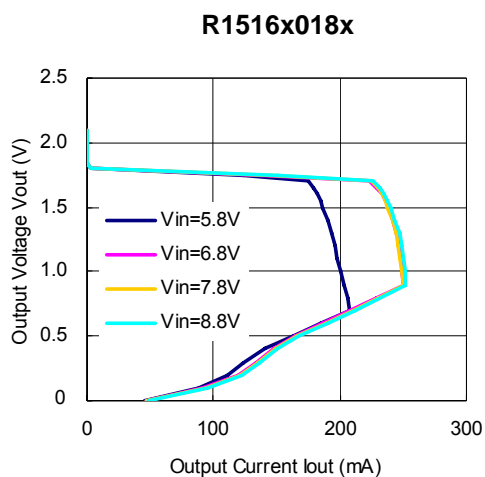


2) Output Voltage vs. Input Voltage ($C_1=0.1\mu\text{F}$, $C_2=0.1\mu\text{F}$, $T_{\text{opt}}=25^\circ\text{C}$)



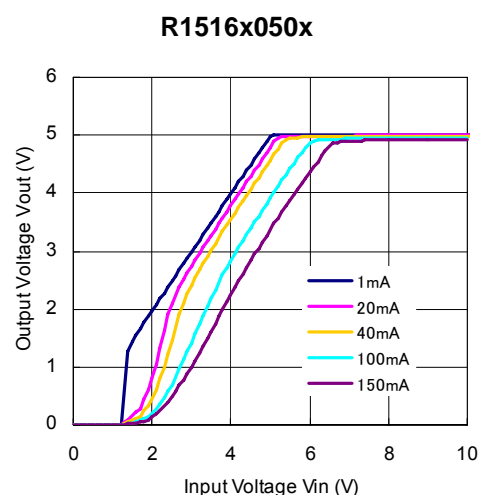
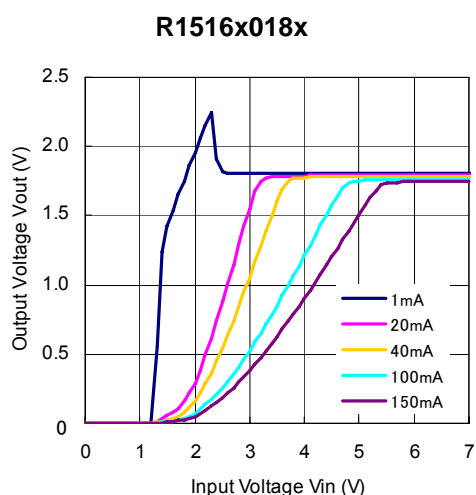


3) Dropout Voltage vs. Output Voltage ($C_1=0.1\mu\text{F}$, $C_2=0.1\mu\text{F}$, $T_{\text{opt}}=25^\circ\text{C}$)

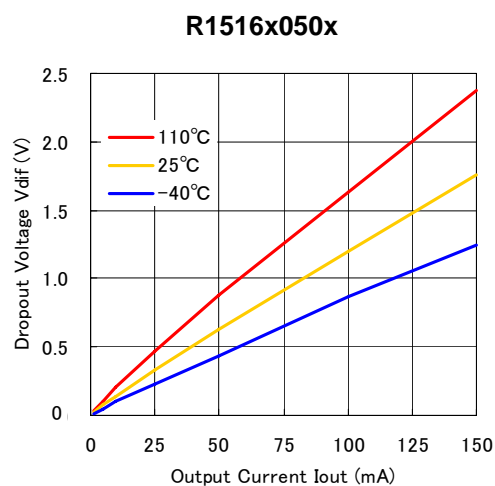
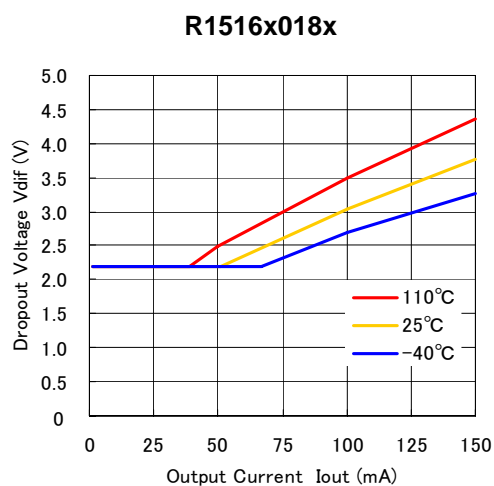


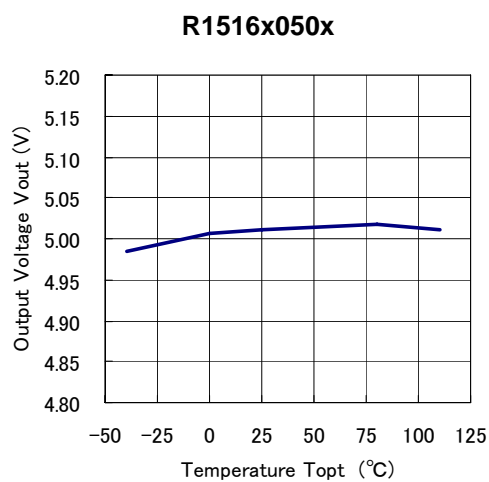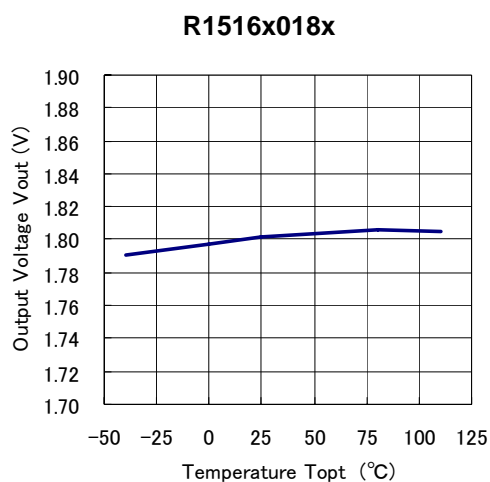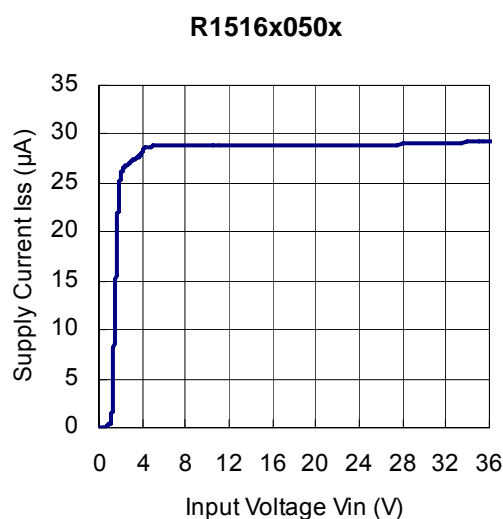
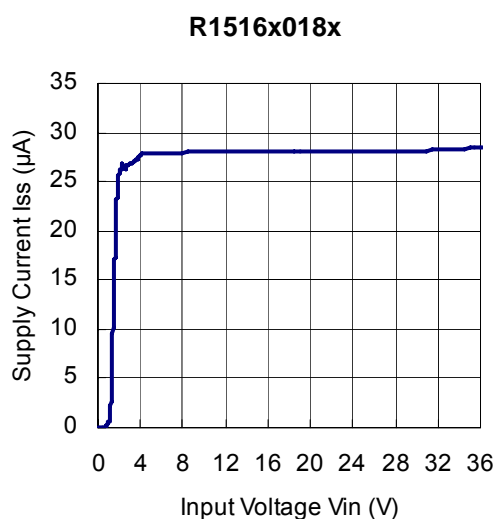
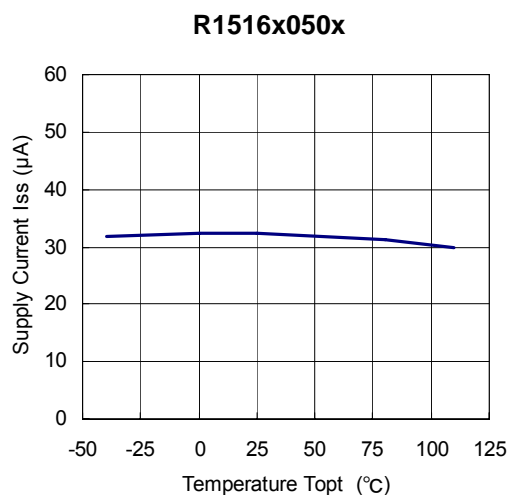
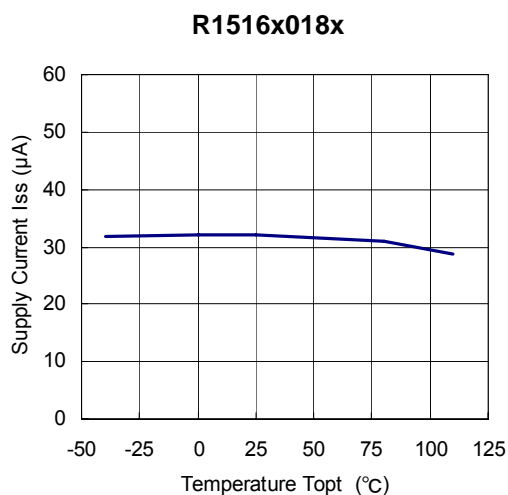
4) Output Voltage vs. Temperature (C1=0.1 μ F, C2=0.1 μ F)**5) Supply Current vs. Input Voltage (C1=0.1 μ F, C2=0.1 μ F, T_{opt}=25°C)****6) Supply Current vs. Temperature (C1=0.1 μ F, C2=0.1 μ F)**

7) Input Transient Response (C_1 =none, C_2 =Ceramic $0.1\mu\text{F}$, $I_{\text{OUT}}=1\text{mA}$, $T_{\text{opt}}=25^\circ\text{C}$)

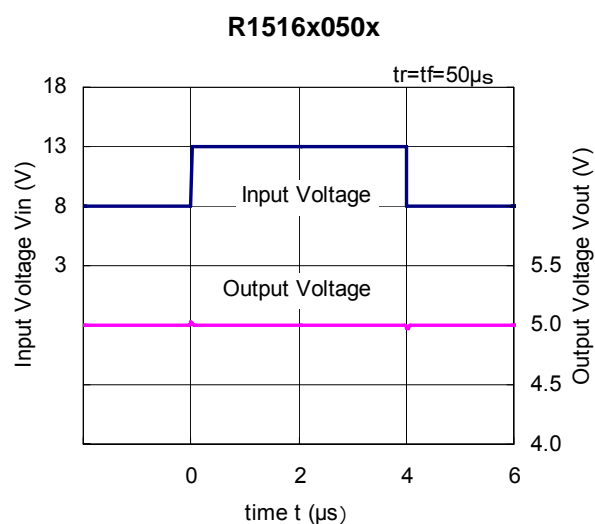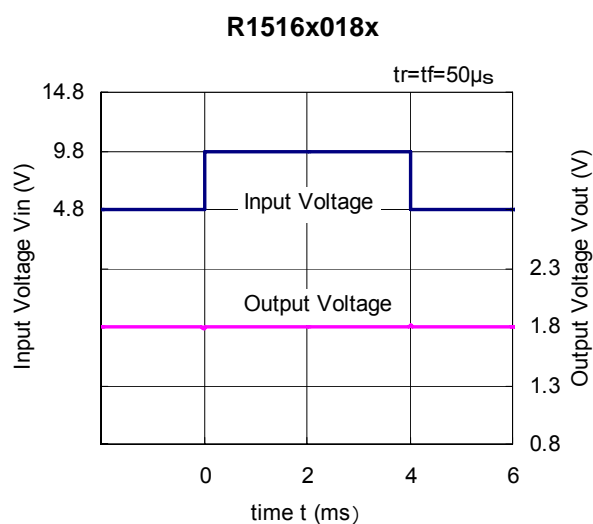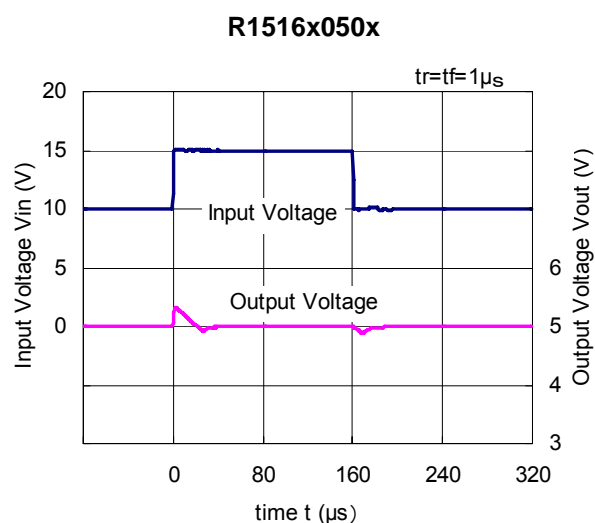
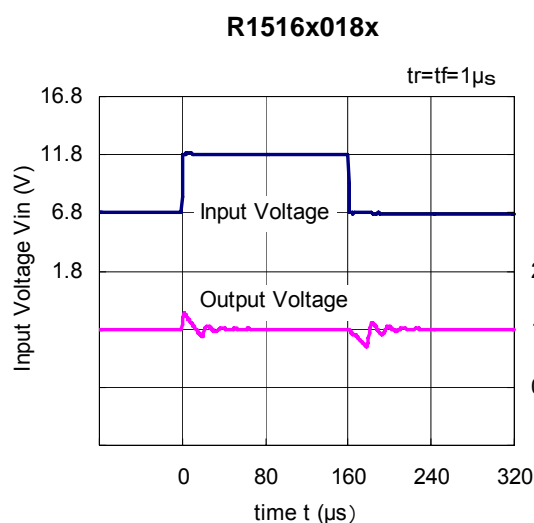




8) Load Transient Response (C_1 =Ceramic $0.1\mu\text{F}$, C_2 =Ceramic $0.1\mu\text{F}$, $T_{\text{opt}}=25^\circ\text{C}$)

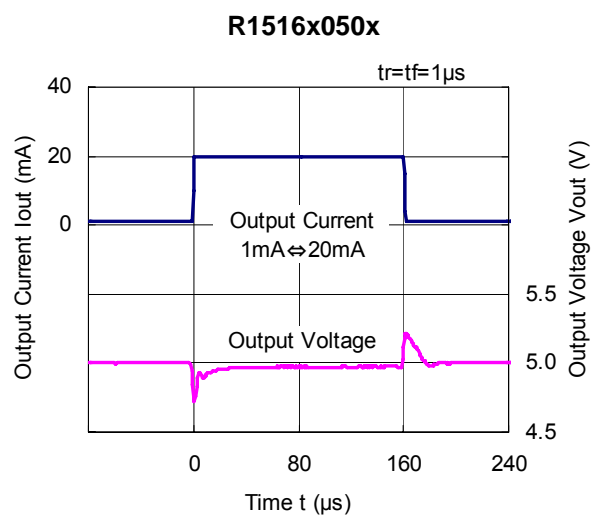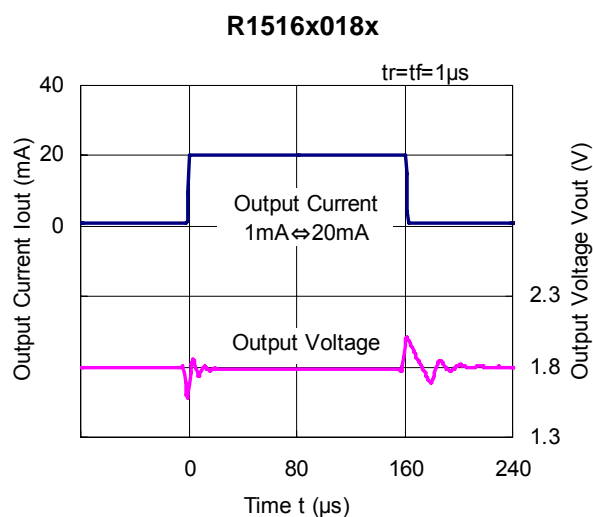

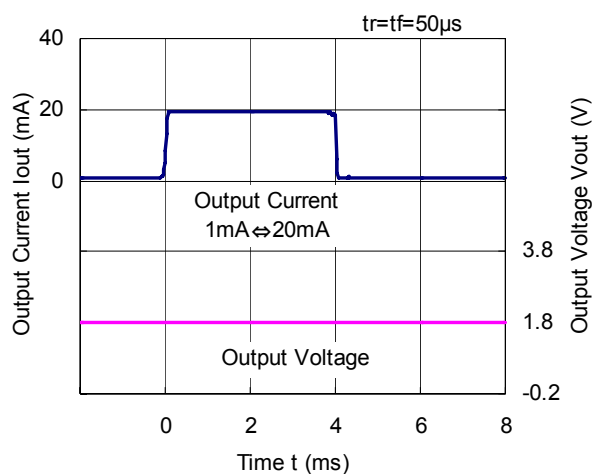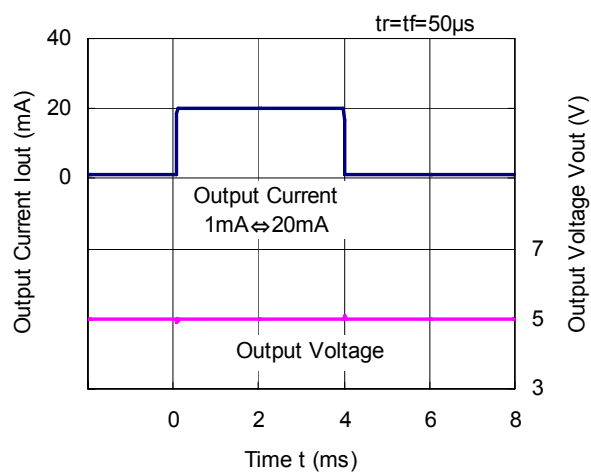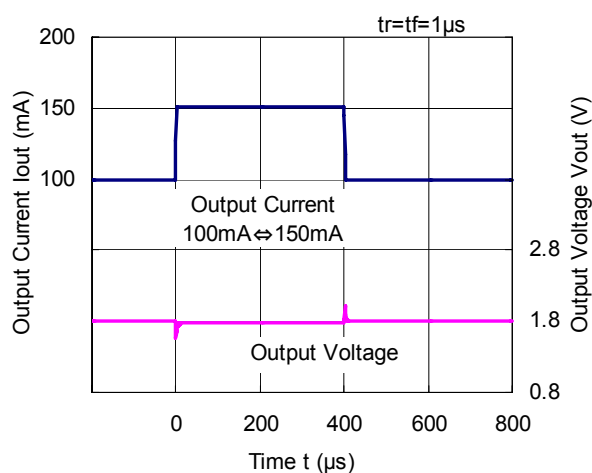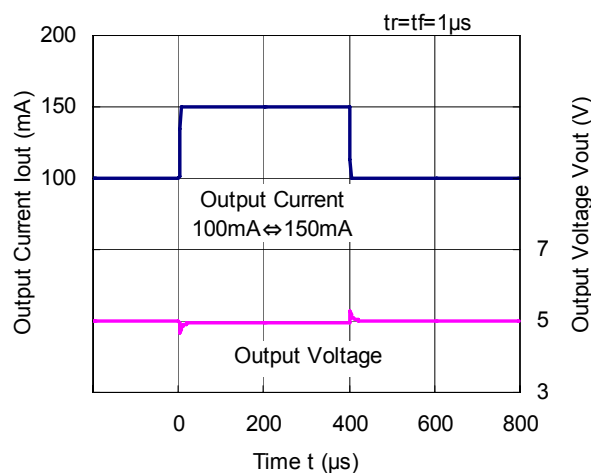R1516x018x

R1516x050x

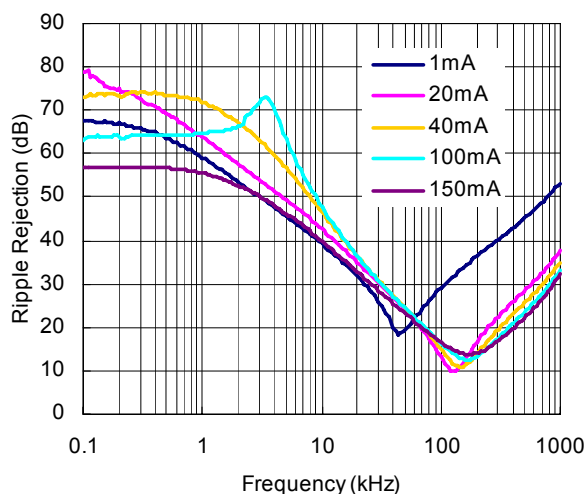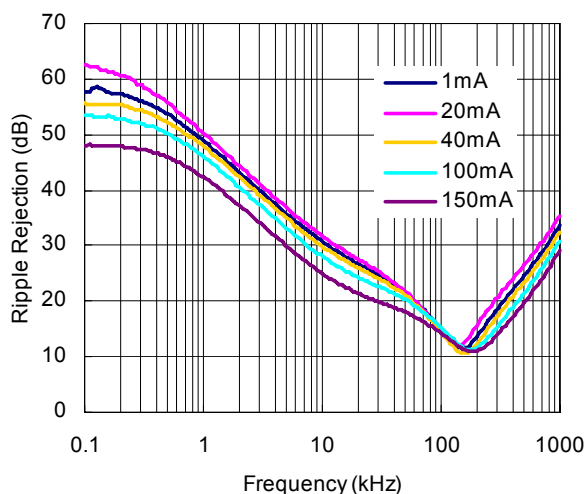R1516x018x

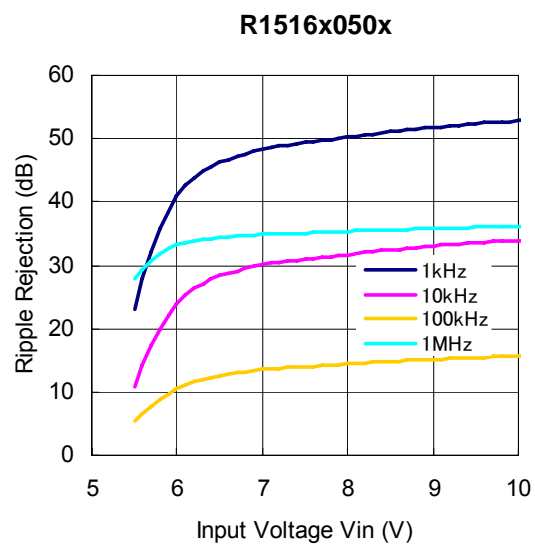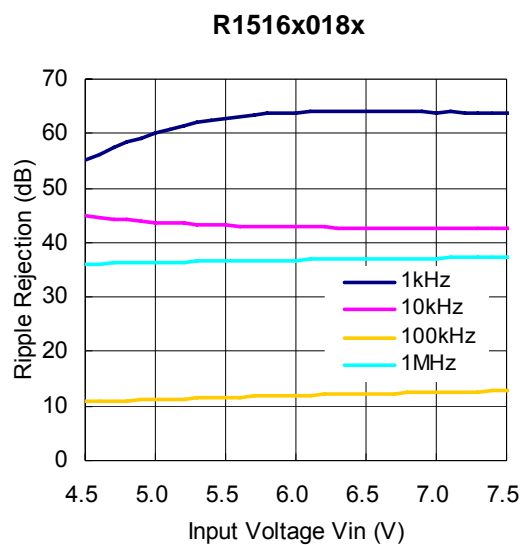R1516x050x


9) Ripple Rejection vs. Frequency (C1=none, C2=Ceramic 0.1 μ F, Ripple=0.5Vp-p, T_{opt}=25 $^{\circ}$ C)

R1516x018x

R1516x050x


10) Ripple Rejection vs. Input Voltage (C1=none, C2=Ceramic 0.1 μ F, I_{OUT}=20mA, Ripple=0.5Vp-p, T_{opt}=25°C)



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, firecontainment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.

RICOH COMPANY., LTD. Electronic Devices Company



■ Ricoh presented with the Japan Management Quality Award for 1999.
Ricoh continually strives to promote customer satisfaction, and shares the achievements of its management quality improvement program with people and society.



■ Ricoh awarded ISO 14001 certification.

The Ricoh Group was awarded ISO 14001 certification, which is an international standard for environmental management systems, at both its domestic and overseas production facilities. Our current aim is to obtain ISO 14001 certification for all of our business offices.

<http://www.ricoh.com/LSI/>

RICOH COMPANY, LTD. Electronic Devices Company

● Higashi-Shinagawa Office (International Sales)
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.

● Semiconductor Support Centre
Prof. W.H.Keesomlaan 1, 1183 DL Amstelveen, The Netherlands
P.O.Box 114, 1180 AC Amstelveen
Phone: +31-20-5474-309 Fax: +31-20-5474-791

RICOH ELECTRONIC DEVICES KOREA Co., Ltd.

11 floor, Haesung 1 building, 942, Daechidong, Gangnamgu, Seoul, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2135-5705

RICOH ELECTRONIC DEVICES SHANGHAI Co., Ltd.

Room403, No.2 Building, 690#Bi Bo Road, Pu Dong New district, Shanghai 201203,
People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH COMPANY, LTD. Electronic Devices Company

● Taipei office
Room109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623



Ricoh completed the organization of the Lead-free production for all of our products. After Apr. 1, 2006, we will ship out the lead free products only. Thus, all products that will be shipped from now on comply with RoHS Directive.