

14118 Stowe Drive, Suite B | Poway, CA 92064  
 TEL: (858) 621-2700 | FAX: (858) 486-1927  
 URL: [www.zcomm.com](http://www.zcomm.com)  
 EMAIL: [applications@zcomm.com](mailto:applications@zcomm.com)


### Voltage-Controlled Oscillator Surface Mount Module

#### Applications

- RF Modems
- Test Instrumentation
- Earthstations

#### Application Notes

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

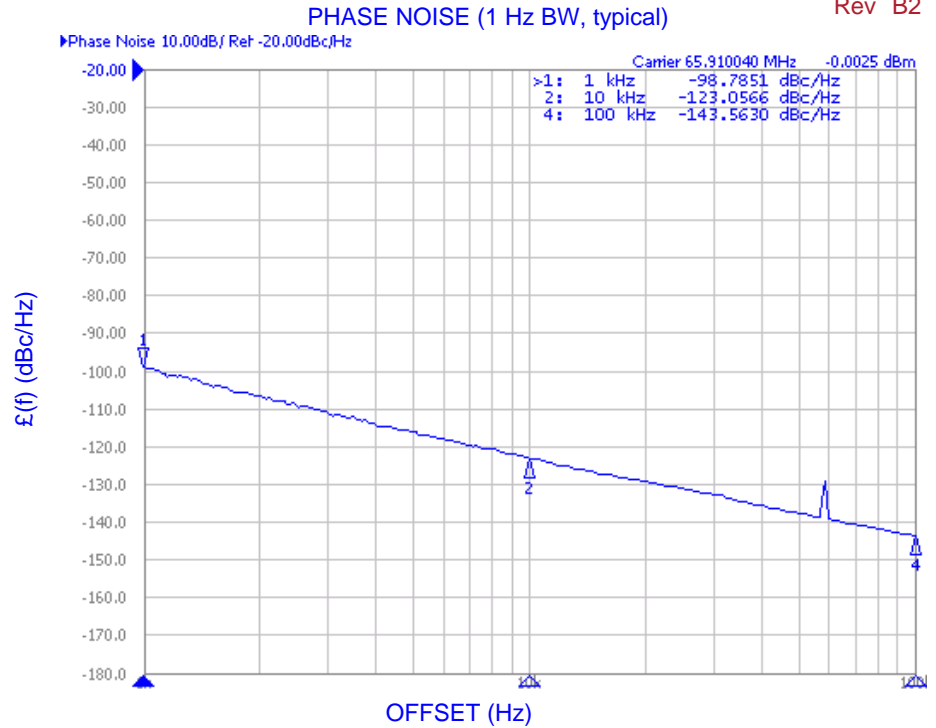

#### Performance Specifications

	Min	Typ	Max	Units
Oscillation Frequency Range	70		76	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-120		dBc/Hz
Harmonic Suppression (2nd)		-18		dBc
Tuning Voltage	1		5	Vdc
Tuning Sensitivity (avg.)		6		MHz/V
Power Output	0	4	8	dBm
Load Impedance		50		$\Omega$
Input Capacitance			1000	pF
Pushing			1	MHz/V
Pulling (14 dB Return Loss, Any Phase)			.5	MHz
Operating Temperature Range	-30		85	$^{\circ}\text{C}$
Package Style		MINI-16		


#### Power Supply Requirements

	Min	Typ	Max	Units
Supply Voltage (Vcc, nom.)		5		Vdc
Supply Current (Icc)		14	17	mA


#### Additional Notes

This VCO is not guaranteed to oscillate when the tuning voltage is below 1 volt.


**Tuning Curve, typ.**

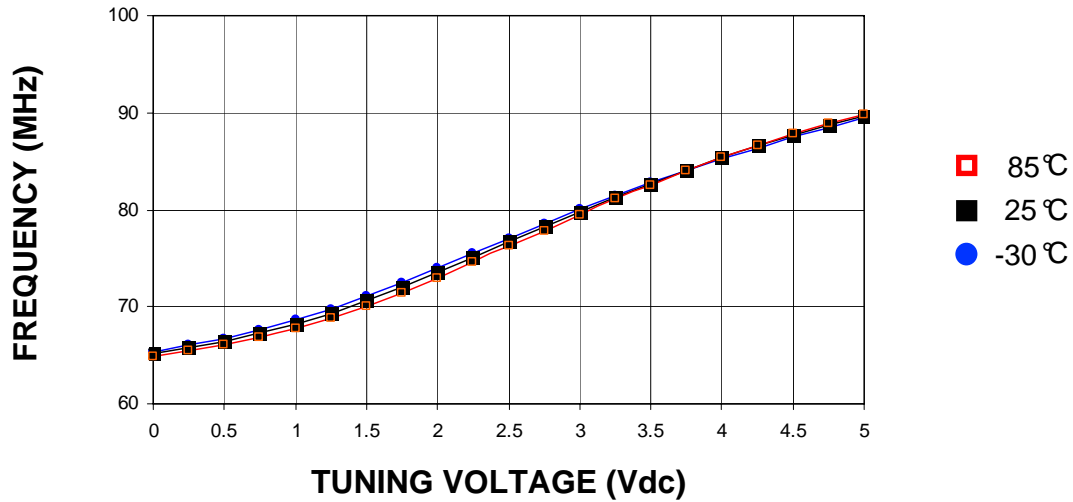

**Power Curve, typ.**

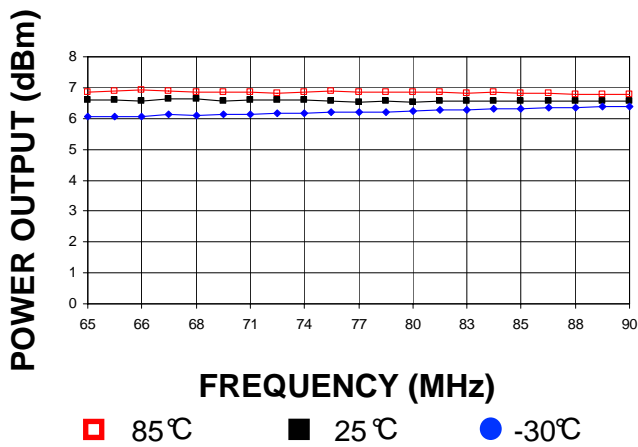

**Footprint**

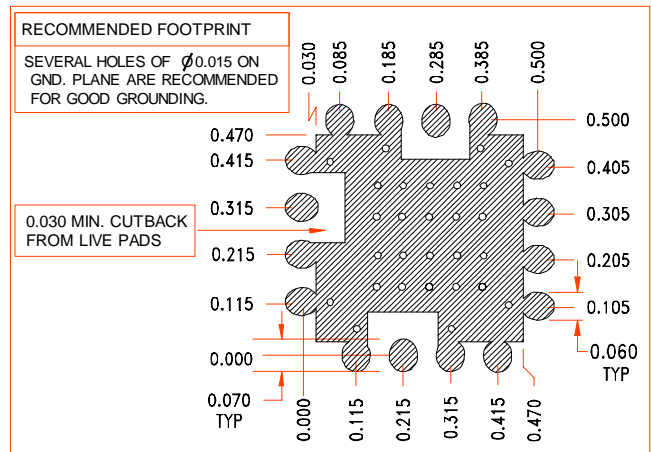

**Physical Dimensions**



LFSuffix = RoHS Compliant. All specifications are subject to change without notice.