

MBRF1535CT Series

PRV : 35 - 60 Volts

Io : 15 Ampere

FEATURES :

- * Dual rectifier construction, positive center tap
- * Metal silicon junction, majority carrier conduction
- * Low power loss, high efficiency
- * For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications


* Pb / RoHS Free

MECHANICAL DATA :

- * Case : Epoxy, Molded
- * Lead Temperature for Soldering Purposes: 260 °C Max. for 10 Seconds
- * Polarity: As marked
- * Mounting Position: Any
- * Weight : 2.24 grams (Approximately)

Dual Schottky Barrier Rectifiers

ITO-220AB

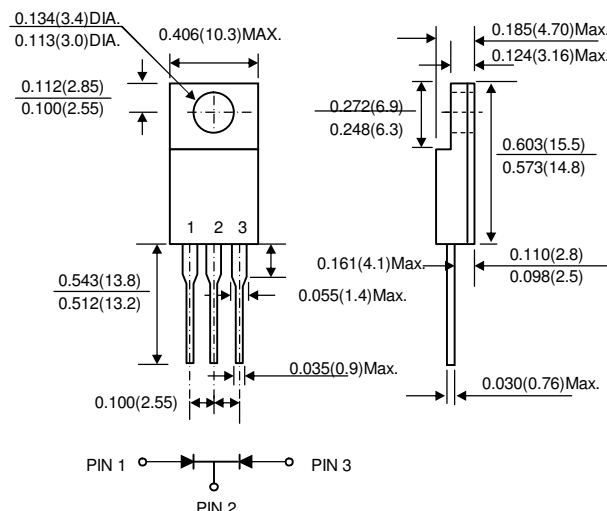

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (Ta = 25 °C unless otherwise specified.)

RATING	SYMBOL	MBRF1535CT	MBRF1545CT	MBRF1550CT	MBRF1560CT	UNIT
Maximum Repetitive Peak Reverse Voltage	VRRM	35	45	50	60	V
Maximum Working peak reverse voltage	VRMS	35	45	50	60	V
Maximum DC Blocking Voltage	VDC	35	45	50	60	V
Maximum Average Forward Current, Tc = 105 °C	IF(AV)	15 (Tatal Device)				A
		7.5 (Per Leg)				
Peak repetitive forward current at TC = 105 °C (rated VR, 20 KHz sq. wave)	IFRM	15				A
Maximum Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at Tc = 100 °C	IFSM	150				A
Maximum Instantaneous Forward Voltage per Leg at IF = 7.5A, Tc =25 °C IF = 7.5A,Tc = 125 °C IF = 15A,Tc = 25 °C IF = 15A, Tc = 125 °C	VF	- 0.57 0.84 0.72	0.75 0.65 - -			V
Maximum Reverse Current per Leg Tc = 25 °C at Rated DC Blocking Voltage Tc = 125 °C	IR	0.1			1.0	mA
	IR(H)	15			50	mA
Maximum Thermal Resistance, Junction to Case	RθJC	5.0				°C/W
Operating Junction Temperature Range	TJ	- 65 to + 150				°C
Storage and Temperature Range	TSTG	- 65 to + 175				°C

RATING AND CHARACTERISTIC CURVES (MBRF1535CT Series)

FIG.1 - FORWARD CURRENT DERATING CURRENT

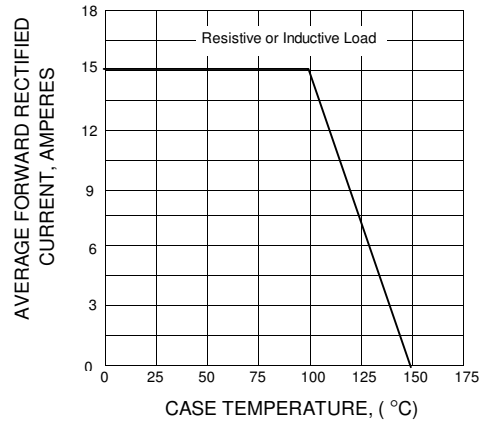


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

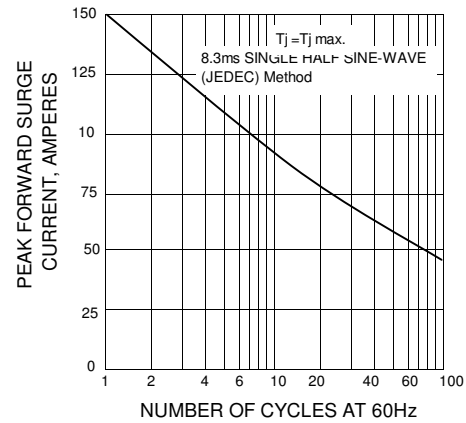


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

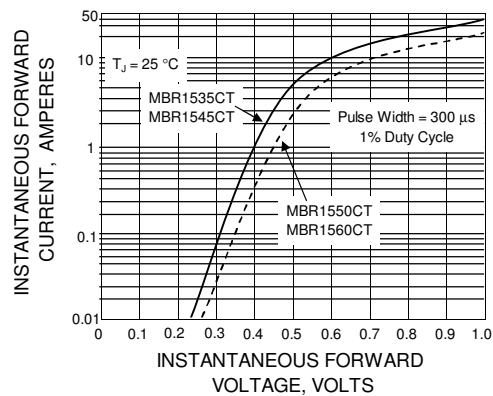


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

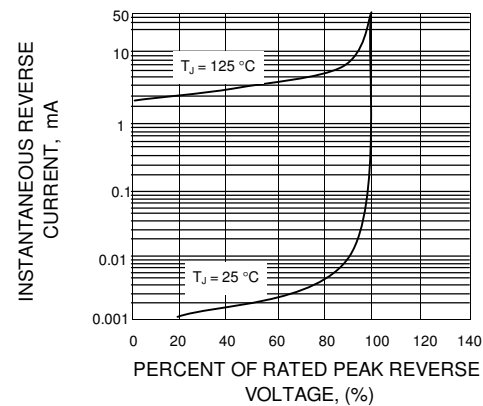


FIG. 5 – TYPICAL JUNCTION CAPACITANCE PER LEG

