

MBRF20200CT

PRV : 200 Volts
Io : 20 Amperes

FEATURES :


- * Highly Stable Oxide Passivated Junction
- * Very Low Forward Voltage Drop
- * Guard-ring for Stress Protection
- * Matched Dual Die Construction
- * High Junction Temperature Capability
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : Epoxy, Molded
- * Lead Temperature for Soldering Purposes:
260°C Max. for 10 Seconds
- * Polarity: As marked
- * Mounting Position: Any
- * Weight : 2.24 grams (Approximately)

DUAL SCHOTTKY BARRIER RECTIFIER

ITO-220AB

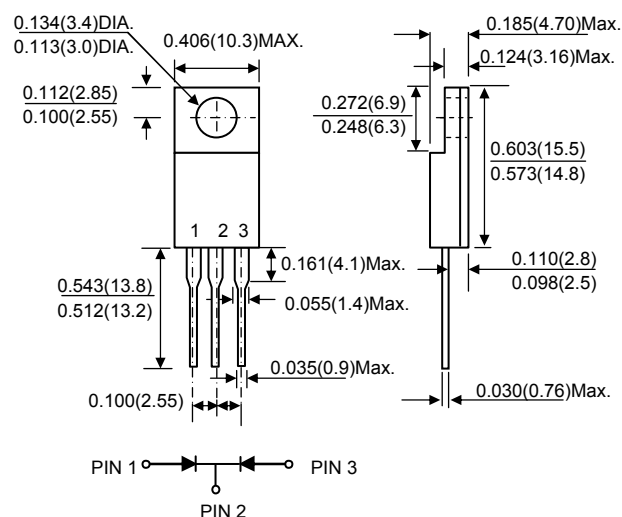


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_c = 25 °C unless otherwise noted)

RATINGS	SYMBOL	VALUE	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	200	V
Maximum Working Peak Reverse Voltage	V _{RWM}	200	V
Maximum DC Blocking Voltage	V _R	200	V
Maximum Average Forward Current (Rated V _R , T _C = 125 °C)	I _{F(AV)}	10 20	A
Peak Repetitive Forward Current per Leg (Rated V _R , Square Wave, 20 kHz, T _C = 90 °C)	I _{FRM}	20	A
Non-Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I _{FSM}	150	A
Maximum Instantaneous Forward Voltage per leg (Note 1) at I _F = 10 A, T _C = 25 °C at I _F = 10 A, T _C = 125 °C at I _F = 20 A, T _C = 25 °C at I _F = 20 A, T _C = 125 °C	V _F	0.9 0.8 1.0 0.9	V
Maximum Reverse Current at Rated DC Blocking Voltage per leg (Note 1)	I _R I _{R(H)}	1.0 50	mA
Capacitance (V _R = -5.0 V, T _C = 25 °C, f =1.0 MHz)	C _T	500	pF
Thermal Resistance, Junction to Case (Per leg)	R _{ΘJC}	3.5	°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	- 65 to + 150	°C

Note : (1) Pulse test : 300 μs pluse width, Duty Cycle ≤ 2%

RATING AND CHARACTERISTIC CURVES (MBRF20200CT)

**FIG.1 - TYPICAL INSTANTANEOUS FORWARD
(PER LEG)**

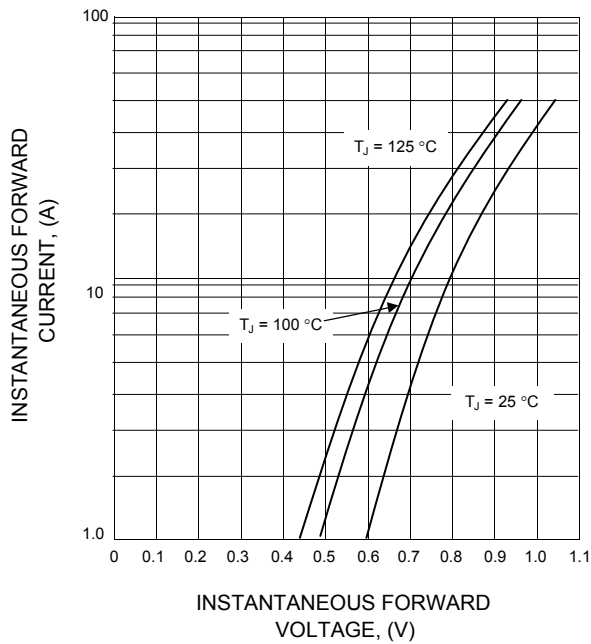

**FIG.2 - TYPICAL REVERSE CHARACTERISTICS
(PER LEG)**

