

RU20A

PRV : 600 Volts

Io : 1.5 Ampere

FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : D2 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.465 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specifie.

Single phase, half wave, 60 Hz, resistive or inductive load.


For capacitive load, derate current by 20%.

RATING	SYMBOL	VALUE	UNIT
Maximum Peak Reverse Voltage	VRM	600	V
Maximum Peak Reverse Surge Voltage	VRSM	650	V
Maximum Average Forward Current	IF(AV)	1.5	A
Maximum Peak Forward Surge Current (50 Hz, Half-cycle, Sine wave, Single Shot)	IFSM	50	A
Maximum Forward Voltage at IF = 1.5 A	VF	1.1	V
Maximum Reverse Current at VR = VRM Ta = 25 °C	IR	10	μA
Maximum Reverse Current at VR = VRM Ta = 100 °C	IR(H)	350	μA
Maximum Reverse Recovery Time (Note 1)	Trr	0.4	μs
Junction Temperature Range	TJ	- 40 to + 150	°C
Storage Temperature Range	TSTG	- 40 to + 150	°C

Note:

(1) Reverse Recovery Test Conditions : IF = 100 mA, IRP = 100 mA.

FAST RECOVERY RECTIFIER DIODE

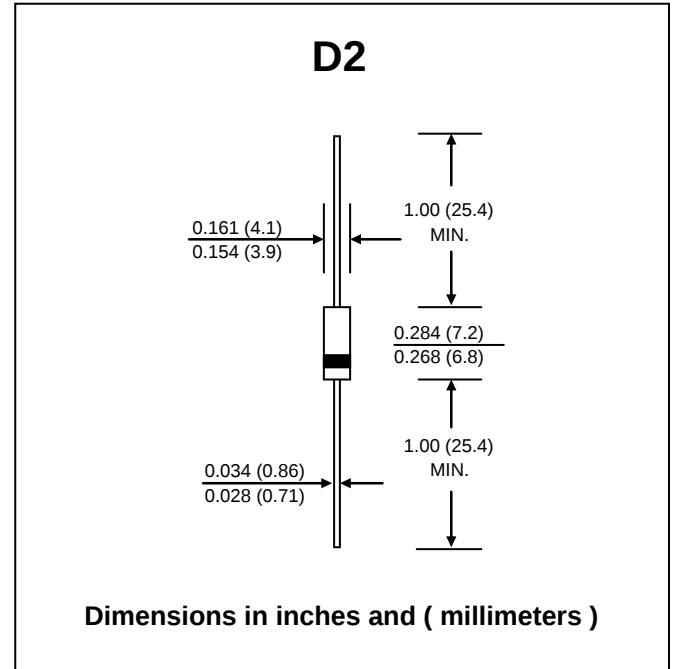

RATING AND CHARACTERISTIC CURVES (RU20A)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

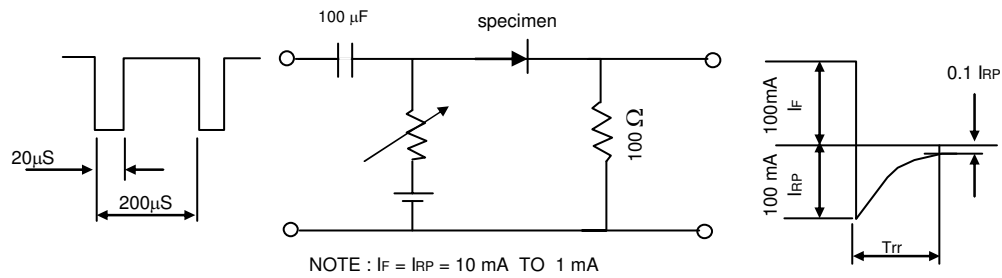


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

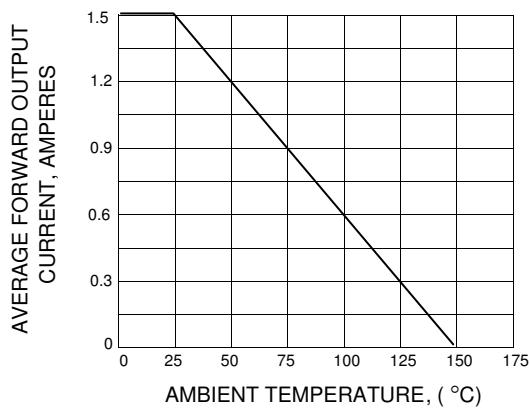


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

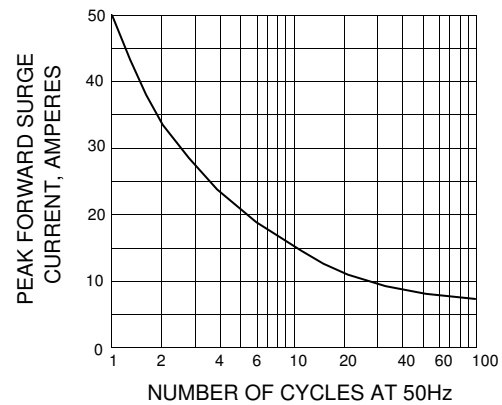


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

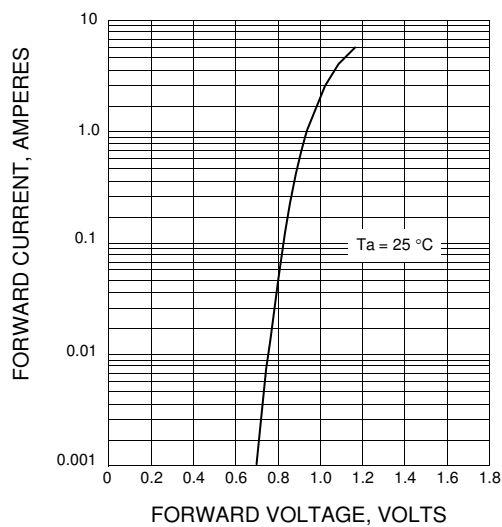


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

