

S5277B/G/J/N

PRV : 100 - 1000 Volts

Io : 1.0 Ampere


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : DO-41 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.339 gram

SILICON RECTIFIER DIODES

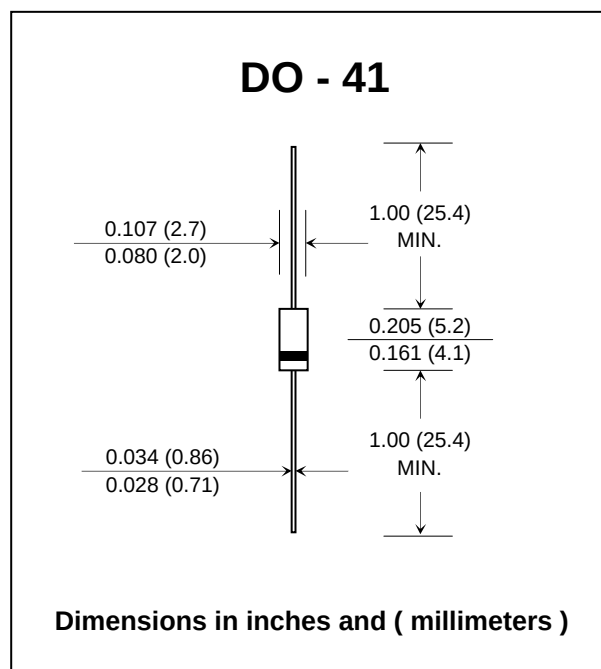

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

RATING	SYMBOL	S5277B	S5277G	S5277J	S5277N	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	400	600	1000	V
Maximum Average Forward Current	$I_{F(AV)}$	1.0				A
Maximum Peak One Cycle Surge Forward Current (Non-Repetitive)	I_{FSM}	(50Hz) 50	(60Hz) 55	(50Hz) 30	(60Hz) 33	A
Peak Forward Voltage at $I_F = 1.0$ A	V_F	1.2				V
Repetitive Peak Reverse Current	I_{RRM}	10				μA
Thermal Resistance (Junction to Ambient)	$R_{th(j-a)}$	120				°C/W
Junction Temperature Range	T_J	- 40 to + 150				°C
Storage Temperature Range	T_{STG}	- 40 to + 150				°C

RATING AND CHARACTERISTIC CURVES (S5277B/G/J/N)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

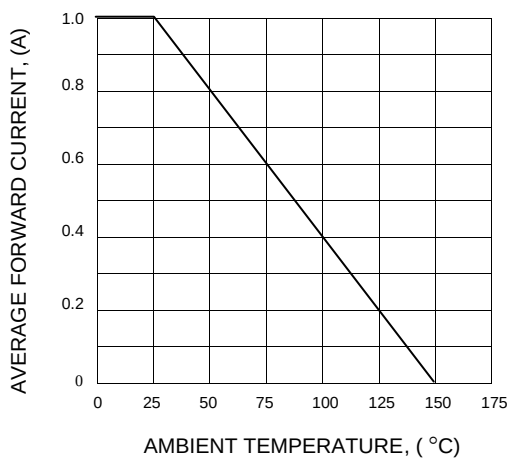


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

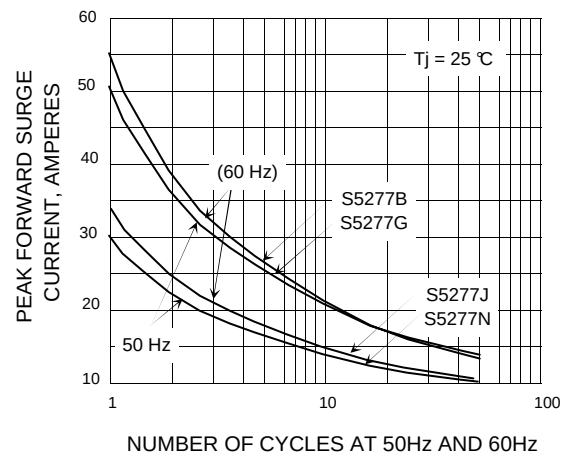


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

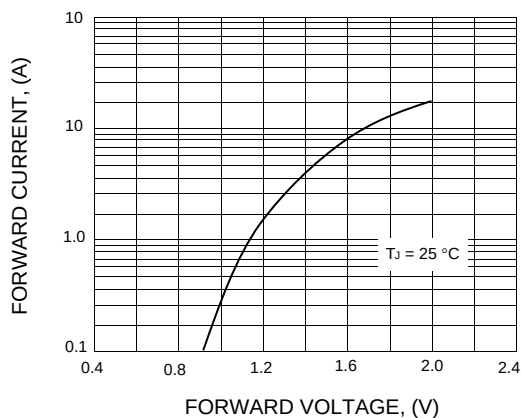


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

