

Low Noise RF Amplifier

- * Operating Frequency : 30-500 MHz
- * Linear Power : +29 dBm
- * Noise Figure : 1.2 dB
- * Gain : 37.5 dB



Description:

ELECTRICAL SPECIFICATION @ VDD= +15VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	30		500	MHz
Gain	G	36	37.5	39	dB
Gain Flatness	Δ G		±0.3	±0.5	dB
Reverse Isolation	S 12		-60		dB
Noise Figure	NF		1.2	1.5	dB
Power Output P1dB	P1dB	27	29		dBm
Output 3rd Order Intercept Point	OIP3	40	44		dBm
VSWR in/out	S11/S22		1.6 :1	2.0 :1	Ratio
Operating Voltage	Vdc		15		Volt
Operating Current	Id		450	500	mA

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	2.5x1x.5		in
RF Connectors IN/OUT	SMA-F		
DC Connector	Filtered DC		
Cooling	None		

PROTECTIONS

RF Input Power	+ 5 dBm Max	
Reverse Polarity Protection	Optional	
Load VSWR		
Stability	100%	

ENVIROMENTAL CHARACTERISTICS


Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0		50°C	°C
Storage Temperature	Tstg	-40		100°C	°C

3009 Old State Rd, Telford, PA 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

Outline Drawing

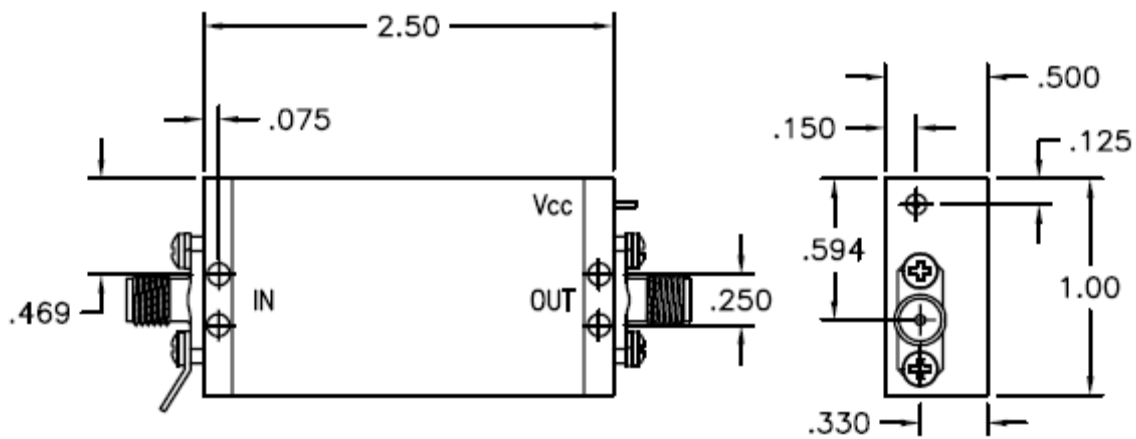

3009 Old State Rd, Telford, PA 18969

Web: www.amplifiersolutions.com
Email: sales@amplifiersolutions.com

Tel: 215-799-2561
Fax: 215-799-2563