

M·C·C·

Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

**1N60
1N60P**

Features

- High Reliability
- Low Reverse Current and Low Forward Voltage
- Marking : Cathode band and type number
- Lead Free Finish/Rohs Compliant (Note1) ("P"Suffix designates Compliant. See ordering information)
- Moisture Sensitivity Level 1

Maximum Ratings

- Storage & Operating Junction Temperature: -65°C to +125°C


Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Symbol	Type	Value	Test Condition
Repetitive Peak Reverse Voltage	V_{RRM}	1N60	40V	
		1N60P	45V	
Average Forward Current	$I_{F(AV)}$	1N60	30mA	$T_a = 25^\circ\text{C}$
		1N60P	50mA	$T_a = 25^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	1N60	150mA	$t_p \leq 1\text{ s}$
		1N60P	500mA	$t_p \leq 1\text{ s}$
Junction Ambient	R_{thJA}		250K/W	On PC board 50mm × 50mm × 1.6mm

Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 7(C)-I.

Schottky Barrier Rectifier

DO-35

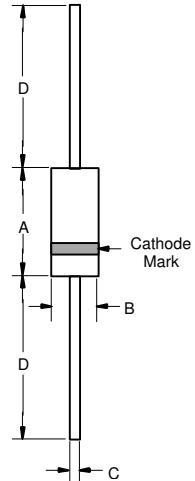

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.166	---	.42	
B	---	.079	---	2.00	
C	---	.020	---	.52	
D	1.000	---	25.40	---	

www.mccsemi.com

Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Test Conditions	Type	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F=1\text{mA}$	1N60	V_F	---	0.32	0.5	V
		1N60P	V_F	---	0.24	0.5	V
	$I_F=30\text{mA}$	1N60	V_F	---	0.65	1.0	V
	$I_F=200\text{mA}$	1N60P	V_F	---	0.65	1.0	V
Reverse current	$V_R=15\text{V}$	1N60	I_R	---	0.1	0.5	μA
		1N60P	I_R	---	0.5	1.0	μA
Junction capacitance	$V_R=1\text{V}, f=1\text{MHz}$	1N60	C_J	---	2.0	---	pF
	$V_R=10\text{V}, f=1\text{MHz}$	1N60P	C_J	---	6.0	---	pF
Reverse recovery time	$I_F=I_R=1\text{mA}, I_{rr}=1\text{mA}$ $R_C=100\Omega$		t_{rr}	---	---	1.0	ns



TM

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 10Kpcs/Reel
Part Number-AP	Ammo Packing: 5Kpcs/ Am m oBox
Part Number-BP	Bulk: 100Kpcs/Carton

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.