



Micro Commercial ComponentsTM

MICRO COMMERCIAL COMPONENTS CORP.

Document Type	Subject	Document No.	Open Date
Part Number Change Notice	CMDSH-3-TP Part Number Change Notification	PCN_120809	Sept. 5th, 2009
<p>1. Purpose : Benefit our customer to select our devices easier .</p> <p>Enable MCC's Part Number to accord with Industrial Part Number;</p> <p>2. Range : CMDSH-3-TP</p> <p>3. Operation Explanation : MCC will change the pn# CMDSH-3-TP to SD107WS-TP and effective from 2009/12/1.</p>			

****The patent belongs to Micro Comercial Components Corp., Pls don't copy unless permission****



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

CMDSH-3

Features

- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Case Material:Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Low Turn-on Voltage
- Fast Switching
- Ultra-Small Surface Mount Package
- PN Junction Guard Ring for Transient and ESD Protection

Schottky Diode

Maximum Ratings


Symbol	Parameter	Rating	Unit
V_{RM}	Non-Repetitive Peak Reverse Voltage	30	V
V_R	DC Blocking Voltage	21	V
I_O	Average Rectified Output Current	100	mA
I_{FSM}	Peak Forward Surge Current	750	mA
R_{JA}	Thermal Resistance Junction to Ambient	500	/W
P_D	Power dissipation	250	mW
T_J	Junction Temperature	125	
T_{STG}	Storage Temperature	-65 to +150	

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Test Conditions
$V_{(BR)}$	Reverse Breakdown Voltage	30V		$I_R=100 \mu A$
I_R	Reverse Voltage Leakage Current		1.0 μA	$V_R=25V$
V_F	Forward Voltage	.30V .36V	.55V .80V	$I_F=2mA$ $I_F=15mA$ $I_F=50mA$ $I_F=100mA$
C_T	Total Capacitance		7pF	$V_R=10V, f=1MHz$


Marking: S1

SOD-323

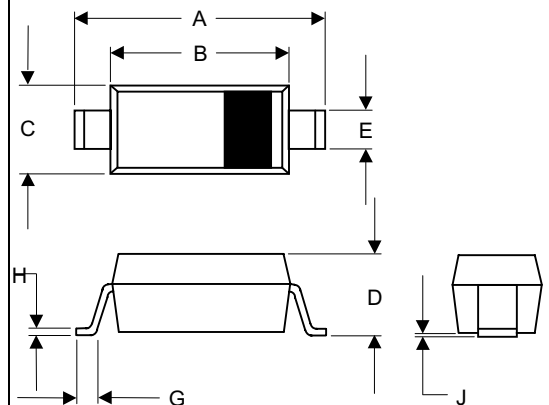

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.090	.107	2.30	2.70	
B	.063	.071	1.60	1.80	
C	.045	.053	1.15	1.35	
D	.031	.045	0.80	1.15	
E	.010	.016	0.25	0.40	
G	.004	.018	0.10	0.45	
H	.004	.010	0.10	0.25	
J	-----	.006	-----	0.15	

SUGGESTED SOLDER PAD LAYOUT

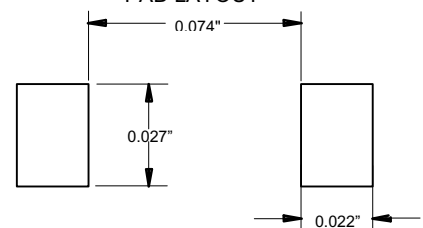



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com