

LL48

Small Signal Schottky Diode

Features

- Fast Switching Speed and Low Turn-on Voltage
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates Compliant. See ordering information)

Mechanical Data

- Case: Minimelf, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Indicated by Cathode Band
- Weight: 0.05 grams (approx.)

Maximum Ratings @25°C Unless Otherwise Specified


Characteristic	Symbol	Value	Unit
Peak Reverse Voltage	V_{RRM}	40	V
Forward Continuous Current(Note2)	I_F	350	mA
Surge Forward Current @ $t_p < 10ms$, $T_A=25^\circ C$	I_{FSM}	7.5	A
Power Dissipation(Note 2)	P_{tot}	330	mW
Thermal Resistance(Note 2)	$R_{\theta JA}$	300	K/W
Operation Temperature Range	T_A	-55 to 125	°C
Storage Temperature Range	T_{STG}	-55 to 150	°C

Electrical Characteristics @25°C Unless Otherwise Specified

Charateristic	Symbol	Min	Typ.	Max	Unit	Test Cond.
Reverse Breakdown Volt.	$V_{(BR)R}$	40	-----	-----	V	100uA pulse
Reverse Leakage Current.	I_R	-----	-----	2 15 5 25 25 50	uA	$V_R=10V$ $V_R=10V, T_J=60^\circ C$ $V_R=20V$ $V_R=20V, T_J=60^\circ C$ $V_R=40V$ $V_R=40V, T_J=60^\circ C$
Forward Volt. Drop	V_F	-----	-----	0.25 0.45 0.90	V	$I_F=0.1mA$ $I_F=10mA$ $I_F=250mA$
Junction Capacitance	C_{tot}	-----	2.0	-----	pF	$V_R=1V, f=1MHz$


- Note:** 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.
2. Valid provided that electrodes are kept at ambient temperature

MINIMELF

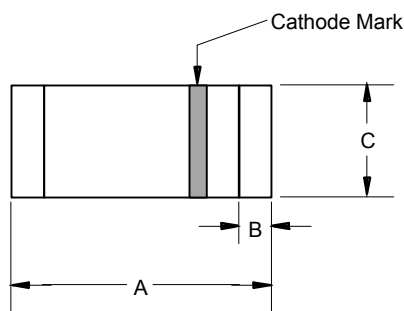

DIM	DIMENSION				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.130	.146	3.30	3.70	
B	.008	.016	0.20	0.40	
C	.055	.059	1.40	1.50	

SUGGESTED SOLDER PAD LAYOUT

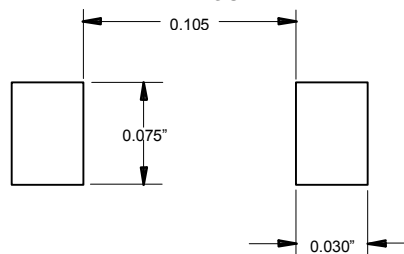

LL48

Figure 1. Forward current versus forward voltage at different temperatures (typical values)

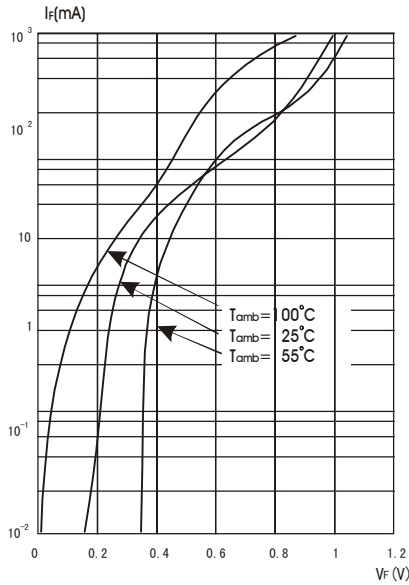


Figure 2. Forward current versus forward voltage (typical values)

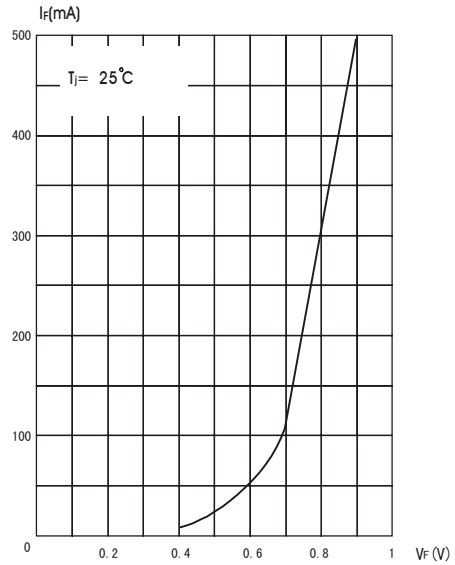


Figure 3. Reverse current versus ambient temperatures

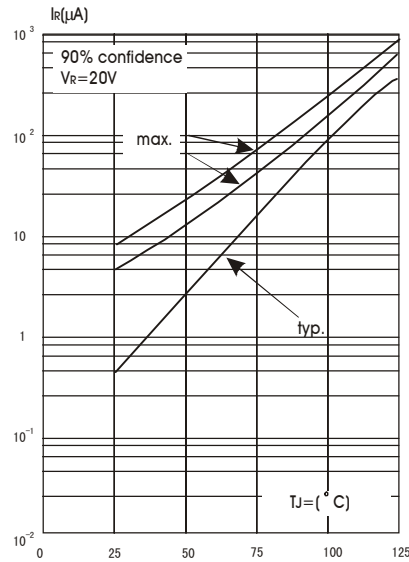


Figure 4. Reverse current versus continuous Reverse voltage (typical values)


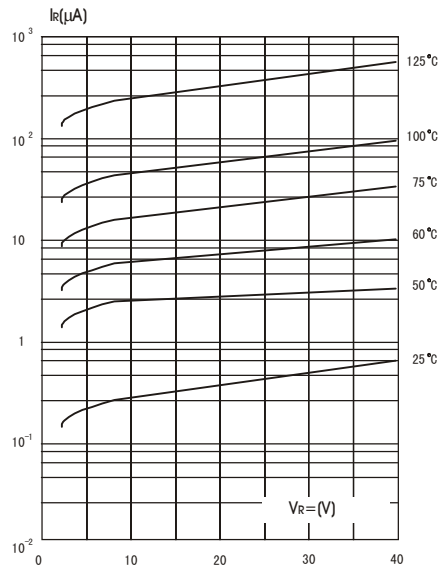


Figure 5. Capacitance C versus reverse applied voltage V_R (typical values)



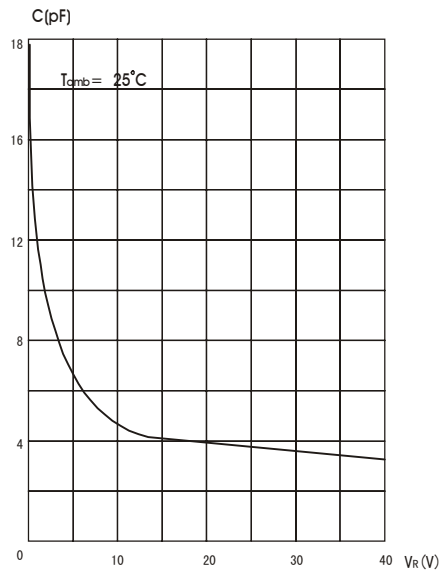

TM

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 2.5Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com