


STANDARD
1A TRIACs
■ MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	1	A
$V_{(DRM)}/V_{RRM}$	600 to 800	V
$I_{GT(Q1)}$	3 to 25	mA

■ GENERAL DESCRIPTION

The MAC97A8 series is suitable for general purpose AC switching applications. They can be found in applications such as home appliances (electro-valve, pump, door lock, small lamp control), fan speed controllers,

Different gate current sensitivities are available, allowing optimized performances when controlled directly from micro-controllers.

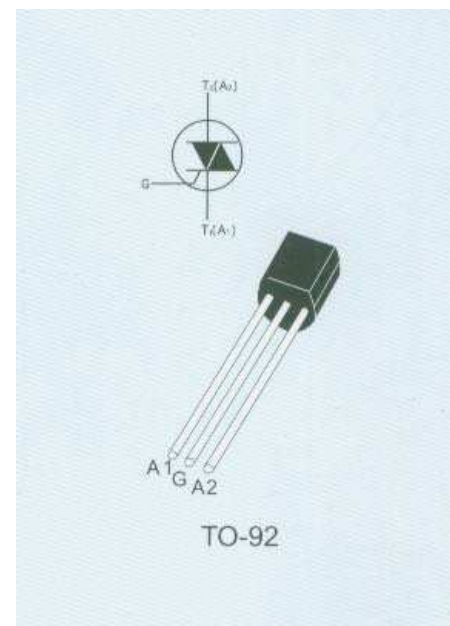
■ ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter			Value	Unit
$I_{T(RMS)}$	RMS on-state current (full sine wave)	TO-92	$T_c=50^\circ\text{C}$	1	A
I_{TSM}	Non repetitive surge peak on-state current (full cycle, T_j initial= 25°C)	F=50Hz	t=20ms	8	A
		F=60Hz	t=16.7ms	8.5	
I^2T	I^2T Value for fusing	tp=10ms		0.35	A^2s
dl/dt	Critical rate of rise of on-state current $I_G=2 \times I_{GT}$, $t_r \leq 100\text{ns}$	F=120Hz	$T_j=125^\circ\text{C}$	20	$\text{A}/\mu\text{s}$
I_{GM}	Peak gate current	tp=20 μs	$T_j=125^\circ\text{C}$	1	A
$P_{G(AV)}$	Average gate power dissipation	$T_j=125^\circ\text{C}$		0.1	W
T_{stg}	Storage junction temperature range			-40 to+150	$^\circ\text{C}$
T_j	Operating junction temperature range			-40 to+125	

■ STATIC CHARACTERISTICS
 $T_j=25^\circ\text{C}$ unless otherwise stated

Symbol	Test Conditions	Quadrant		Value		Unit
				Typ	Max	
$I_{GT}^{(1)}$	$V_D=12\text{V}$ $R_L=30\Omega$	I-II-III		5	10	mA
		IV		7	10	
V_{GT}		ALL	MAX.	1.5		V
V_{GD}	$V_D=V_{DRM}$ $R_L=3.3\text{K}\Omega$ $T_j=125^\circ\text{C}$	ALL	MIN.	0.2		V
$I_H^{(2)}$	$I_T=50\text{mA}$		MAX.	10	25	mA
I_L	$I_G=1.2I_{GT}$	I-III-IV	MAX.	10	25	mA
		II		20	50	
$V_{TM}^{(2)}$	$I_{TM}=1.4\text{A}$ $t_p=380\mu\text{s}$	$T_j=25^\circ\text{C}$	MAX.	1.6		V
$V_{T0}^{(2)}$	Threshold voltage	$T_j=125^\circ\text{C}$	MAX.	0.95		V
$R_d^{(2)}$	Dynamic resistance	$T_j=125^\circ\text{C}$	MAX.	400		$\text{m}\Omega$
I_{DRM} I_{RRM}	$V_{DRM}=V_{RRM}$	$T_j=25^\circ\text{C}$	MAX.	50		μA
		$T_j=125^\circ\text{C}$		0.5		mA

■ DYNAMIC CHARACTERISTICS

Symbol	Test Condition		Typ	Max	Unit
$dV/dt^{(2)}$	$V_D=67\%$ V_{DRM} gate open $T_j=110^\circ\text{C}$	MIN	50	100	$\text{V}/\mu\text{s}$
$(dV/dt)_c^{(2)}$	$(dI/dt)_c=0.44\text{A}/\text{ms}$ $T_j=110^\circ\text{C}$	MIN	2	5	$\text{V}/\mu\text{s}$

Note1: minimum I_{GT} is guaranteed at 5% of I_{GT} max.

Note2: for both polarities of A2 referenced to A1.

■ THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
$R_{th(j-l)}$	Junction to lead (AC)	TO-92	60	$^\circ\text{C}/\text{W}$
$R_{th(j-a)}$	Junction to ambient	TO-92	150	$^\circ\text{C}/\text{W}$

PERFORMANCE CURVES

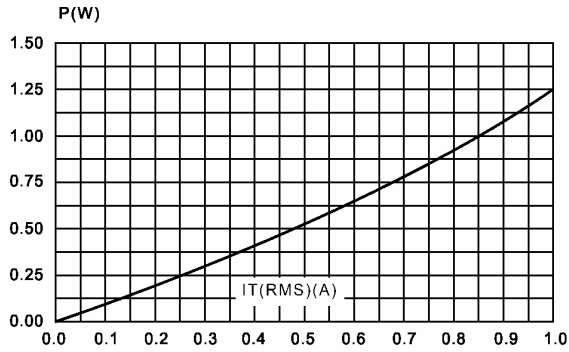


Fig. 1. Maximum power dissipation versus RMS on-state current (full cycle)

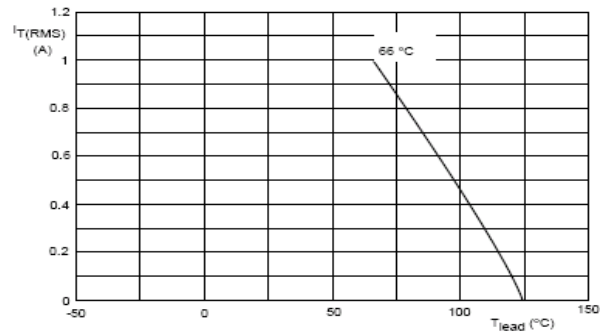


Fig. 4. RMS on-state current versus ambient temperature (full cycle)

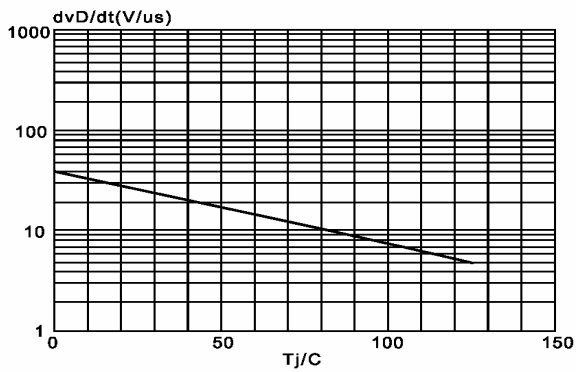


Fig. 2. Typical, critical rate of rise off-state voltage, dv_D/dt versus junction temperature T_j

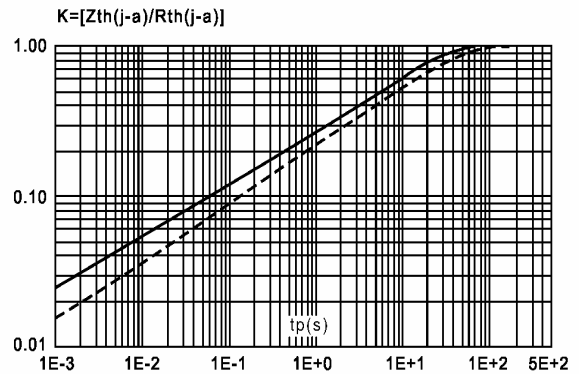


Fig. 5. Relative variation of thermal impedance junction to ambient versus pulse duration

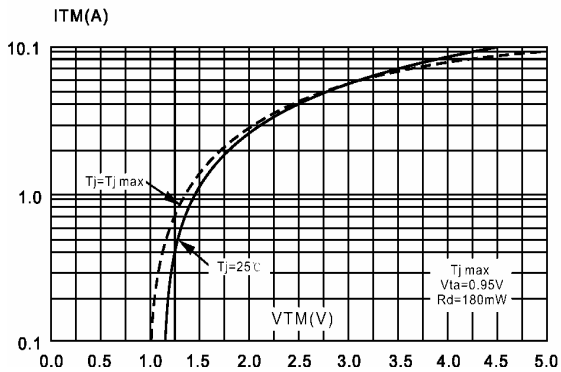


Fig. 3. On-state characteristics (maximum values),

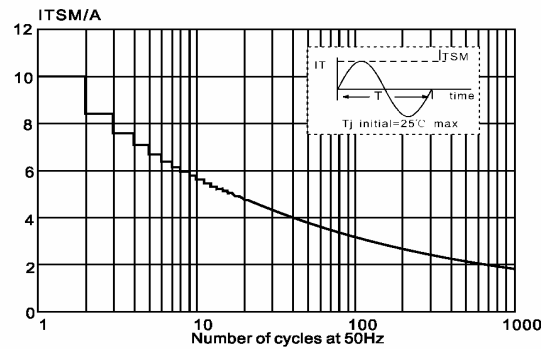


Fig. 6. Maximum permissible non-repetitive peak on-state current I_{TSM} versus number of cycles, for sinusoidal currents, $f=50\text{Hz}$

PERFORMANCE CURVES

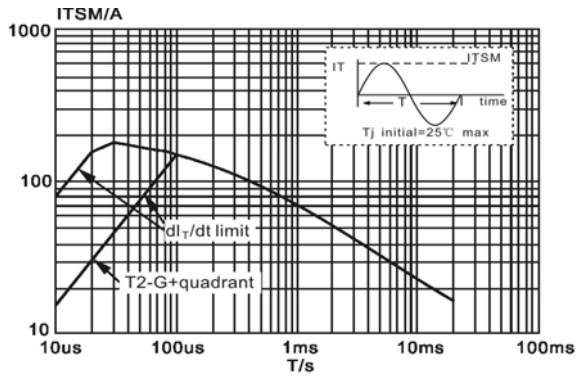


Fig. 7. Maximum permissible non-repetitive peak on-state current I_{TSM} versus pulse width t_p , for sinusoidal currents, $t_p \leq 20ms$

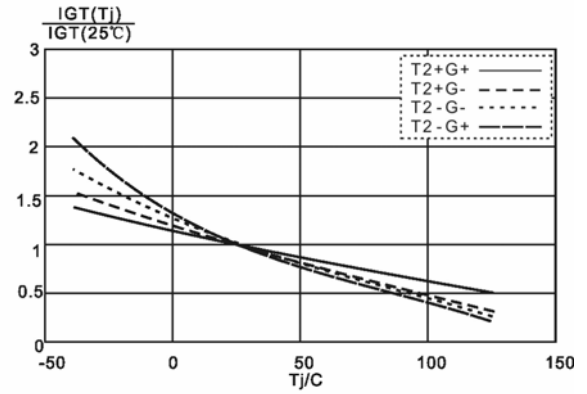


Fig. 10. Normalized gate trigger current $I_{GT}(T_j)/I_{GT}(25^\circ C)$, versus junction temperature T_j

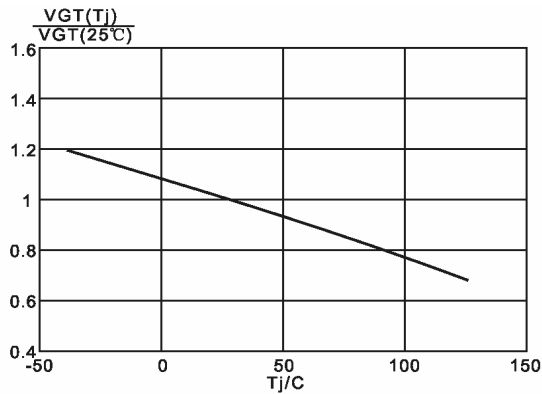


Fig. 8. Normalized gate trigger voltage $V_{GT}(T_j)/V_{GT}(25^\circ C)$, versus junction temperature T_j

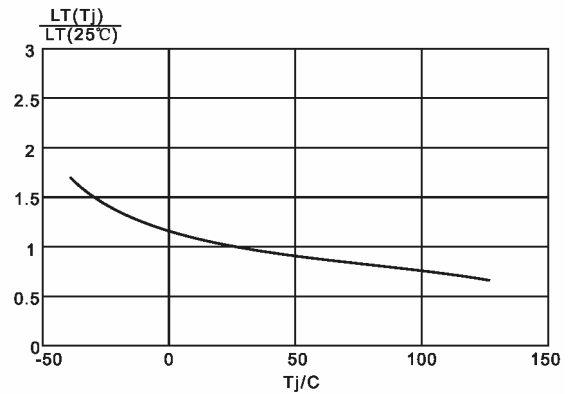


Fig. 11. Normalized latching current $I_L(T_j)/I_L(25^\circ C)$, versus junction temperature T_j

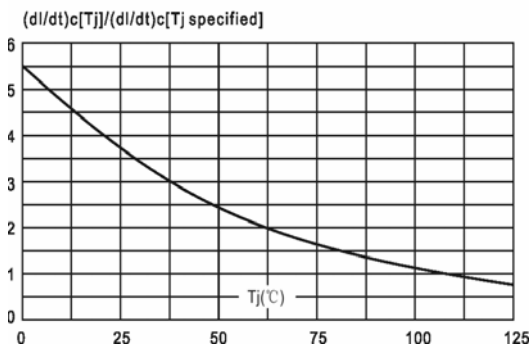


Fig. 9. Relative variation of critical rate of decrease of main current versus junction temperature T_j


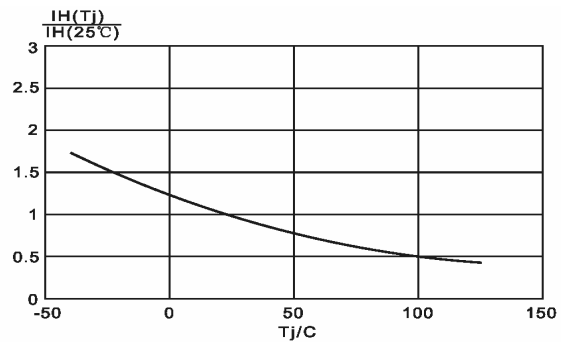


Fig. 12. Normalized holding current $I_H(T_j)/I_H(25^\circ C)$, versus junction temperature T_j

PACKAGE MECHANICAL DATA

TO-92(Plastic)

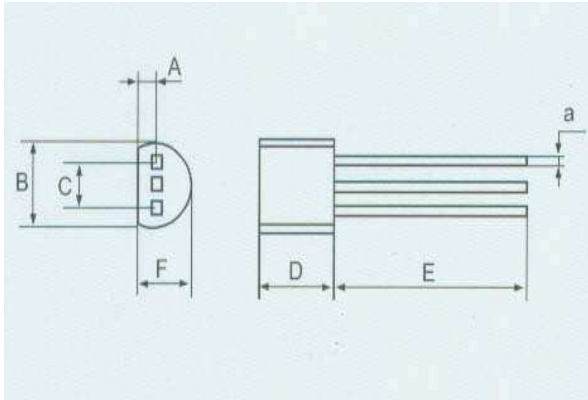

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		1.35			0.053	
B			4.70			0.185
C		2.54			0.100	
D	4.40			0.173		
E	12.70			0.500		
F			3.70			0.146
a			0.45			0.017