


# RocketRAID 2680

## 8 Channel PCI-Express x4 SAS RAID Controller

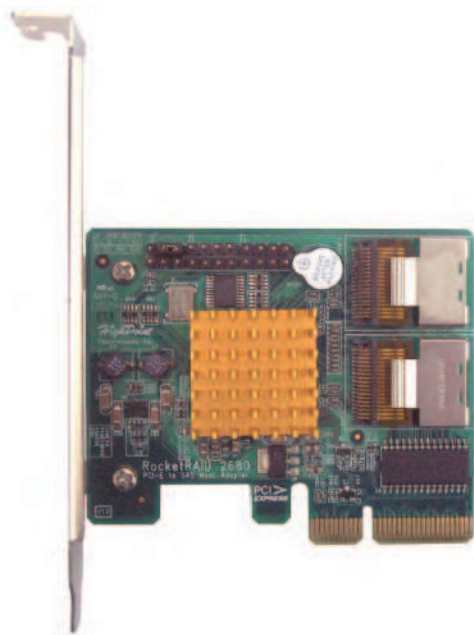

### Host Adapter Architecture

- PCI-Express x4
- 8 Internal SAS/SATA 3Gb/s Device Ports
- Direct Connect up to 8 3Gb/s SAS or SATA Hard Drives
- NCQ (Native Command Queuing)
- Low Profile
- RoHS complaint

### Advance RAID Features

- Support RAID 0, 1, 5, 10,50 and JBOD
- Multiple RAID support
- Multiple Logical Drive Support
- Write Through / Write Back Support
- BIOS booting support
- BIOS PnP and BBS (BIOS boot specification) support
- Online array roaming
- Online capacity expansion (OCE) and Online RAID level migration (ORLM)
- Quick and Background initialization for instant RAID configuration
- Automatic drive insertion / removal detection and rebuild
- 64bit LBA support greater than 2TB per volume
- S.M.A.R.T monitoring hard drive stability
- Staggered Spin up

### Array Monitors, Alerts and Indicators

- Active/Failed LED
- SMTP for email notification
- Alarm/Buzzer alerts for drive failure
- SAF-TE (I2C) and SGPIO enclosure management

### RAID Management

- TerabyteGuard™ for data protection
- BIOS update in the Operating System
- Hot key (ctrl-h) boot-up RAID manager via BIOS
- API library for customizing AP
- Command Line Interface (CLI)
- Web browser-base RAID management software
- Disk scrubbing to prevent degraded RAID arrays
- Bad sector repair and remapping to reduce dropped drives

### Operating System Support

- Windows (2000, XP, 2003 and Vista capable),
- Linux
- FreeBSD

# RocketRAID 2680

## 8 Channel PCI-Express x4 SAS RAID Controller

### RocketRAID 2680 HOST ADAPTER

The RocketRAID 2680 is a high-performance SAS RAID solution, delivering reliability to demanding data-intensive applications such as tiered storage environments (disk-to-disk), security and surveillance, video editing, and digital content creation. Support for both SAS and SATA 3Gb/s drives on the same controller maintains configuration optimization for performance based on the characteristics of SAS and SATA drives available today.

HighPoint RAID Management HighPoint RAID Management software offers a user friendly interface to create, manage and maintain your storage solutions. Email notification and remote are some of the advance features that the RAID Management software has to offer.

### COMPREHENSIVE OS SUPPORT

HighPoint offers the broadest range of support for all major operating systems to ensure OS and hardware server compatibility. Drivers are available for all major operating systems, including Windows , Linux, Mac OS X and FreeBSD.

### PHYSICAL SPECIFICATIONS

Size: 65mm x 79.3mm

EMI : FCC Part 15 Class B and CE

#### Thermal and Atmospheric Characteristics:

Work Temperature Range : +5°C ~+ 55°C

Relative Humidity Range : 5% ~ 60% non condensing

Storage Temperature : ~20 ~ 80 °C

MTBF: 920,585 Hours

#### Electrical Characteristics:

PCI-e	12 V	3.3V
Power	6W max	0.5W max

### RocketRAID 2680 Specification

Host Side Interface	PCI- Express x4 (x8 and x16 slot compatible)
Device Interface	3Gbps SAS or SATA Channels
Number of Channels	8 SATA/SAS Channels
Supported RAID Levels	RAID 0, 1, 5, 10, 50 and JBOD
Operating Systems Support	Windows, Linux, FreeBSD
RAID Management Tool	BIOS Web based RAID

### Company Information

#### U.S. Headquarter

Address: 1161 Cadillac Court, Milpitas, CA 95035  
Phone: 1-408-942-5800  
Fax: 1-408-942-5801  
E-mail: sales@highpoint-tech.com  
Support: support@highpoint-tech.com

#### HighPoint Taiwan

Address: 5F, NO.3, Sweil Lane, Jungjeng Rd., Shindian City, Taipei, Taiwan 231, R.O.C.  
Phone: +886-2-2218-3435  
Fax: +886-2-2218-3436  
E-mail: sales@highpoint-tech.com  
Support: support@highpoint-tech.com

#### HighPoint China

Address: No. 12, Zhong Guan Cun South Rd, Beijing, China  
Phone: +86-10-62130920  
Fax: +86-10-68975074  
E-mail: sales@highpoint-tech.cn  
Support: support@highpoint-tech.cn



Product pictures and specifications are subject to change without notice.  
All trademarks are the property of their respective holders.  
Copyright © 2008 by HighPoint Technologies, Inc.

three limited warranty information