


**Actuator/sensor cable, PUR  
extension cable  
WKC4.4T-0,3-RSC4.4T/TXL**

**TURCK**

Industrial  
Automation

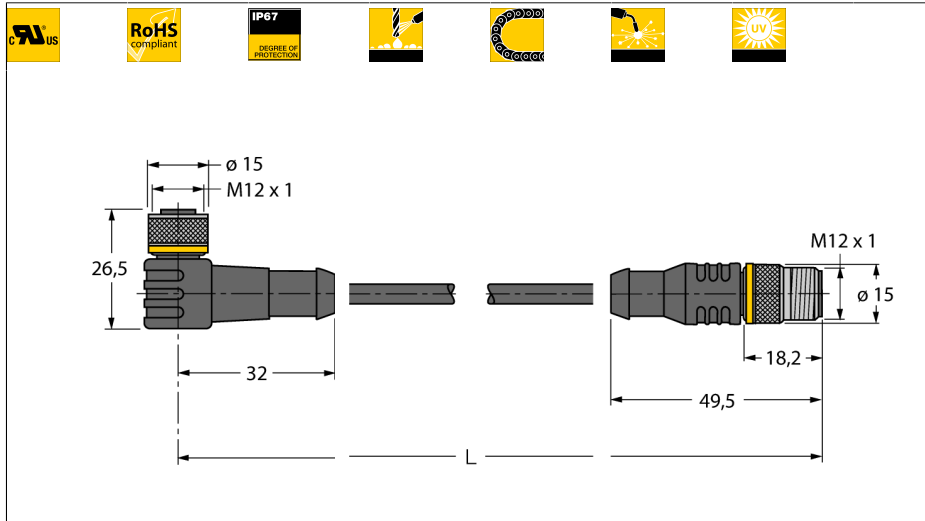

- Female M12, angled, 4-pin
- Male M12, straight, 4-pin
- Sheath material: PUR
- Sheath color: black
- Qualified for drag chain use
- Weld-splatter resistant
- Resistant to chemicals, UV radiation and oils
- Flame retardant
- Free from halogen, silicone, PVC and LABS
- Approval: cULus
- RoHS conform
- Protection class IP67
- Cable length: 0.3 m

**Type code** WKC4.4T-0,3-RSC4.4T/TXL  
**Ident no.** 6625637


**Connector A side**  
Number of pins female connector, M12 x 1, angled  
4  
Contacts metal, CuZn, gold-plated  
Contact carriers plastic, TPU, black  
Grip plastic, TPU, black  
Coupling nut/screw metal, CuZn, nickel-plated  
Coupling nut/screw metal  
Protection class IP67, only in screwed state  
Mechanical lifespan > 100 mating cycles  
Pollution degree 3  
Tightening torque 0.8 ... 1 Nm  
(observe max. value of counter piece!)

**Connector B side**  
Number of pins male connector, M12 x 1, straight  
4  
Contacts metal, CuZn, gold-plated  
Contact carriers plastic, TPU, black  
Grip plastic, TPU, black  
Coupling nut/screw metal, CuZn, nickel-plated  
Coupling nut/screw metal  
Protection class IP67, only in screwed state  
Mechanical lifespan > 100 contact durability  
Pollution degree 3  
Tightening torque 0.8 ... 1 Nm  
(observe max. value of counter piece!)

**General data**  
Cable diameter Ø 4.7 mm +/-0.20  
Cable length 0.3 m  
Sheath color PUR (black)  
Core insulation (colors) PP (BN, WH, BU, BK)  
Core cross-section 4x0.34mm<sup>2</sup>  
Litz wire arrangement 42x0.1 mm

**Electrical features at +20 °C**  
Rated current 4 A  
Rated voltage [U<sub>max</sub>] 250 V  
Insulation resistance > 1 GΩ x km  
Test voltage 2000 V  
Forward resistance max. 57.5 Ω/km

**Pin assignment**

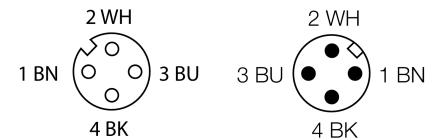

**circuit diagram**



**Actuator/sensor cable, PUR  
extension cable  
WKC4.4T-0,3-RSC4.4T/TXL**

**TURCK**

Industrial  
Automation

---

**Mechanical and chemical properties**

Max. tensile strength (static)	≤ 50 N/mm <sup>2</sup>
Max. tensile strength (dynamic)	≤ 20 N/mm <sup>2</sup>
bending cycles	> 5 mil.
Static Bending Radius	> 5 x Ø
Bending radius (flexible use)	> 10 x Ø
Admissible acceleration	max. 5 m/s <sup>2</sup>
Admissible travel path, horizontal	5 m (at 5 m/s <sup>2</sup> )
Admissible travel path, vertical	2 m (at 5 m/s <sup>2</sup> )
Admissible traversing speed	3.3 m/s
Torsional stress	± 180 °/m
Ambient temperature	
at rest	-50 ... 80°C
In moving state	-25 ... 80°C
drag chain operation	-25 ... 60°C