


Industrial sensor cable
PTFE cable sheath
HT-WAK4.5-10/S2430


TURCK

Industrial
Automation

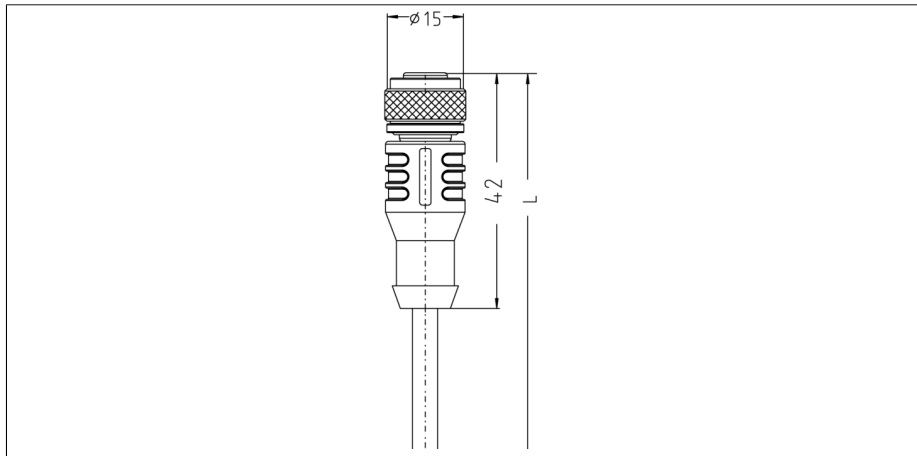

- Ready-made and overmoulded connection cable
- Protection class IP65
- For use in high-temperature applications
- Other cable lengths available
- PTFE cable

Wiring diagram



1: BN 4: BK
 2: WH 5: GY
 3: BU

Cable quality S2430

This cable is thermally stable in a range between -190 °C to +260 °C. Thanks to the fully fluorinated sheath and conductor insulation, it can also be deployed as a high-frequency cable, as control line in temperature critical areas and also in the computer and aerospace industry. It is also highly resistant to chemicals, ozone and weather conditions.

Type code	HT-WAK4.5-10/S2430
Ident no.	8039213
Connector A side	female connector, M12 x 1, axial
Number of pins	5
Contacts	metal, CuZn, gold-plated
Contact carriers	plastic, PBT GF, black
Grip	plastic, PBT GF, black
Coupling nut/screw	metal, CuZn, nickel-plated
Seal	plastic, FPM/FKM
Mechanical lifespan	> 100 mating cycles
Pollution degree	3
Cable	S2430, Li5Y5Y-OB
Cable diameter	3.8 mm
Cable length	10m
Cable sheath	PTFE, WH
Core insulation	PTFE
Core colors	BN, BK, BU, GY, WH
Core cross-section	5x0.34mm ²
Litz wire arrangement	7x0.254 mm
Bending radius (mobile)	min. 10 x Ø cable
Rated voltage [Umax]	60 V
Insulation resistance	≥ 10 ⁶ Ω
Ampacity	Max. 4 A
Forward resistance	≤ 5 mΩ
Ambient temperature Connector	-20... +150°C
Cable ambient temperature	-190... +260°C