



Power cable for CAN (DeviceNet™, CANopen)
PUR cable jacket, 4-pole
WKM43-10M


- Power cable: 4 x 1.5 mm²)
- PUR jacket, grey
- Jacket diameter: 7.5 mm
- Qualified for drag chain use
- Oil-resistant and flame-retardant
- Halogen-free
- Open end
- 7/8" female, angled
- Cable length: 10 m

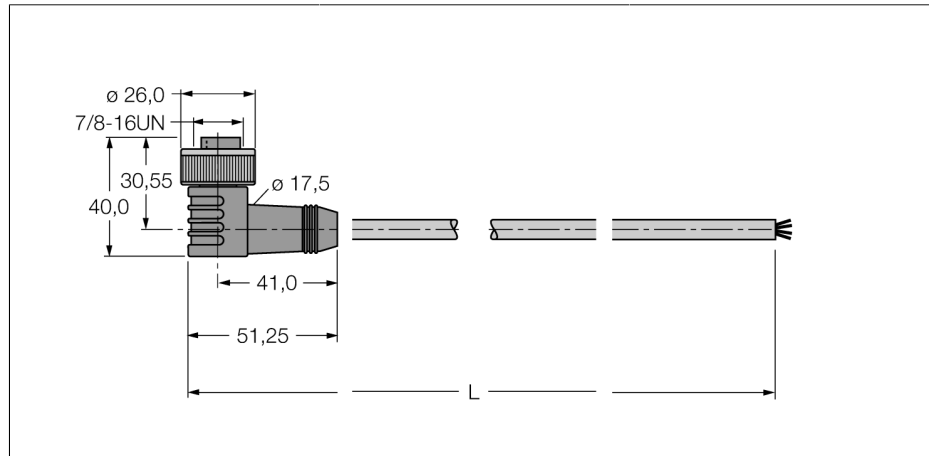

Conductor cross-section

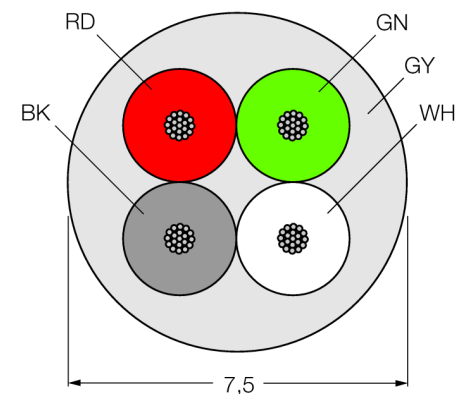

pin configuration left



Type code	WKM43-10M
Ident no.	6913941
Connector A side	
Number of pins	female connector, 7/8", angled
Contact carriers	4
Grip	plastic, TPU, black
Coupling nut/screw	plastic, PUR, black
Protection class	CuZn, nickel-plated
	IP67
Cable	
Cable type	43
Cable diameter	power supply 4 x 1.5 mm ²
Cable length	7.5mm
Cable sheath	10m
Shield	PUR, grey
Core insulation	no
Core colors	PP
Core cross-section	BK, RD, GN, WH
Litz wire arrangement	4x1.5mm ²
Nom. Impedance	84x0.15 mm
Core cross-section	- Ω
Rated current	5x1.5mm ²
DC resistance	15 A
	13.3 Ω
Rated voltage [Umax]	
Ambient temperature at rest	240 V
In moving state	-40 ... 90°C
Approvals	0 ... 90°C
Trailing capability	-
resistance to oil	yes
halogen-free	yes