



**Power cable for CAN (DeviceNet™, CANopen)**  
**PUR cable jacket, 4-pole**  
**WKM43-15M**


- Power cable: 4 x 1.5 mm<sup>2</sup>)
- PUR jacket, grey
- Jacket diameter: 7.5 mm
- Qualified for drag chain use
- Oil-resistant and flame-retardant
- Halogen-free
- Open end
- 7/8" female, angled
- Cable length: 15 m

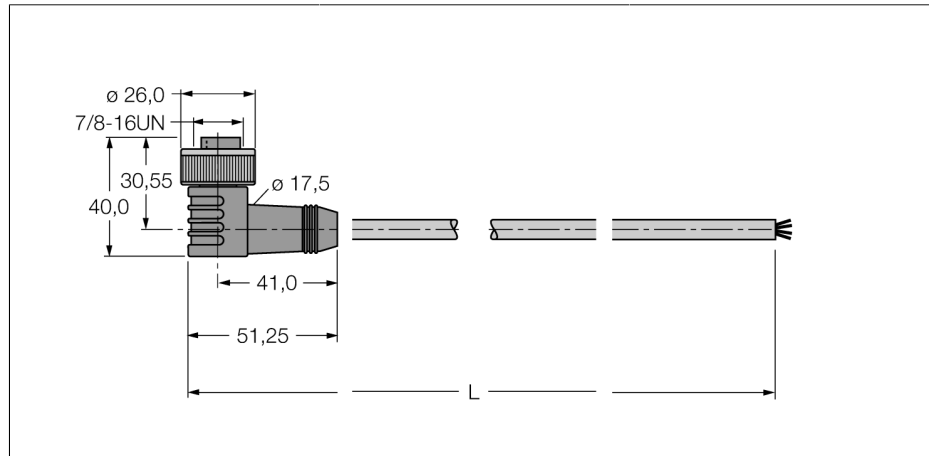

**Conductor cross-section**

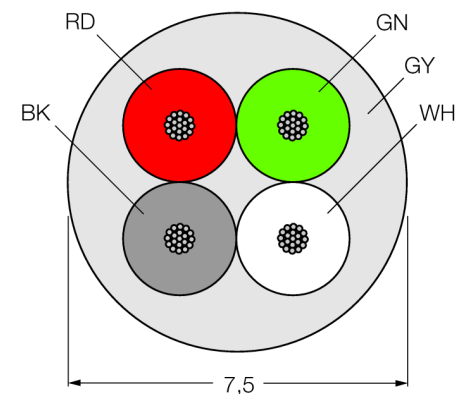

**pin configuration left**



<b>Type code</b>	WKM43-15M
Ident no.	6913942
<b>Connector A side</b>	
Number of pins	female connector, 7/8", angled
Contact carriers	4
Grip	plastic, TPU, black
Coupling nut/screw	plastic, PUR, black
Protection class	CuZn, nickel-plated
	IP67
<b>Cable</b>	
Cable type	43
Cable diameter	power supply 4 x 1.5 mm <sup>2</sup>
Cable length	7.5mm
Cable sheath	15m
Shield	PUR, grey
Core insulation	no
Core colors	PP
Core cross-section	BK, RD, GN, WH
Litz wire arrangement	4x1.5mm <sup>2</sup>
Nom. Impedance	84x0.15 mm
Core cross-section	- Ω
Rated current	5x1.5mm <sup>2</sup>
DC resistance	15 A
	13.3 Ω
<b>Rated voltage [Umax]</b>	
Ambient temperature at rest	240 V
In moving state	-40 ... 90°C
Approvals	0 ... 90°C
Trailing capability	-
resistance to oil	yes
halogen-free	yes