


power cable
PUR cable jacket, 5-pole
WSM52-10M


TURCK

Industrial
Automation

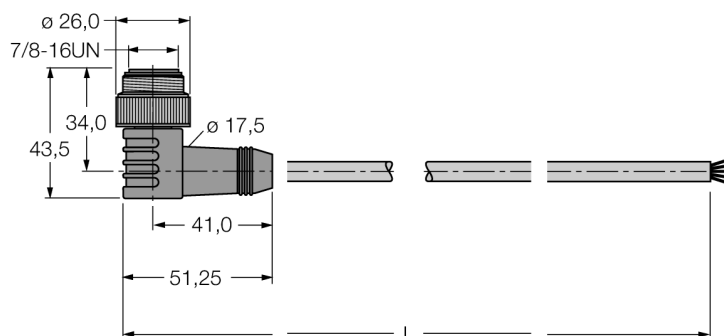

- Power cable: 5 x 1.5 mm²
- Jacket material: PUR, grey
- Jacket diameter: 8.5 mm
- Qualified for drag chain use
- Oil-resistant and flame-retardant
- Halogen-free
- Open end
- 7/8" male, angled
- Cable length: 10 m

Conductor cross-section

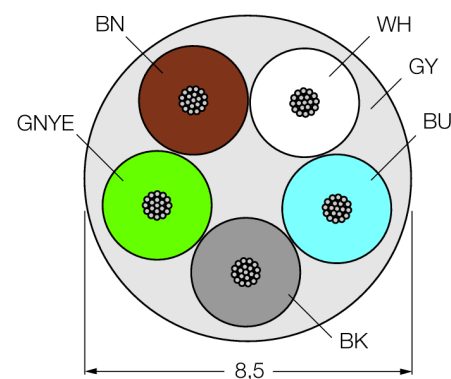

pin configuration left



Type code	WSM52-10M
Ident no.	6604790
Connector A side	male connector, 7/8", angled
Number of pins	5
Contact carriers	plastic, TPU, black
Grip	plastic, PUR, black
Coupling nut/screw	CuZn, nickel-plated
Protection class	IP67
Cable	52
Cable type	power supply 5 x 1.5 mm ²
Cable diameter	8.5mm
Cable length	10m
Cable sheath	PUR, grey
Shield	no
Core insulation	PP
Core colors	BN, WH, BU, BK, GNYE
Core cross-section	5x1.5mm ²
Litz wire arrangement	84x0.15 mm
Nom. Impedance	- Ω
Core cross-section	5x1.5mm ²
Rated current	15 A
DC resistance	13.3 Ω
Rated voltage [U_{max}]	240 V
Ambient temperature	
at rest	-40 ... 90°C
In moving state	0 ... 90°C
Approvals	-
Trailing capability	yes
resistance to oil	yes
halogen-free	yes