



**Connection cable
female M16 x 0,75
WMKAU19.001-2/S1118**

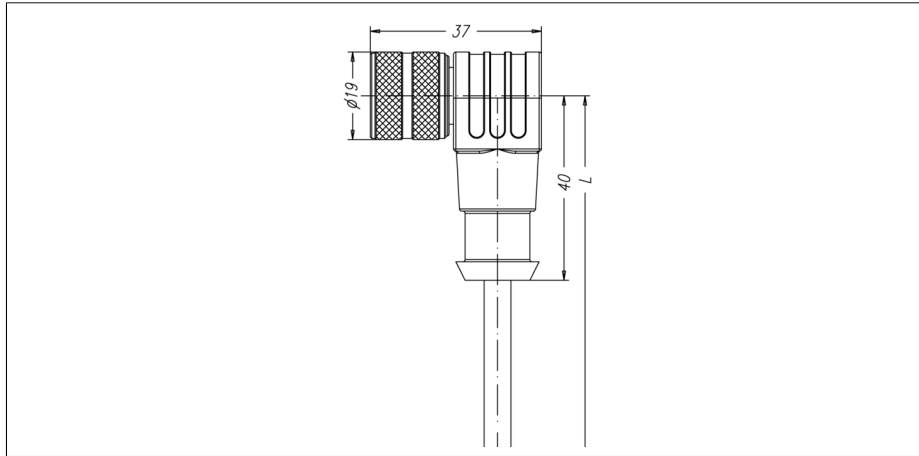

- Field-wireable and overmoulded connection cable
- Other cable lengths available

Wiring diagram

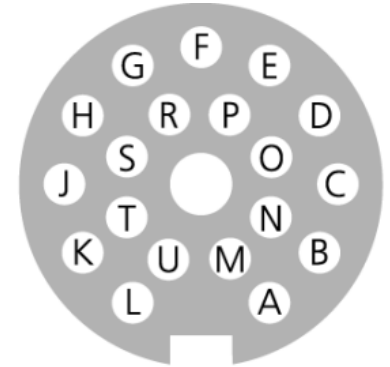

- | | |
|----------|----------|
| A: WH/GY | K: YE/BN |
| B: WH/YE | L: GY/BN |
| C: GN | M: BN |
| D: RD | N: YE |
| E: GY/PK | O: GY |
| F: PK | P: WH/GN |
| G: RD/BU | R: WH |
| H: BK | S: VT |
| J: BN/GN | T: n.c. |
| | U: BU |

Type code	WMKAU19.001-2/S1118
Ident no.	8022167
Connector A side	female connector, M16 x 0.75, angled
Number of pins	19
Contacts	metal, CuZn, gold-plated
Contact carriers	plastic, TPU, black
Grip	plastic, TPU, blue
Coupling nut/screw	metal, CuZn, nickel-plated
Seal	plastic, NBR
Mechanical lifespan	> 100 mating cycles
Pollution degree	3
Cable	S1118, LifYY-0
Cable diameter	8.5 mm
Cable length	2m
Cable sheath	PVC, BK
Core insulation	PVC
Core colors	WH/GY, WH/YE, GN, RD, GY/PK, PK, RD/BU, BK, BN/GN, YE/BN, GY/BN, YE, GY, WH/GN, WH, VT BU, BN
Core cross-section	14x0.25mm ² 4x0.5mm ²
Bending radius (mobile)	min. 10 x Ø cable
Rated voltage [U_{max}]	32 V
Insulation resistance	≥ 10 ⁸ Ω
Ampacity	6 A contacts A,L,M,U 2A all other contacts
Ambient temperature Connector	-30... +90°C
Cable ambient temperature	-40... +80°C

Cable quality S1118

Pure PVC cable, resistant to average mechanical strain. For use in packaging machinery as well as assembly and production lines. Good resistance to acids and alkaline solutions and thus suited for the Food& Beverage industry. Limited resistance to abrasion, conditional resistance to oils and chemicals.