

valve connectors
construction type A
TAS31-0.220-2/S90


TURCK

Industrial
Automation

- **PUR cable**
- **with trailing capability**

Cable quality S90

All-round cable with PUR cable jacket and PVC conductor insulation suited for use in tooling machinery, assembly and production lines and machining applications. The cable features good resistance against oils and chemicals and is highly abrasion-resistant. It is suited for trailing applications.

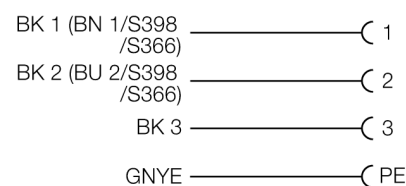

Type code	TAS31-0.220-2/S90
Ident no.	8025808
Cable	S90, LiYY11Y
Cable diameter	7.3 mm
Cable length	2m
Cable sheath	PUR/PVC, GY
Core insulation	PVC
Core colors	BK1, BK2, BK3, GNYE
Core cross-section	3x0.75mm ²
Core cross-section PE	1x0.75mm ²
Litz wire arrangement	40x0.15 mm
Litz wire design PE	40x0.15mm
Bending radius (mobile)	min. 10 x Ø cable
Rated voltage [Umax]	max. 230 V _{AC/DC}
Ampacity	10 A
Cable ambient temperature	-40... +80°C