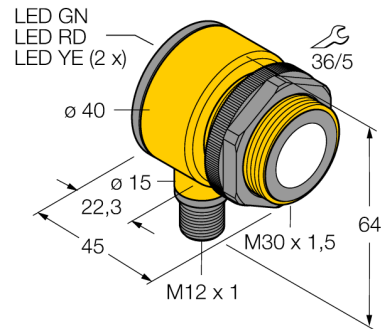


ultrasonic sensor
diffuse mode sensor
T30UUPBQ

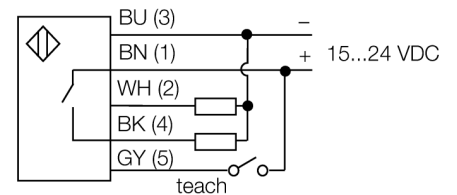
TURCK

Industrial
Automation



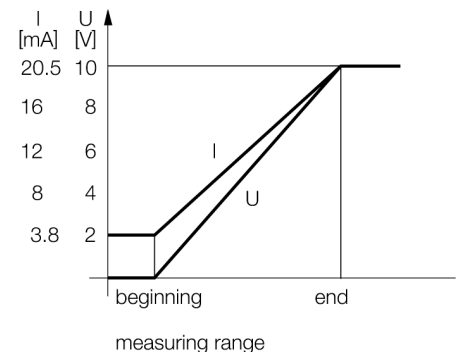
- compact housing style
- connection via M12 x 1 connector
- Operating voltage 15...24 VDC
- pnp transistor output and analogue output for voltage
- measuring range adjustable via teach-in

Wiring diagram



Functional principle

Ultrasonic sensors use ultrasonic waves for non-contact and wear-free detection of many objects. Regardless of whether the object is transparent or opaque, metallic or non-metallic, or of liquid, solid or powdery consistency. Even environmental conditions such as spray, dust or rain hardly affect their function.






Type code	T30UUPBQ
Ident no.	3055993
Design	cylindrical/threaded, T30
Dimensions	Ø40x 45 mm
Housing material	Plastic, Polyester
Connection	male, M12 x 1
Protection class	IP67
Ambient temperature	-20...+70 °C
Operating voltage	LED
Switching state	• yellow
Operating voltage	15...24VDC
DC rated operational current	≤ 150 mA
No-load current I ₀	≤ 50 mA
Output function	NO contact, PNP/analog output
Voltage output	0...10V
Switching frequency	10 Hz
Hysteresis	≤ 2.5 mm
Voltage drop at I ₀	≤ 1.5 V
Short-circuit protection	yes/ cyclic
Reverse polarity protection	complete
Wire breakage protection	yes
Range	30...200 cm
Ultrasound frequency	120 kHz
Repeatability	≥ ± 0.75 mm

ultrasonic sensor
diffuse mode sensor
T30UUPBQ

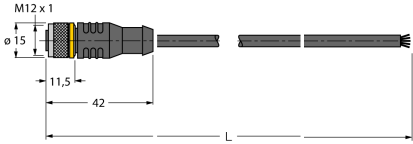
TURCK

Industrial
Automation

Accessories

Type code	Ident no.	Description	Dimension drawing
SMB30A	3032723	Mounting bracket, stainless steel, for sensors with 30 mm thread	
SMB1815SF	3053279	Mounting bracket, PBT black, for PICO-GUARD points	
SMB30FAM10	3011185	Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30 mm	

Wiring accessories

Type code	Ident no.	Description	Dimension drawing
RKC4.5T-2/TEL	6625016	Connection cable, female M12, straight, 5-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com	
WKC4.5T-2/TEL	6625028	Connection cable, female M12, angled, 5-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com	