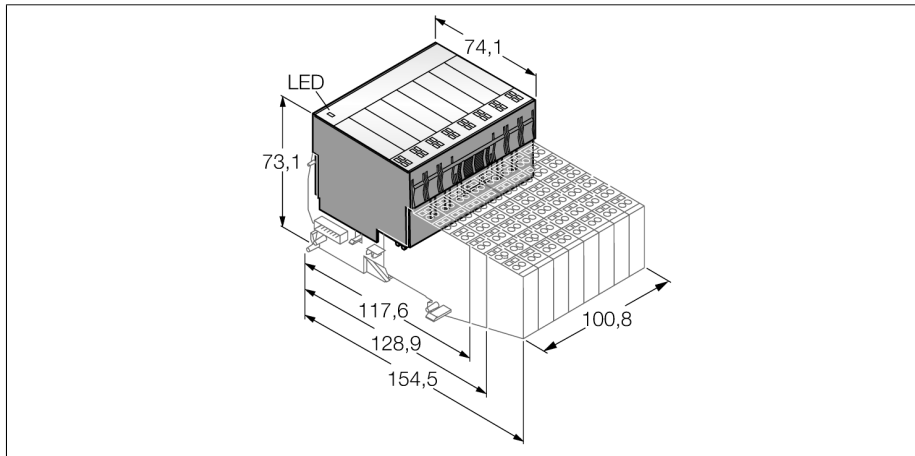


BL20 electronic module
32 digital inputs
BL20-32DI-24VDC-P

TURCK

Industrial
Automation



- Fieldbus and connection technology independent
- Protection class IP20
- LEDs indicate status and diagnostic
- Electronics galvanically separated from the field level via optocouplers
- 32 digital inputs, 24 VDC
- PNP switching

Functional principle


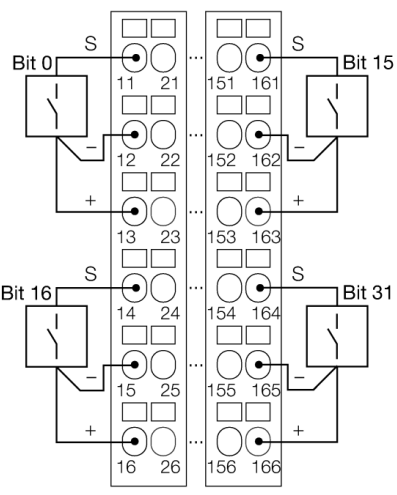
BL20 electronic modules are plugged into the purely passive base modules which are used for connection of field devices. Maintenance is significantly facilitated due to separation of the connection level from the module electronics. Furthermore flexibility is enhanced because the base modules provide a choice of tension spring or screw connection technology.

The electronic modules are completely independent of the type of higher level field bus through the use of gateways.

Type	BL20-32DI-24VDC-P
Ident-No.	6827015
Number of channels	32
Rated voltage from the supply terminal	24 VDC
Supply voltage	24 VDC
Rated current from field supply	≤ 30 mA
Rated current from module bus	≤ 45 mA
Power loss, typical	≤ 4.2 W
Inputs	
Input type	pnP
Low level signal voltage	-30 V ... +5 V
High level signal voltage	15 V ... 30 V
Low level signal current	< 1.5 mA
High level signal current	2 mA ... 10 mA
Input delay	< 0.2 ms
Electrical isolation	electronics for the field level
Connection technology	Screw, tension spring
Dimensions (W x L x H)	100.8x74.1x55.4mm
Approvals	CE, cULus, zone2, ClassI,div.2.
Operating temperature	0 ... +55 °C
Storage temperature	-25 ... +85 °C
Relative humidity	5 to 95% (internal), Level RH-2, no condensation (at 45 °C storage)
Vibration test	acc. to EN 61131
Shock test	acc. to IEC 68-2-27
Drop and topple	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Electro-magnetic compatibility	acc. to EN 50,082-2
Protection class	IP20

BL20 electronic module
32 digital inputs
BL20-32DI-24VDC-P

Compatible base modules

Dimension drawing	Type	Pin configuration
	BL20-B6T-SBBSBB 6827065 tension spring connection	Wiring diagram 
	BL20-B6S-SBBSBB 6827067 screw connection	