




**piconet® extension module for IP-Link**  
**8 digital outputs 0.5 A**  
**SNNE-0008D-0006**

- Direct connection to the IP link
- Fibre-glass reinforced housing
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67

**Output M8 x 1**

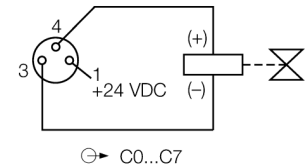

**Voltage supply M8 x 1**

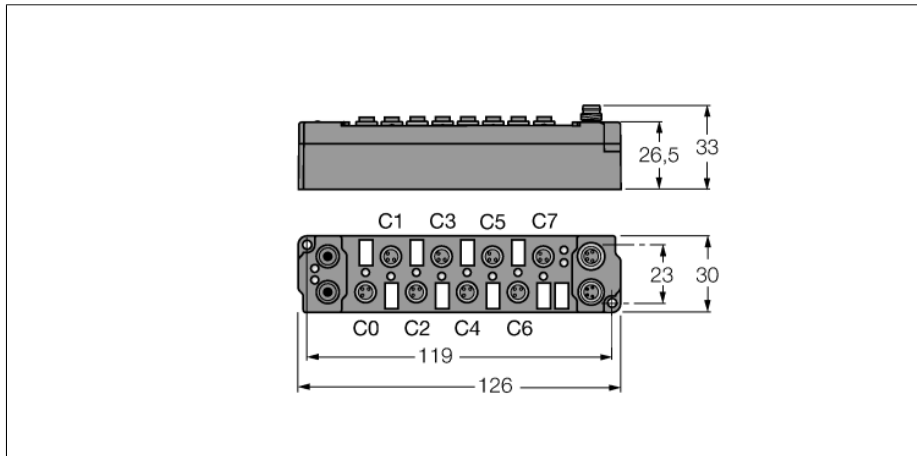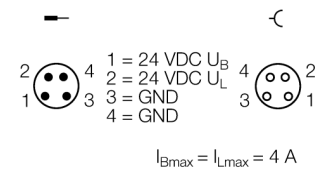

<b>Type code</b>	SNNE-0008D-0006
Ident no.	6824185
<b>Operating / load voltage</b>	20...29 VDC
Operating current	≤ 25 mA
<b>Fibre-optic length</b>	≤ 15 m
<b>Number of channels</b>	8 digital outputs acc. to EN 61131-2
Output voltage	20...29 VDC from load voltage
Output current per channel	0.5 A, short-circuit proof
Load type	resistive, inductive, lamp load
Switching frequency	≤ 500 Hz
Simultaneity factor	1
<b>Dimensions (W x L x H)</b>	30x126x26.5mm
Operating temperature	0...+55 °C
Storage temperature	-25 to 85 °C
Vibration test	as per EN 60068-2-6
Shock test	acc. to DIN EN 60068-2-27
Electro-magnetic compatibility	according to EN 61000-6-2/EN 61000-6-4
Protection class	IP67
Approvals	CE, cULus

**piconet® extension module for IP-Link**  
**8 digital outputs 0.5 A**  
**SNNE-0008D-0006**

Data in process image

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and byte n has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit user data are mapped.	<b>Output</b>	<b>Byte n (M8)</b>	C3P4	C2P4	C1P4	C0P4	is used by the physically preceding bit-oriented extension module connected via the P Link.			
		<b>Byte n (M12)</b>	C1P2	C1P4	C0P2	C0P4				
		<b>Byte n+1 (M8)</b>	is used by the physically following bit-oriented extension module connected via the P Link.				C7P4	C6P4	C5P4	C4P4
		<b>Byte n+1 (M12)</b>					C3P2	C3P4	C2P2	C2P4
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is active. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit user data are mapped.	<b>Output</b>	<b>Byte n (M8)</b>	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4	C0P4
		<b>Byte n (M12)</b>	C3P2	C3P4	C2P2	C2P4	C1P2	C1P4	C0P2	C0P4
		C... = Connector no. - P... = Pin no.								