


power cable
PUR cable jacket, 4 x 0.34 mm²
IPSKP4-5-SSP4/S90


TURCK

Industrial
Automation

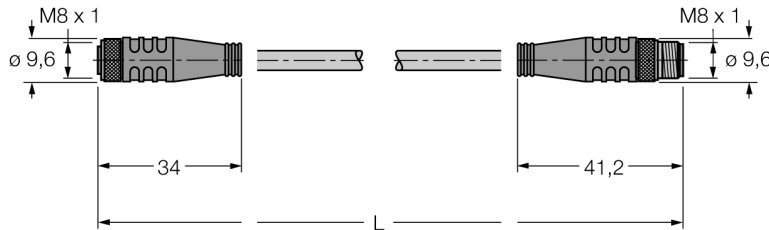


- Power cable: 4 x 0.34 mm²
- PUR jacket, black
- Jacket diameter: 4.8 mm
- M8 male, straight
- M8 female, straight
- Cable length: 5.0 m


Conductor cross-section

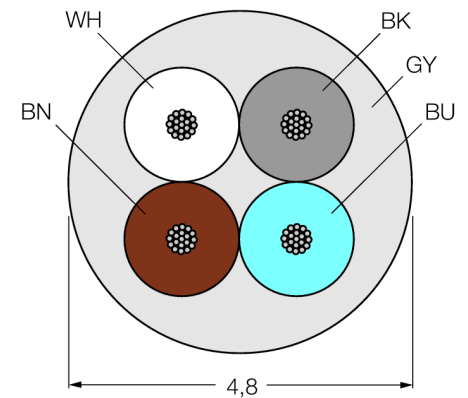

pin configuration left



Pin assignment right



Type code	IPSKP4-5-SSP4/S90
Ident no.	6900326
Connector A side	female connector, M8x1, straight
Number of pins	4
Contacts	metal, CuZn, gold-plated
Contact carriers	plastic, TPU, black
Grip	plastic, TPU, blue
Coupling nut/screw	CuZn, nickel-plated
Protection class	IP67
Connector B side	male connector, M8x1, straight
Number of pins	4
Contacts	metal, CuZn, gold-plated
Contact carriers	plastic, TPU, black
Grip	plastic, TPU, blue
Coupling nut/screw	metal, CuZn, nickel-plated
Protection class	IP67
Cable	IPS
Cable type	power supply 4 x 0.34mm ²
Cable diameter	4.8mm
Cable length	5m
Cable sheath	PUR, black
Shield	no
Bending radius (flexible use)	> 10 x Ø
Core insulation	PVC
Core colors	BN, BU, BK, WH
Core cross-section	4x0.34mm ²
Litz wire arrangement	43x0.1 mm
Rated current	4 A
Nom. Impedance	- Ω
DC resistance	58.7 Ω
Rated voltage [Umax]	240 V
at rest	-40 ... 80°C
Approvals	-
Trailing capability	yes
halogen-free	no