



compact fieldbus station for AS-interface
2 inputs, 2 outputs
FAS4-S0202G-A

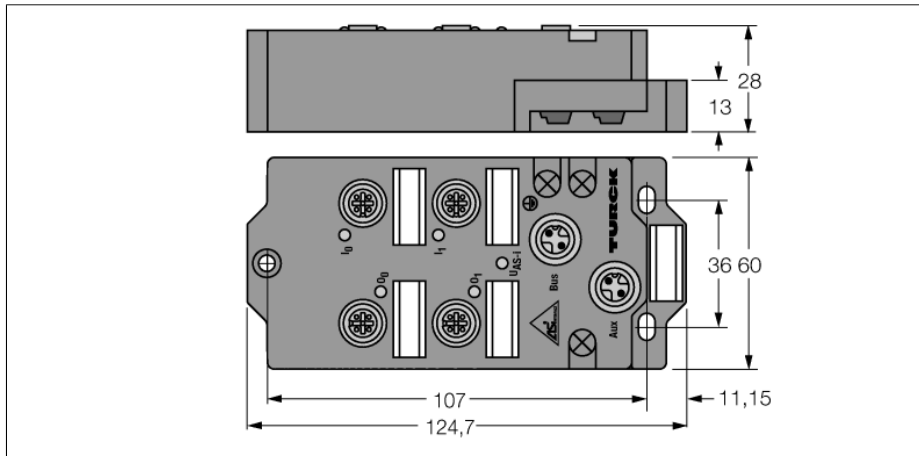

- Bus connected via AS-interface flat cable or male M12 x 1
- Field devices connected via male M12 x 1
- AS-i specification V2.1
- Short-circuit diagnostics
- Cast housing
- Protection class IP67
- Address range 1...31 A/B
- 2 inputs PNP
- 2 outputs PNP
- 24 VDC
- Additional power supply of the outputs


Type code	FAS4-S0202G-A
Ident no.	6821327
Operating / load voltage	18...31 (AS-i) VDC
internal power consumption	<20 mA plus I/O supply
Fieldbus addressing range	1...31 A/B
Fieldbus addressing	AS-i addressing tool
Inputs	
Number of channels	2
Low level signal current	<2 mA at 24 VDC
High level signal current	3...3.4 mA at 24 VDC
Input delay	2.5 ms
Max. input current	Total: 200 mA
Number of channels	2
Output current per channel	700 mA (Aux)
Short-circuit protection	yes
LEDs Bus	I/O: green = on . red = short-circuit (outputs) AS-i green = OK . red/green = fault
Dimensions (W x L x H)	60x124.7x28mm
Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Mounting	4 mounting holes Ø 5,4 mm
Operating temperature	-25°C...70°C
Protection class	IP67

Fieldbus




input M12 x 1

3-wire pnp sensor



Output M12 x 1

DC actuator



Power supply

