




**General Description**

Silicon VDMOS and LDMOS transistors designed specifically for broadband RF applications. Suitable for Military Radios, Cellular and Paging Amplifier Base Stations, Broadcast FM/AM, MRI, Laser Driver and others.

"Polyfet"<sup>TM</sup> process features gold metal for greatly extended lifetime. Low output capacitance and high  $F_t$  enhance broadband performance

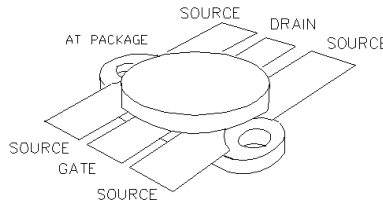

**PATENTED GOLD METALIZED SILICON GATE ENHANCEMENT MODE RF POWER VDMOS TRANSISTOR**

**40 Watts Single Ended**

**Package Style AT**

**HIGH EFFICIENCY, LINEAR, HIGH GAIN, LOW NOISE**

**ABSOLUTE MAXIMUM RATINGS (TC = 25 °C)**

Total Device Dissipation	Junction to Case Thermal Resistance	Maximum Junction Temperature	Storage Temperature	DC Drain Current	Drain to Gate Voltage	Drain to Source Voltage	Gate to Source Voltage
120 Watts	1.5 °C/W	200 °C	-65°C to 150°C	6 A	50 V	50V	30V

**RF CHARACTERISTICS ( 40WATTS OUTPUT )**


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Gps	Common Source Power Gain	10			dB	$I_{dq} = 1.2 A, V_{ds} = 12.5V, F = 175 MHz$
$\eta$	Drain Efficiency		60		%	$I_{dq} = 1.2 A, V_{ds} = 12.5V, F = 175 MHz$
VSWR	Load Mismatch Tolerance			20:1	Relative	$I_{dq} = 1.2 A, V_{ds} = 12.5V, F = 175 MHz$

**ELECTRICAL CHARACTERISTICS (EACH SIDE)**


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Bvdss	Drain Breakdown Voltage	40			V	$I_{ds} = 0.15 A, V_{gs} = 0V$
$I_{dss}$	Zero Bias Drain Current			3	mA	$V_{ds} = 12.5V, V_{gs} = 0V$
$I_{gss}$	Gate Leakage Current			1	uA	$V_{ds} = 0V, V_{gs} = 30V$
Vgs	Gate Bias for Drain Current	1		7	V	$I_{ds} = 0.3 A, V_{gs} = V_{ds}$
gM	Forward Transconductance		2.4		Mho	$V_{ds} = 10V, V_{gs} = 5V$
Rdson	Saturation Resistance		0.35		Ohm	$V_{gs} = 20V, I_{ds} = 24A$
$I_{dsat}$	Saturation Current		22.5		Amp	$V_{gs} = 20V, V_{ds} = 10V$
Ciss	Common Source Input Capacitance		120		pF	$V_{ds} = 12.5V, V_{gs} = 0V, F = 1 MHz$
Crss	Common Source Feedback Capacitance		18		pF	$V_{ds} = 12.5V, V_{gs} = 0V, F = 1 MHz$
Coss	Common Source Output Capacitance		90		pF	$V_{ds} = 12.5V, V_{gs} = 0V, F = 1 MHz$

# F1240


POUT VS PIN GRAPH

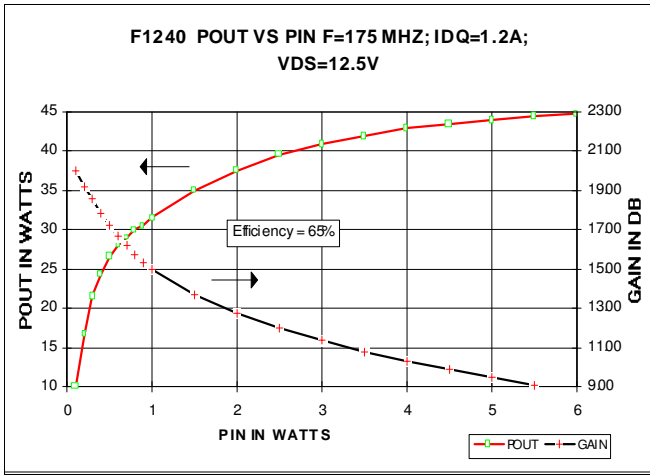


CAPACITANCE VS VOLTAGE

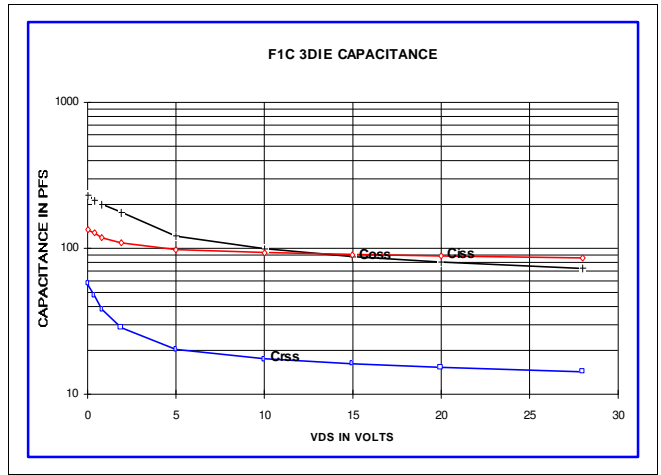


IV CURVE

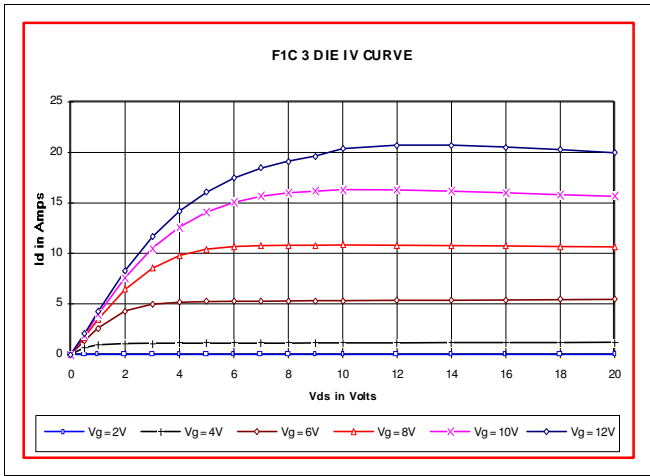


ID AND GM VS VGS

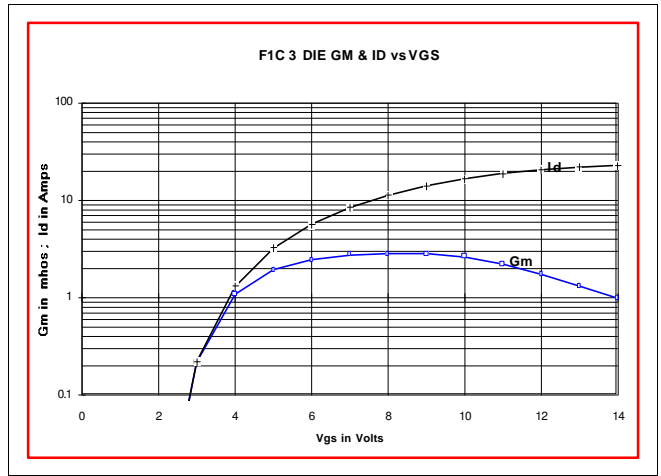

S11 AND S22 SMITH CHART

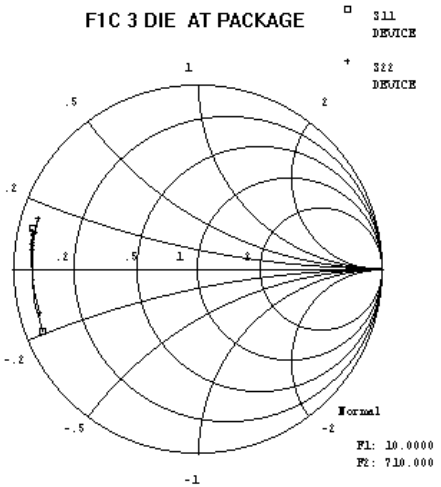

PACKAGE DIMENSIONS IN INCHES

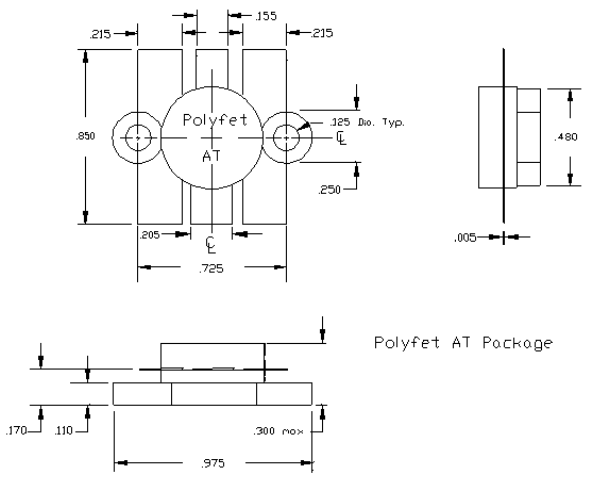

Tolerance 0.XX +/- 0.01 0.XXX +/- 0.005 inches