


# Rancho SysTech Inc

9155 Archibald Avenue, Ste 904  
Rancho Cucamonga, CA 91730  
909-987-3966 Fax 909-989-2365  
www.rancho.com

## iSCSI to Serial Attached SCSI Bridge

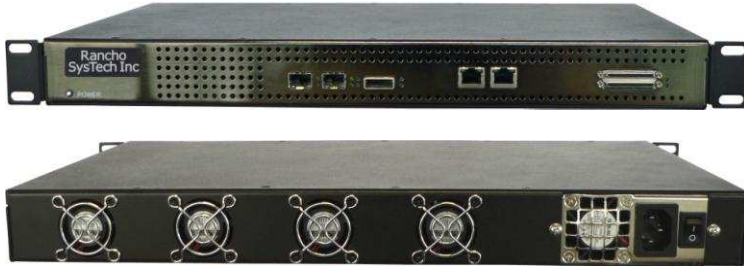

### Overview

The RSI-iSCSISAS-R iSCSI to SAS Bridge is a high performance protocol bridge for connecting SAS enabled peripherals such as Disks, Tape Drives, Tape Libraries and Optical devices to IPStorage Networks using the iSCSI protocol.

The RSI-iSCSISAS-R is housed in an industry standard 1U 19" rack mount enclosure with integral power supplies and cooling. Connectivity to the IP Network is via 2 auto-sensing 1Gb Ethernet ports that can detect the network connection speed and to the SAS peripheral devices via the 8 3Gb SAS ports.

Managing and installing the RSI-iSCSISAS-R could not be easier with its inbuilt intuitive GUI that is easy to use and provides the user with on screen help where necessary.

### Product Features

#### Ethernet Ports

Connection 2 x 1Gbe RJ45  
Speed Auto-sensing 10/100/1000Mb/s  
Error Recovery ERL0, ERL1, ERL2  
Maximum Packet Size 16Kb  
Maximum Initiators 16,000  
Standards IPv4, iSCSI, iSNS, CHAP, DHCP

#### SAS Ports

Connection 8x 3Gb, 2 x 4 way Mini-SAS

#### Visual Indicators

Power Network Activity  
Link Present Network Speed  
SAS Activity SAS Link

#### Physical

Enclosure Form Factor 19 " 1U Rack Mount  
Dimensions L 179 mm: W 437mm: H 44 mm  
Operational Temperature 0 to 40 °C  
Non-Operational Temperature -20 ° to 60 °  
Power Consumption: 110-230Vac: 25-Watts approx  
2 x 1Gb Ethernet Ports  
8 x 3Gb SAS Ports  
Up to 16,000 Initiators  
Non-Blocking Cache  
Low Power Design  
Error Recovery Level 2  
iSNS  
CHAP  
Jumbo Packet Support  
Multipath I/O  
GUI Interface

\*MPIO – Multipath Input-Output

### Key Advantages

**Performance** The RSI-iSCSISAS-R has many unique features to maximize performance and ensure your data is transferred to the peripheral devices in the shortest possible time. With its load balancing MPIO\* enabled Ethernet ports combined with its unique non-blocking data cache module, the RSI-iSCSISAS-R provides up to 200MB/s sustained throughput.

**Recoverability** Ensuring that your data reaches its final destination is important these days with tight backup windows. With Error Recovery Level 2 support, the RSI-iSCSISAS-R can continue to receive data even if one of the Ethernet connections is disconnected.

**Easy of Use** With every increasing pressure on IT staff, there is less time to spend on learning and managing new products and therefore, it is critical that new products are intuitive and easy to use. RSI works closely with its customers to ensure this is always the case.

**Environmental** The RSI-iSCSISAS-R uses the latest power supply technologies with typical efficiencies of 95%, which minimize electrical power consumption and heat output.

