
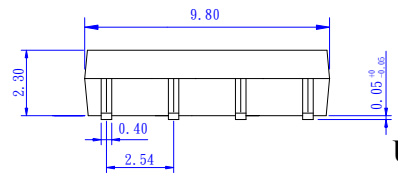




PRODUCT SPECIFICATION

DATE : 09/01/2006

| | | | |
|---|--|--------------|--------|
| cosmo ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT KAQW412S | NO.62M21004 | VER. 1 |
| | | SHEET 1 OF 7 | |




● OUTSIDE DIMENSION :



Unit : mm

Tolerance : ±0.2mm

● Operate / Reverse time

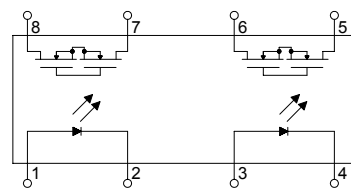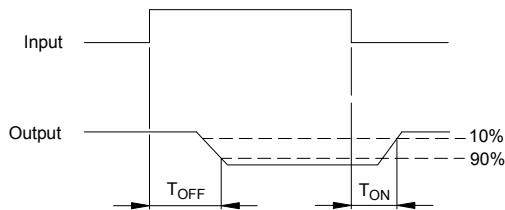

● Absolute Maximum Ratings

(Ta=25°C)

| Emitter (Input) | | Detector (Output) | |
|----------------------------------|----------------------|---------------------------------|-----------------|
| Reverse Voltage | 5.0V | Output Breakdown Voltage | ± 60V |
| Continuous Forward Current | 50mA | Continuous Load Current | ± 200mA |
| Peak Forward Current | 1A | Power Dissipation | 500mW |
| Power Dissipation | 100mW | | |
| Derate Linearly from 25°C | 1.3mW/°C | | |
| General Characteristics | | | |
| Isolation Test Voltage | 1500VACrms | Storage Temperature Range | -40°C to +125°C |
| Isolation Resistance | | Operating Temperature Range ... | -40°C to +85°C |
| Viso=500V , Ta=25°C | ≥ 10 ¹⁰ Ω | Junction Temperature | 100°C |
| Total Power Dissipation | 550mW | Soldering Temperature , | |
| Derate Linearly from 25°C | 2.5mW/°C | 2mm from case , 10 sec | 260°C |

PRODUCT SPECIFICATION

DATE : 09/01/2006




| | | | |
|---|-----------------------------------|--------------|------|
| cosmo ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT | NO.62M21004 | VER. |
| | KAQW412S | SHEET 2 OF 7 | 1 |

● Electro-optical Characteristics

(Ta=25°C)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit. | |
|--------------------------|-------------------|---|---------------------------------------|------|------|---------------|----------|
| Emitter (Input) | | | | | | | |
| Forward Voltage | V_F | $I_F=10\text{mA}$ | | 1.2 | 1.5 | V | |
| Operation Input Current | $I_{F\text{OFF}}$ | $V_L=\pm 20\text{V}$, $I_L \leq 5\mu\text{A}$ | | | 5 | mA | |
| Recovery Input Current | $I_{F\text{ON}}$ | $V_L=\pm 20\text{V}$, $I_L=100\text{mA}$, $t=10\text{ms}$ | 0.2 | | | mA | |
| Detector (Output) | | | | | | | |
| Output Breakdown Voltage | V_B | $I_B=50\mu\text{A}$ | 60 | | | V | |
| Output Off-State Leakage | $I_{T\text{OFF}}$ | $V_T=100\text{V}$, $I_F=10\text{mA}$ | | 0.2 | 2 | μA | |
| I/O Capacitance | C_{ISO} | $I_F=0$, $f=1\text{MHz}$ | | 6 | | pF | |
| ON Resistance | Connection | A | $I_L=100\text{mA}$, $I_F=0\text{mA}$ | | 2.5 | 5 | Ω |
| | | B | | | 1.25 | 2.5 | |
| | | C | | | 0.63 | 1.25 | |
| Operate Time | T_{OFF} | $I_F=10\text{mA}$, $V_L=\pm 20\text{V}$ | | 0.6 | 1.5 | ms | |
| Reverse Time | T_{ON} | $t=10\text{ms}$, $I_L=\pm 100\text{mA}$ | | 0.3 | 1.5 | ms | |

● MOS Relay Schematic and Wiring Diagrams
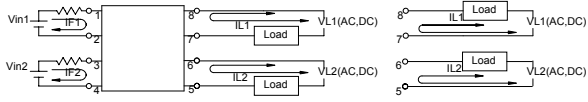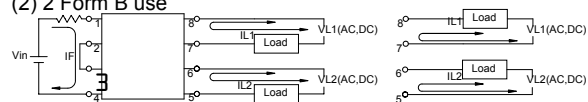
| Schematic | Output configuration | Load | Connection | Wiring Diagrams |
|---|----------------------|-------|------------|---|
|  | 2b | AC/DC | - | <p>(1) Two independent 1 Form B use</p>  <p>(2) 2 Form B use</p>  |

PRODUCT SPECIFICATION

DATE : 09/01/2006

cosmo
ELECTRONICS CORPORATION


SOLID STATE RELAY - MOSFET OUTPUT
KAQW412S

NO.62M21004
SHEET 3 OF 7


VER.
1

● Data Curve


Load current vs. ambient temperature
Allowable ambient temperature :
-40°C to +85°C

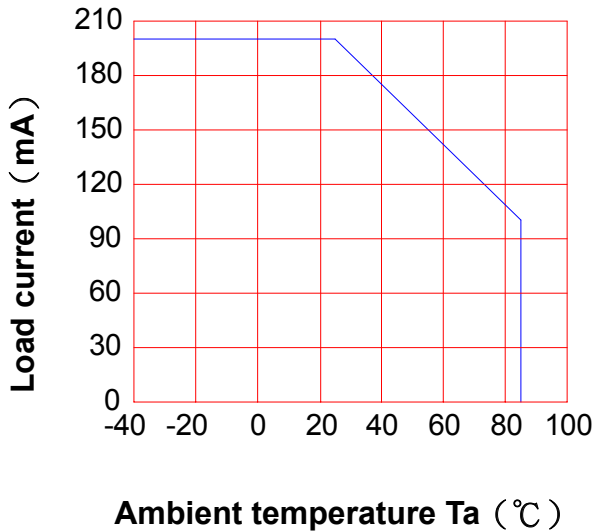


On resistance vs. ambient temperature
across terminals 5 , 7 and 6 , 8 pin
LED current : 5mA
Continuous load current : 200mA (DC)

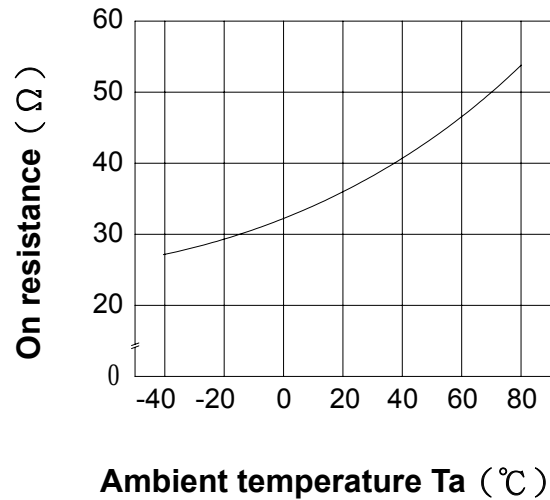

Operate (OFF) time vs. ambient
temperature
Load voltage 60V (DC)
LED current : 5mA
Continuous load current : 200mA (DC)

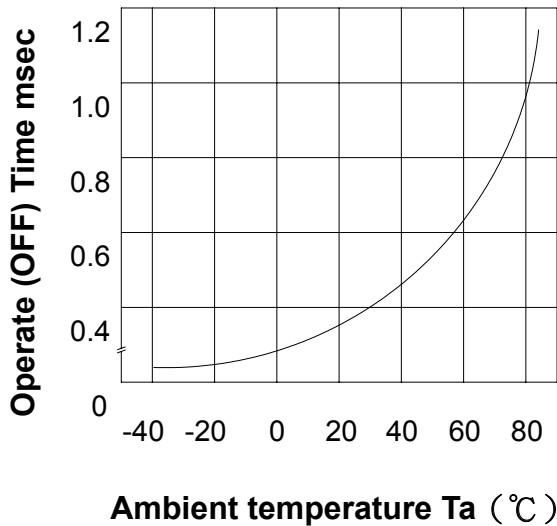

Reverse (ON) time vs. ambient
temperature
Load voltage 600V (DC)
LED current : 5mA
Continuous load current : 200mA (DC)

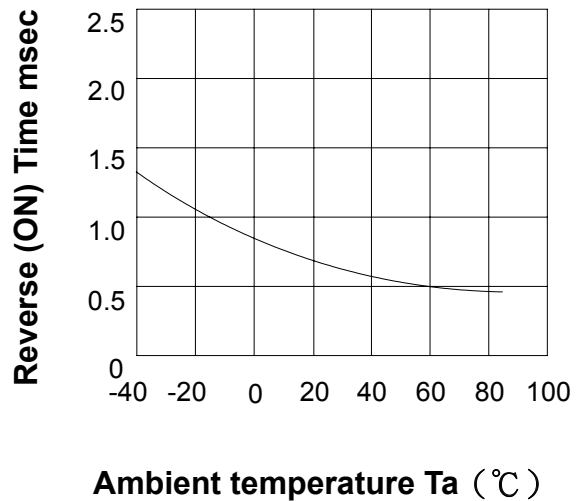

PRODUCT SPECIFICATION

DATE : 09/01/2006

cosmo
ELECTRONICS CORPORATION

SOLID STATE RELAY - MOSFET OUTPUT
KAQW412S

NO.62M21004
SHEET 4 OF 7


VER.
1

LED operate (OFF) current vs.
ambient temperature

Load Voltage : 60V (DC)

Continuous load current : 200mA (DC)

LED operate (OFF) current (mA)

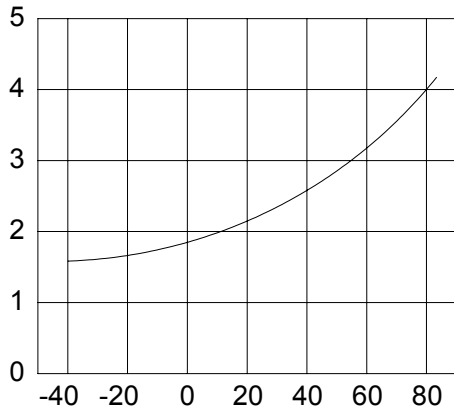


Ambient temperature Ta (°C)

LED Reverse (ON) current vs.
ambient temperature

Load Voltage : 60V (DC)

Continuous load current : 200mA (DC)

LED Reverse (ON) current (mA)

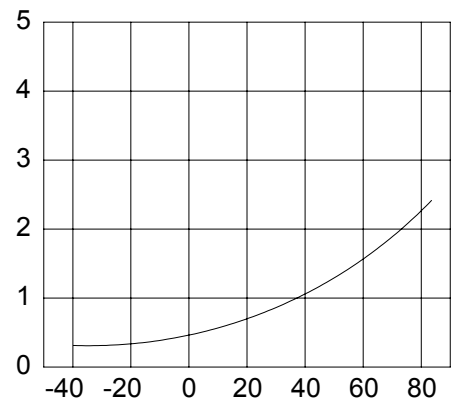


Ambient temperature Ta (°C)

LED dropout voltage vs.
ambient temperature

LED current : 5 to 50mA

LED dropout voltage (V)

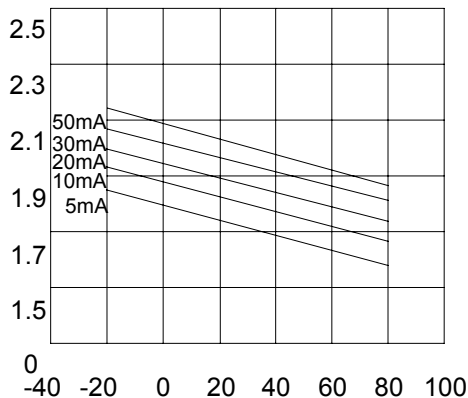

Ambient temperature Ta (°C)


Voltage vs. current characteristics of
output at MOSFET portion

Measured portion : across terminals

5, 7 and 6, 8 pin

Ambient temperature : 25°C

Voltage VS. Current
Characteristics

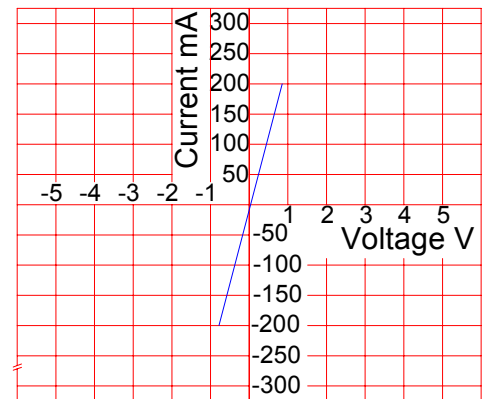

PRODUCT SPECIFICATION

DATE : 09/01/2006


cosmo
ELECTRONICS CORPORATION

SOLID STATE RELAY - MOSFET OUTPUT
KAQW412S


NO.62M21004
SHEET 5 OF 7

VER.
1


LED forward current vs. Operate (OFF) time across terminals 5 , 7 and 6 , 8 pin
Load voltage : 60V (DC)
Continuous load current : 200mA (DC)
Ambient temperature : 25°C

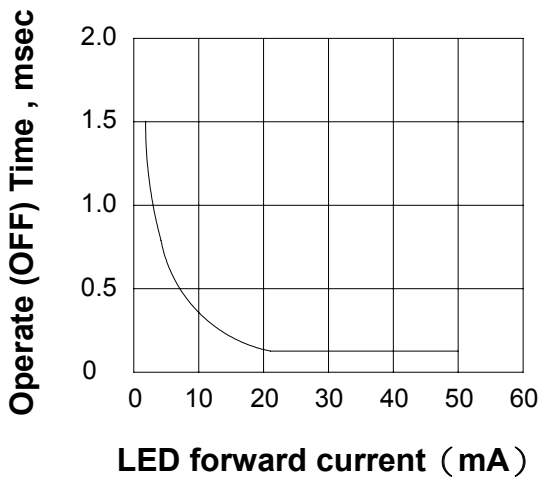


Off state leakage current
Across terminals 5 , 7 and 6 , 8 pin
Ambient temperature : 25°C

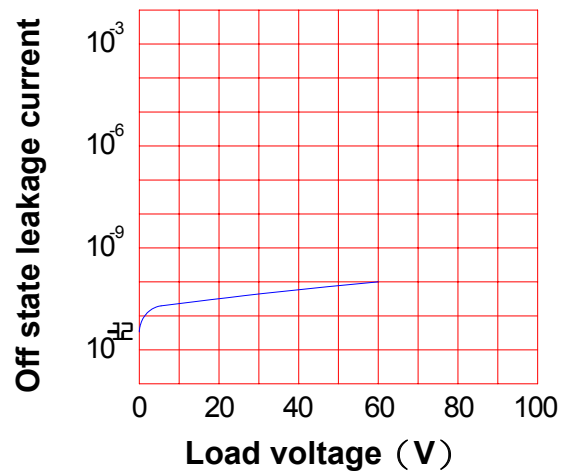

LED forward current vs. Reverse (ON) time
Across terminals 5 , 7 and 6 , 8 pin
Load voltage : 60V (DC)
Continuous load current : 200mA (DC)
Ambient temperature : 25°C

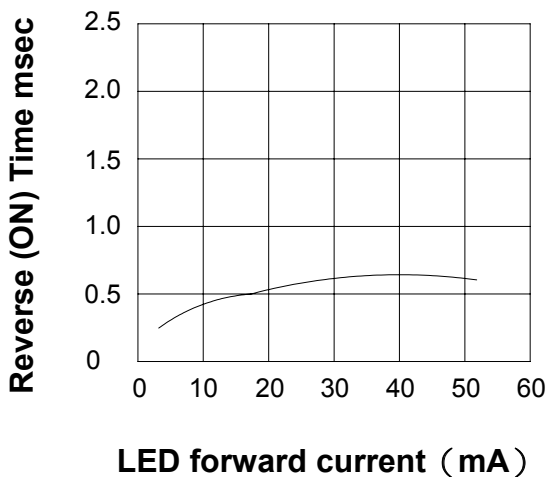

Applied voltage vs. output capacitance
Across terminals 5 , 7 and 6 , 8 pin
Frequency : 1MHz
Ambient temperature : 25°C

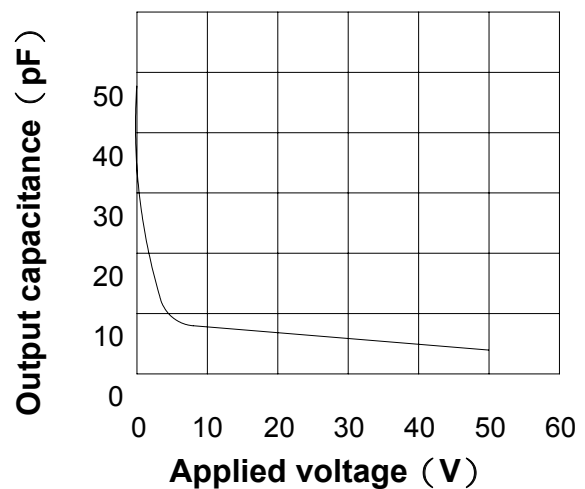

PRODUCT SPECIFICATION

DATE : 09/01/2006


| | | | |
|---|--|--------------|-----------|
| cosmo ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT KAQW412S | NO.62M21004 | VER. 1 |
| | | SHEET 6 OF 7 | |

● USING METHODS

Examples of resistance value to control LED forward current (I_F)


SSR-MOSFET OUTPUT

($I_F=5\text{mA}$)

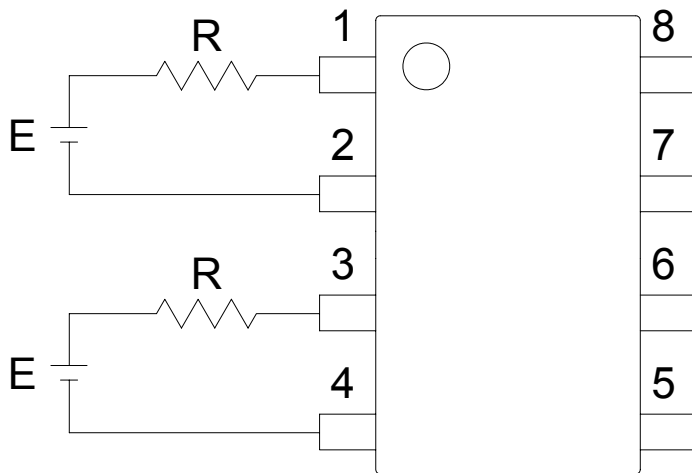

| E | R |
|------|-----------------------|
| 3.3V | Approx. 330 Ω |
| 5V | Approx. 640 Ω |
| 12V | Approx. 1.9K Ω |
| 15V | Approx. 2.5K Ω |
| 24V | Approx. 4.1K Ω |

- (1) LED forward current must be more than 5mA , at E min.
- (2) LED forward current must be less than 50mA , at E max.

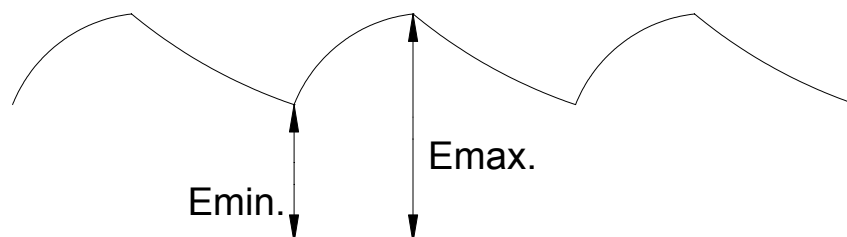

PRODUCT SPECIFICATION

DATE : 09/01/2006

cosmo
ELECTRONICS CORPORATION



SOLID STATE RELAY - MOSFET OUTPUT
KAQW412S

NO.62M21004
SHEET 7 OF 7

VER.
1

● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

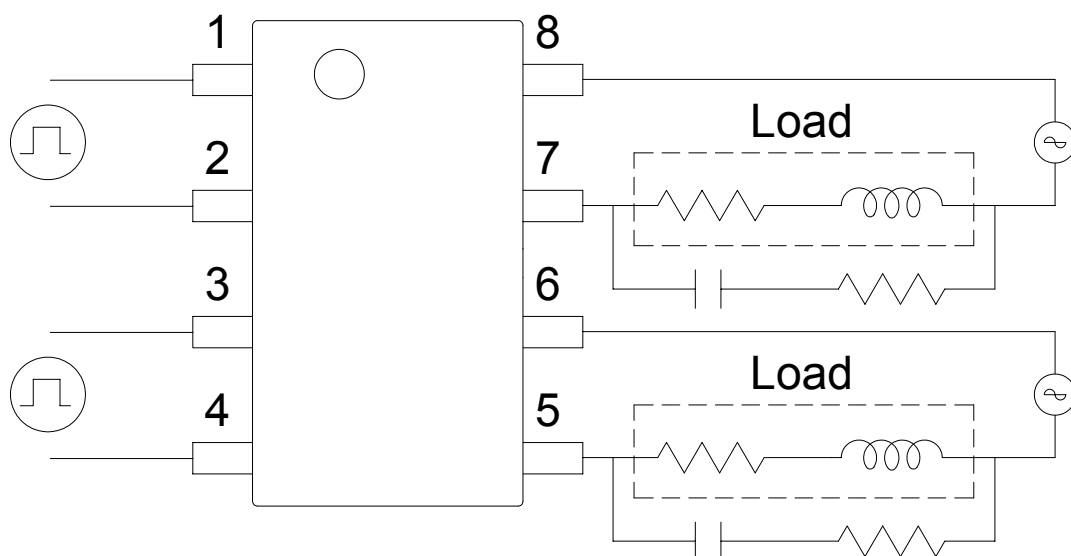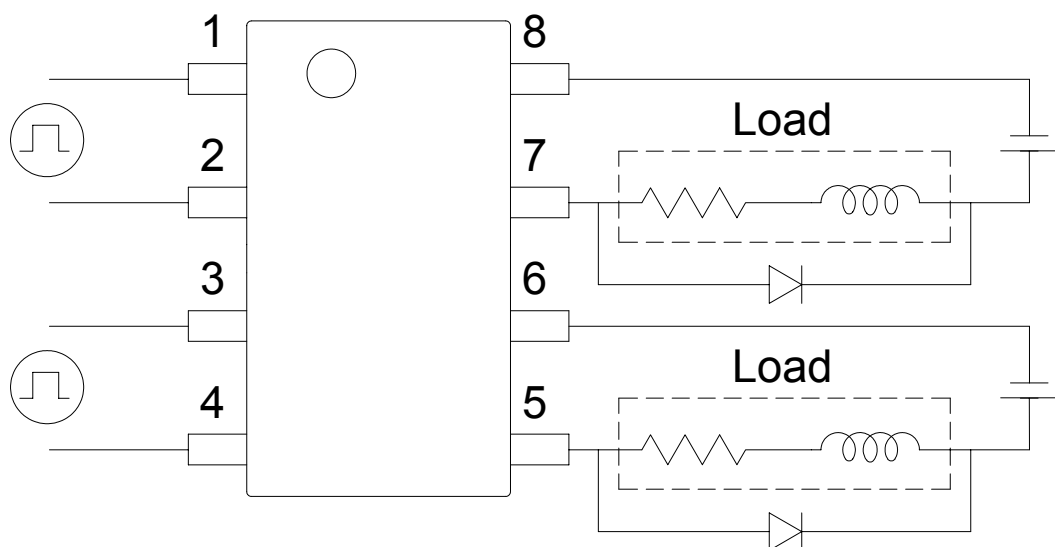

R-C Snubber