


PRODUCT SPECIFICATION

DATE: 08/23/02'


COSMO ELECTRONICS CORPORATION	REED RELAY: SS1A050000	NO. 50R06001	REV. 4
		SHEET 1 OF 2	

1. OUTSIDE DIMENSION : UNIT (mm)

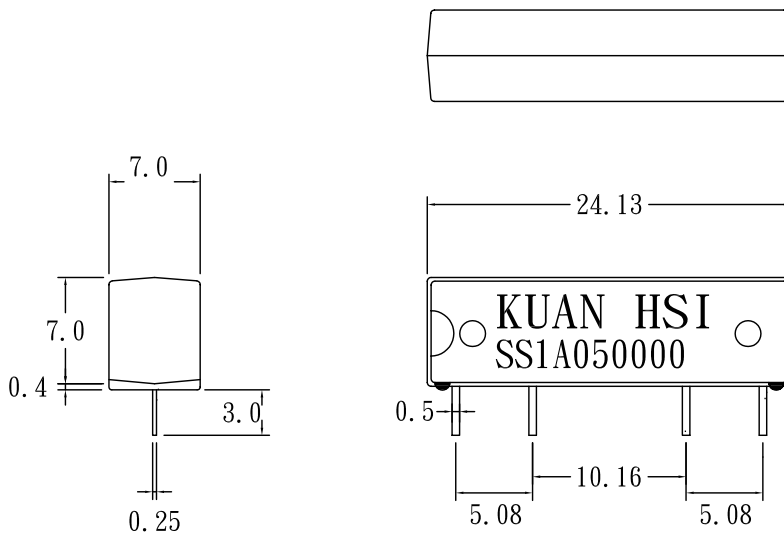

TOLERANCE : $\pm 0.1\text{mm}$

2. SCHEMATIC : TOP VIEW



PRODUCT SPECIFICATION

DATE: 08/23/02'

COSMO ELECTRONICS CORPORATION	REED RELAY:	NO. 50R06001	REV.
	SS1A050000	SHEET 2 OF 2	4

3.0 COIL RATINGS: (AT 20°C)

3.1	Coil resistance	500	Ω ($\pm 10\%$)
3.2	Nominal coil voltage	5	VDC
3.3	Maximum Continuous voltage	10	VDC
3.4	Must operate	3.75	VDC
3.5	Must release	1.0	VDC
3.6	Rated current	10	mA

4.0 ELECTRONICAL CHARACTERISTICS:

4.1	Contact resistance	(2V 100mA)	100	m Ω	(max)
4.2	Operate time		0.5	ms	(max)
4.3	Bounce time		0.5	ms	(max)
4.4	Release time		0.2	ms	(max)
4.5	Insulation resistance	(100 VDC open contact)	10 ¹¹	Ω	(min)
4.6	Power		10	VA	(max)
4.7	Switching voltage		200	VDC	(max)
4.8	Switching current		0.5	A	(max)
4.9	Carry current		1.0	A	(max)
4.10	Breakdown voltage	(across open contact)	250	VDC	(min)
		(between coil & contact)	2500	VDC	(min)
4.11	Life expectancy	(signal level)	10 ⁸		
4.12	Operating temp		-40 to 85°C		
4.13	Storage temp		-40 to 125°C		
4.14	Resonant frequency		3.5	KHZ	
4.15	Vibration (10-2000HZ)		20	g	(max)
4.16	Minimum permissible load		100	mVDC	10uA