


## KEY FEATURES

- Absolute pressure sensor die
- High reliability and low drift over lifetime
- High media compatibility
- Backside media access
- Wide temperature operating range
- Single side bond pad access

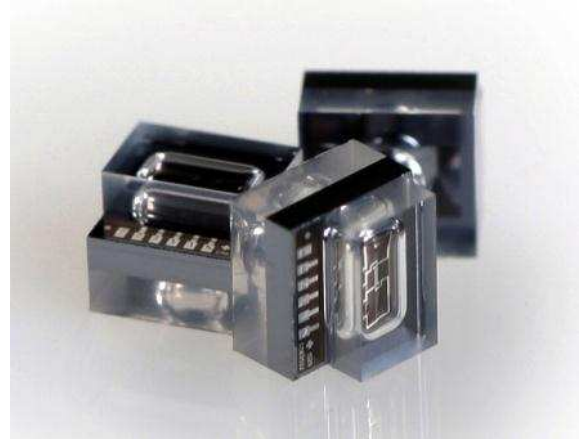

## DESCRIPTION

The SW414 is an uncompensated piezoresistive pressure sensor die. It is bulk micromachined and designed for affordable and reliable pressure measurements in a broad range of industrial application and designs.

### Media compatibility

SW414 has excellent media compatibility due to the patented triple stack sensor design with buried backside piezoresistive elements. With the backside media access, the piezo resistors will not come in contact with the measurement media. The design improves stability and sensor lifetime compared to many traditional sensor designs.

### Design and performance

The design and performance of SW414 makes it ideal for high accuracy measurements, also in harsh environments. The long term stability is outstanding and has been proven in applications during a period of more than 10 years.

The sensor die can be connected to passive compensation and or signal conditioning as required for a given application.

All sensor die products are 100% electrically tested and visually inspected.

SW414 is delivered as bare dies in waffle packs, as single wafers, or in wafer lots.

GENERAL CONDITIONS

Parameter	Min	Typ	Max	Comments
Operating supply voltage		5.0V		
Operating temperature	-40°C		125°C	
Operating pressure	0kPa		1500kPa	Absolute pressure
Overload pressure	3300kPa			
Breakdown voltage		14V		At I=5.0μA
Leakage current		0.2nA		At Vdd=4.0V




FUNCTIONAL CHARACTERISTICS (@25°C,5V)

Parameter	Typ	Unit
<b>Bridge resistor</b>		
Bridge resistance	3.7	kΩ
Temp.coeff.bridge resistor (1 <sup>st</sup> order)	1.5	10 <sup>-3</sup> /°C
Temp.coeff.bridge resistor (2 <sup>nd</sup> order)	9.0	10 <sup>-6</sup> /°C <sup>2</sup>
Common mode voltage	0.5*Vdd	V
<b>Sensitivity</b>		
Sensitivity	12	μV/VkPa / μV/Vg
Temp.coeff.sensitivity drift (1 <sup>st</sup> order)	-2.5	10 <sup>-3</sup> /°C
Non linearity	See separate chart	%FSO
<b>Zero point</b>		
Zero point	±2.6	mV/V
Temp.coeff.zero point (1 <sup>st</sup> order)	±20	μV/V°C


MECHANICAL DIMENSIONS

All dimensions in μm.


DIM	TYP
A	1780
B	1880
C	1450
D	525
E	400
F	525
G	150
H	120
H'	118
I	80
J	480
K	90
L	400
M	175
N	1025
O	940
P	800
Q	500

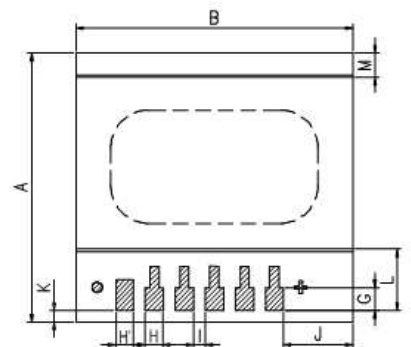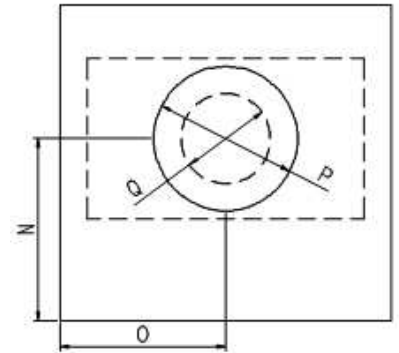

NON-LINEARITY



ELECTRICAL CIRCUIT DIAGRAM



ELECTRICAL CONTACTS

