

66125

**DUAL CHANNEL, HERMETICALLY SEALED 20 PIN LCC
VERY HIGH SPEED OPTOCOUPLER, SIMILAR TO 4N55**



6/30/03

Features:

- DSCC Drawing 87679032X
- 1500 Vdc isolation test voltage
- TTL and CMOS compatible
- 2mHZ bandwidth typical
- High radiation immunity
- Hermetic Package

Applications:

- Military and Space
- High reliability systems
- Voltage Level Shifting
- Isolated Receiver Input
- Communication systems
- Medical systems


DESCRIPTION

The **66125** optocoupler contains two completely isolated optocouplers in a hermetically sealed 20 pin LCC package. Each channel provides high switching speeds while providing high isolation (1500Vmin) over the full military temperature range (-55° to +125°C). The 66125 is available in standard and screened versions or tested to customer specifications.MIL-PRF-38534.

ABSOLUTE MAXIMUM RATINGS


Peak Forward Input Current	40mA (1ms duration)
Average Forward Input Current (each channel).....	20mA
Input Power Dissipation (each channel).....	40mW
Reverse Input Voltage (each channel).....	5V
Supply Voltage - V _{CC} (each channel)	-0.5V to 20V
Output Current - I _O (each channel)	20mA
Output Power Dissipation (each channel)..(derate linearly at a rate of 1.4mW/°C above 100°C)	50mW
Output Voltage - V _O (each channel).....	-0.5V to 20V
Base Current (each channel).....	5 mA
Storage Temperature	-65°C to +150°C
Operating Free-Air Temperature Range.....	-55°C to +125°C
Lead Solder Temperature (10 second)	260°C

Package Dimensions

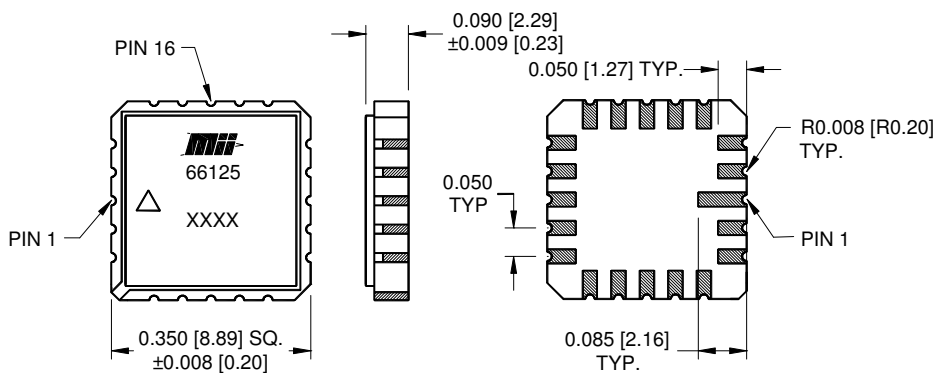

ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]

Schematic Diagram

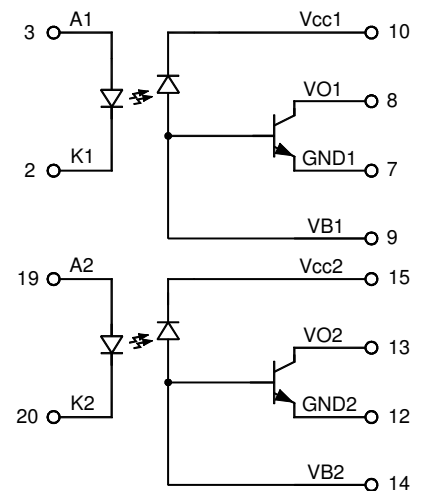

66125

6/30/03

**DUAL CHANNEL, HERMETICALLY SEALED 20 PIN LCC
VERY HIGH SPEED OPTOCOUPLER, SIMILAR TO 4N55****ELECTRICAL CHARACTERISTICS**T_a = -55°C to 125°C unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Current Transfer Ratio	CTR	9	20		%	I _F = 16mA, V _O = 0.4V, V _{CC} = 4.5V	1, 2
Output Leakage Current	I _{OH1}		70	250	μA	I _F = 250μA, V _{CC} = V _O = 18V I _F (other channel) = 20mA	1
Logic High Output Current	I _{OH}		20	100	μA	I _F = 0, V _{CC} = V _O = 18V I _F (other channel) = 20mA	1
High Level Output Current	I _{OCH}		0.2	10	μA	I _F = 0, V _{CC} = 18V I _F (other channel) = 20mA	1
Low Level Supply Current	I _{CC1}		35	200	μA	I _{F1} = I _{F2} = 20mA, V _{CC} = 18V	1
Input Forward Voltage	V _F		1.5	1.8	V	I _F = 20mA	1
Input Reverse Breakdown Voltage	BV _R	5			V	I _R = 10μA	1
Input-Output Insulation Leakage Current	I _{I-O}			1.0	μA	V _{I-O} = 1500Vdc, Relative Humidity = 45% t _A = 25°C, t = 5s	3
Propagation Delay Time To High Output Level	t _{PLH}		2	6	μs	I _F = 16mA, V _{CC} = 5V, R _L = 8.2kΩ C _L = 50pF	1
Propagation Delay Time To Low Output Level	t _{PHL}		0.4	2	μs	I _F = 16mA, V _{CC} = 5V, R _L = 8.2kΩ C _L = 50pF	1

TYPICAL CHARACTERISTICST_a = 25°C, V_{CC} = 5V Each Channel

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Input Capacitance	C _{IN}		120		pF	V _F = 0, f = 1MHz	1
Capacitance (Input-Output)	C _{I-O}		1.0		pF	f = 1MHz, V _F = 0	1, 4
Capacitance (Input-Input)	C _{I-I}		0.55		pF	f = 1MHz	3
Input Diode Temperature Coefficient	$\frac{\Delta V_F}{\Delta T_A}$		-1.9		mV/°C	I _F = 18mA	1
Resistance (Input-Output)	R _{I-O}		10 ¹²		Ω	V _{I-O} = 500Vdc	3
Input-Input Insulation Leakage Current	I _{I-I}		1		pA	Relative Humidity = 45% V _{I-I} = 500Vdc, t = 5s	3
Common Mode Transient Immunity at High Output Level	CM _H	500	1000		V/μs	V _{CM} = 50V p-p, R _L = 8.2kΩ, I _F = 0mA	1, 5
Common Mode Transient Immunity at Low Output Level	CM _L	500	1000		V/μs	V _{CM} = 50V p-p, R _L = 8.2kΩ, I _F = 16mA	1, 6

NOTES:

- Each channel.
- CURRENT TRANSFER RATIO is defined as the ratio of output collector current, I_O, to the forward LED input current, I_F, times 100%.
- Measured between each input pair shorted together.
- Measured between each input pair shorted together and the output pins for that channel shorted together.
- CM_H is the maximum tolerable common mode transient to assure that the output will remain in a high logic state (ie. V_O > @.0V).
- CM_L is the maximum tolerable common mode transient to assure that the output will remain in a low logic state (ie. V_O < 0.8V).

RECOMMENDED OPERATING CONDITIONS:

PARAMETER	SYMBOL	MIN	MAX	UNITS
Input Current, Low Level	I _{FL}	0	250	μA
Supply Voltage	V _{CC}	2	18	V

SELECTION GUIDE

PART NUMBER	PART DESCRIPTION
66125-001	Screened
66125-002	-55°C to +125°C mil-temp
66125-003	Commercial